


RCBO DX™ 6 000

RCBO up to 45 A - type AC

Residual current devices - type AC

Approval No: 19931

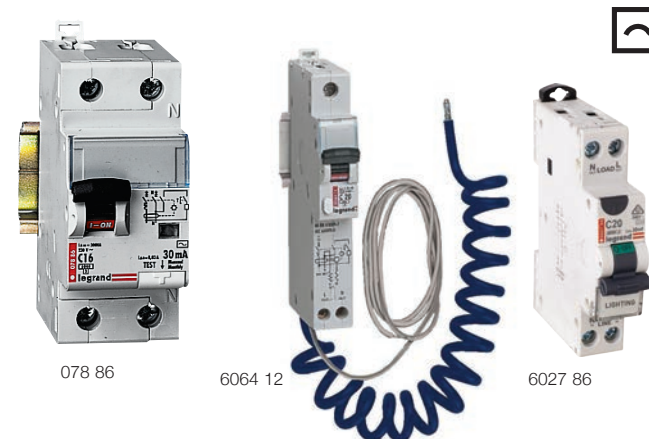

078 86

6064 12

6027 86



RCDs DX™

Residual current devices

Type AC

Approval No: 19931



089 28

090 12



Dimensions (p. 100)

Conform to AS/NZS61008-1

Pack	Cat. No.	Type AC		
		Single pole + neutral - 230V~		
		Neutral on right hand side		
		Breaking capacity 6000A		
		AS/NZS61009-1		
		Sensitivity	Nominal rating (A)	Number of modules
1	078 79	10mA	16	2
1	078 84	30mA	10	2
1	078 86	30mA	16	2
1	078 87	30mA	20	2
1	078 88	30mA	25	2
1	078 89	30mA	32	2
1	078 90	30mA	40	2

Pack	Cat. No.	Type AC		
		2 - pole - 230V~		
		Sensitivity	Nominal rating (A)	Number of modules
1	089 09	30mA	25	2
1	089 10	30mA	40	2
1	089 11	30mA	63	2
1	089 16	100mA	40	2
1	089 17	100mA	63	2
1	089 28	300mA	40	2

			Type AC Single pole + neutral - 230V~⁽¹⁾ Breaking capacity 10000 A - AS/NZS61009-1	
			AC type  30 mA	
	Black neutral leads	Blue neutral leads	Nominal rating (A)	Number of modules
1	6064 00	6064 10	10	1
1	6064 01	6064 11	16	1
1	6064 02	6064 12	20	1
1	6064 03	6064 13	25	1
1	6064 04	6064 14	32	1
1	6064 05	6064 15	45	1

		4 - pole - 400V~ Neutral on right-hand side		
		Sensitivity	Nominal rating (A)	Number of modules
1	089 93	30mA	25	4
1	089 94	30mA	40	4
1	089 95	30mA	63	4
1	089 96	30mA	80	4
1	090 00	100mA	40	4
1	090 12	300mA	40	4
1	090 13	300mA	63	4
1	090 14	300mA	80	4

(1) Single pole with solid unswitched neutral
"A" type of RCD/RCBO See HPM Catalogue section 1

		Type A				
		Single module RCBO				
		Breaking capacity 6kA				
		AS/NZS 61009				
		Sensitivity	Nominal rating (A)	Number of modules		
		1	602780	30mA	6	1
		1	602782	30mA	10	1
1	602783	30mA	16	1		
1	602784	30mA	20	1		
1	602785	30mA	25	1		
1	602786	30mA	30	1		