

LED CATALOGUE 2012/13





Crompton
Lighting





Pendants

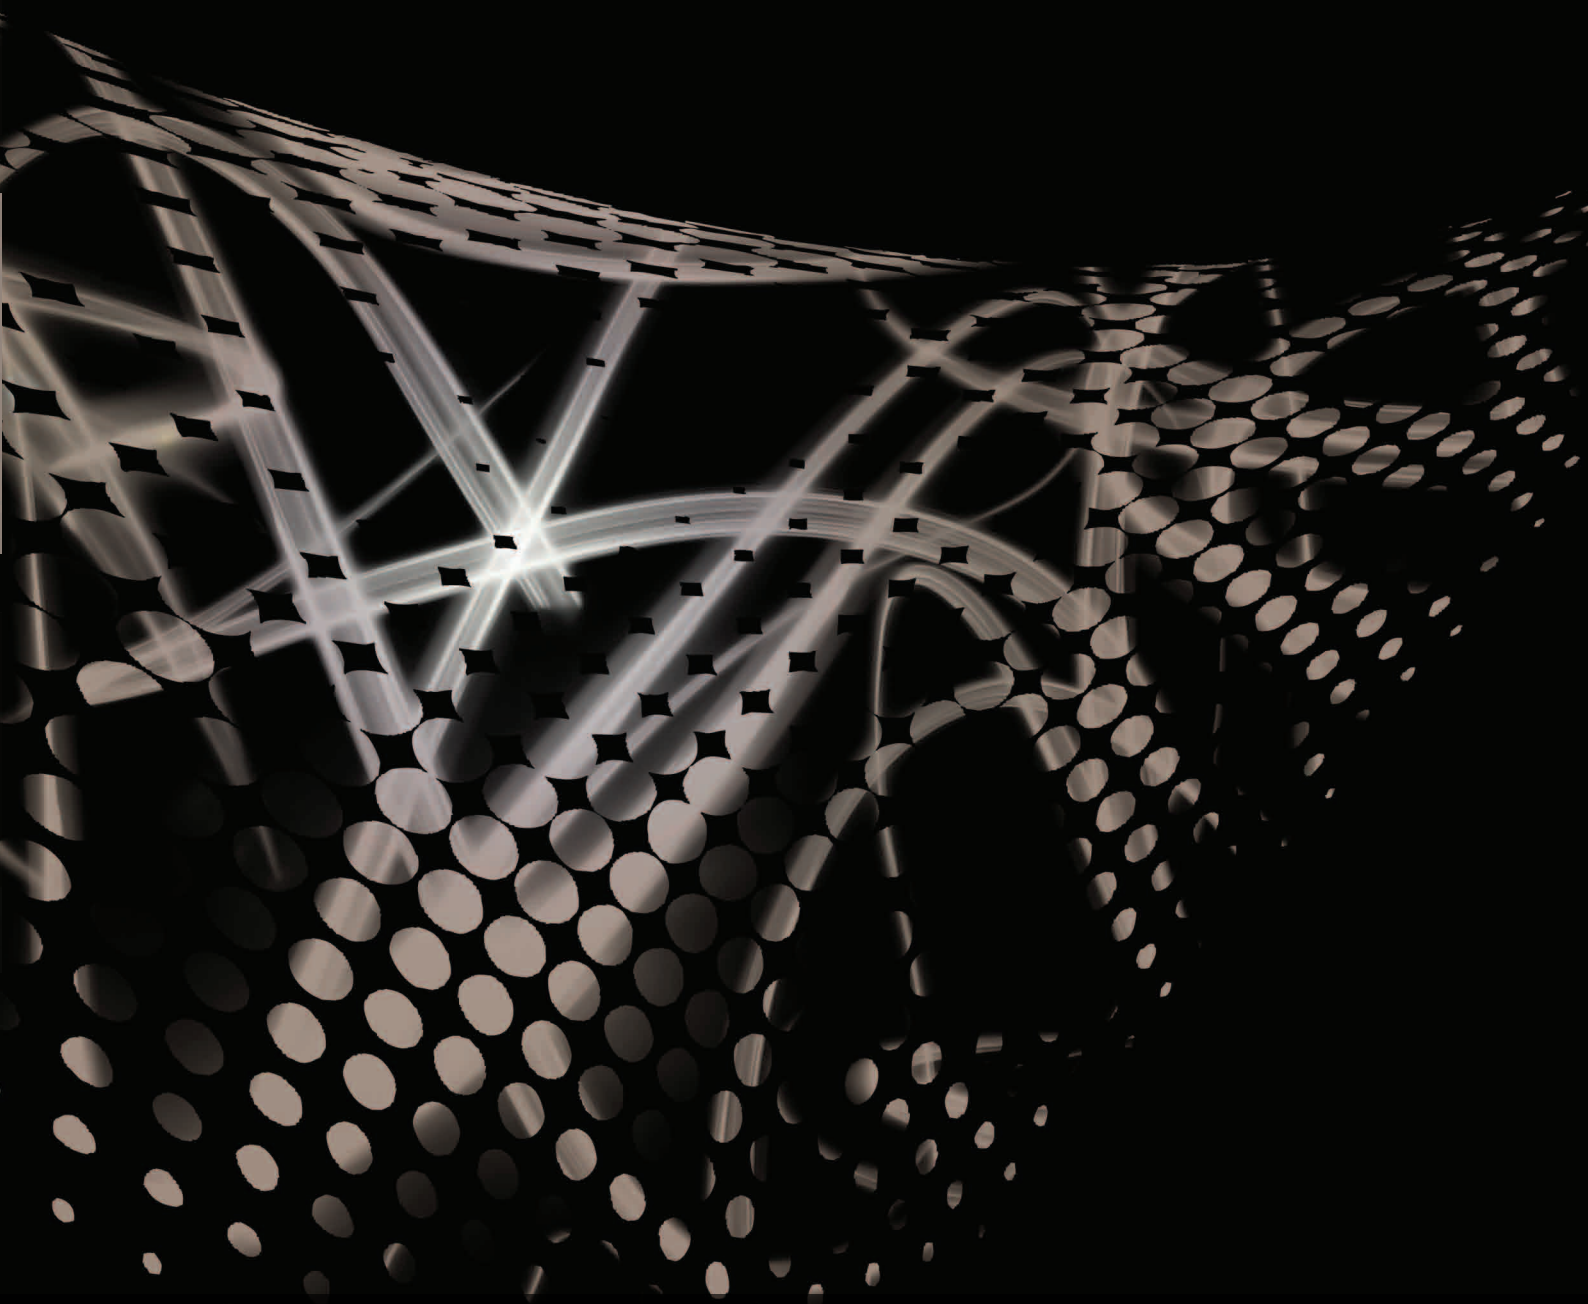

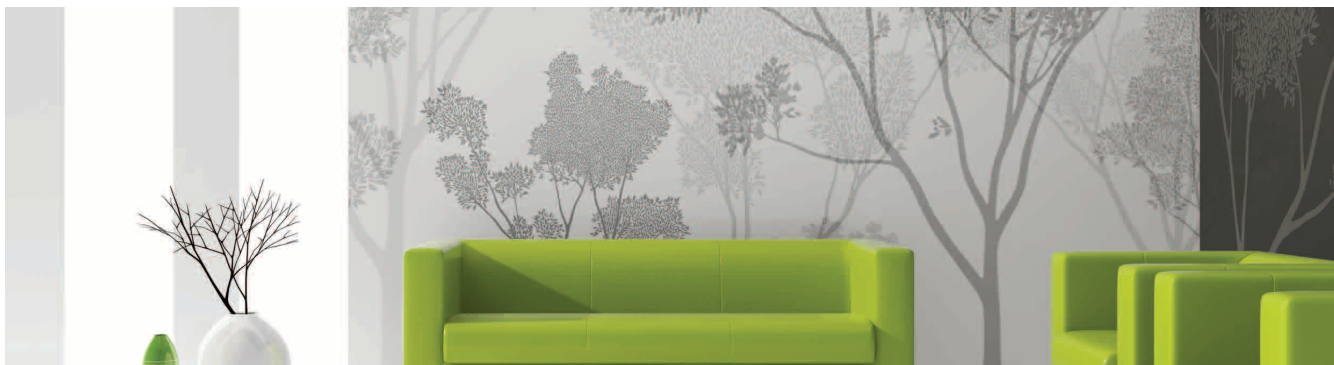

The LED Technology

LED Pendant Light

Crompton Lighting brings to market a comprehensive range of interior LED products to accent and complement any interior.


Offering a wide range of traditional and contemporary LED lighting solutions such as pendant lights, the user has endless possibilities for creating the ambience required for a host of differing tasks, including mood lighting through the choice of different available colour temperatures of the LED chip.

Utilizing LED chips and control systems from leading international manufacturers, Crompton Lighting ensures only quality components and materials are used for longevity and actual lighting performance.

Crompton continues to offer the latest energy efficient LED range suitable for enhanced home interior inspiration, whilst ensuring all products follow the latest trends in domestic and decorative lighting.



LED Pendant Light

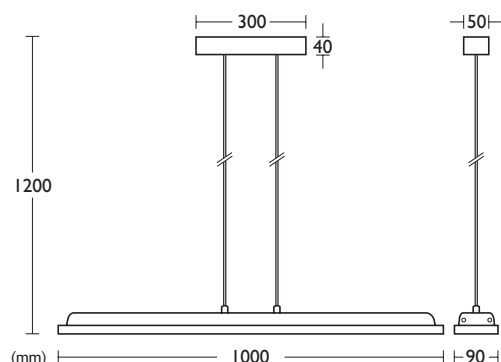

XL-LEDP0557B



PRODUCT FEATURES

- LED pendant light
- Rectangular glass diffuser attached to aluminium top cover with 5 LED's
- Chrome plated rectangular canopy with inbuilt LED driver and adjustable wires



PRODUCT SPECIFICATIONS

ELECTRICAL

Supply Voltage	230-240V AC
Supply Frequency	50-60Hz
Supply Current	0.15A
Power Factor	0.95
Total Input Power	16-36W
Secondary Output Voltage	3V - 24V
Secondary Output Current	500mA
Lamp Power	5 x 6W

MATERIALS

Body	Aluminium
Lens	Glass
Canopy	Chrome

THERMAL

Ambient Temperature Rating	25°C
Maximum Surface Temp	80°C

OPTICAL / PHOTOMETRIC

Luminous Flux	460 lumens
CRI	85
Colour Temperature	3000K
Beam Angle	150°

WEIGHT

Fitting	2.28Kg
LED Lamp Life	50,000HR




REFERENCE	COLOUR	CODE
XL-LEDP0557B	Chrome	26983

Pendant

LED 5 Light Pendant



PRODUCT SPECIFICATIONS

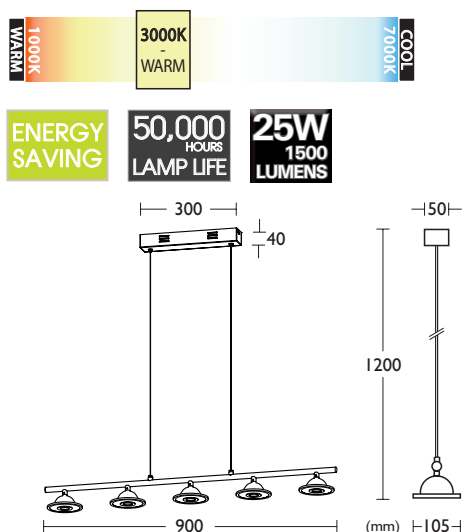

LED-0296A



WEIGHT / LIFE

Fitting	2.01 Kg
LED Lamp Life	50,000HR

ELECTRICAL

Supply Voltage	230-240V AC
Supply Frequency	50Hz
Supply Current	0.175A maximum
Power Factor	0.95
Total Input Power	26.5W
Secondary Output Voltage	20V - 62V DC
Secondary Output Current	500mA
Lamp Power	5 x 5W

MATERIALS

Body	Steel
Lens	Glass
Canopy	Chrome

THERMAL

Thermal Protection	Fully protected
Ambient Temperature Rating	50°C
Maximum Surface Temp	85°C

OPTICAL / PHOTOMETRIC

Luminous Flux	1500 lumens
CRI	80
Colour Temperature	3000K
Beam Angle	150°



PRODUCT FEATURES

- 5 light LED pendant
- Round glass plate attached to chrome body
- Frosted glass diffusers
- Chrome plated rectangular canopy with inbuilt LED driver and adjustable wires



REFERENCE	COLOUR	CODE
LED-0296A	Chrome	27083

LED Single Light Pendant

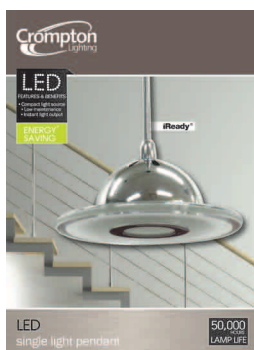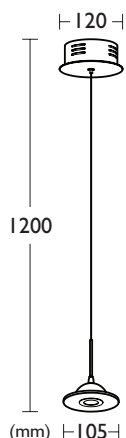

LED-P0295B

WEIGHT / LIFE

Fitting	480g
LED Lamp Life	50,000HR

PRODUCT FEATURES

- Single light LED pendant
- Round glass plate attached to chrome body
- Frosted glass diffuser
- Chrome plated canopy with inbuilt LED driver and adjustable wires



PRODUCT SPECIFICATIONS

ELECTRICAL

Supply Voltage	100-240V AC
Supply Frequency	50-60Hz
Supply Current	0.1A
Power Factor	0.5
Total Input Power	6W
Secondary Output Voltage	3V - 10V DC
Secondary Output Current	500mA
Lamp Power	5W

MATERIALS

Body	Steel
Lens	Glass
Canopy	Chrome

THERMAL

Thermal Protection	Fully protected
Ambient Temperature Rating	45°C
Maximum Surface Temp	85°C

OPTICAL / PHOTOMETRIC

Luminous Flux	320 lumens
CRI	80
Colour Temperature	3000K
Beam Angle	150°




REFERENCE	COLOUR	CODE
LED-P0295B	Chrome	27082

Pendant

LED Square Pendant Light



PRODUCT SPECIFICATIONS

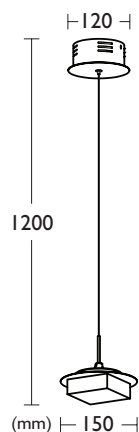

LED-P0106B

WEIGHT / LIFE

Fitting	830g
LED Lamp Life	30,000HR

ELECTRICAL

Supply Voltage	100-240V AC
Supply Frequency	50-60Hz
Supply Current	0.1A
Power Factor	0.5
Total Input Power	12W
Secondary Output Voltage	12V Max
Secondary Output Current	840mA
Lamp Power	10W

MATERIALS

Body	Steel
Lens / Diffuser	Acrylic
Canopy	Chrome

THERMAL

Thermal Protection	Fully protected
Ambient Temperature Rating	45°C
Maximum Surface Temp	85°C

OPTICAL / PHOTOMETRIC

Luminous Flux	950 lumens
CRI	80
Colour Temperature	3000K
Beam Angle	150°



PRODUCT FEATURES

- Single square light LED pendant
- Square clear acrylic diffuser with frosted inner finish attached to chrome plate
- Chrome plated canopy with inbuilt LED driver and adjustable wires



REFERENCE	COLOUR	CODE
LED-P0106B	Chrome	27081

LED Round Pendant Light

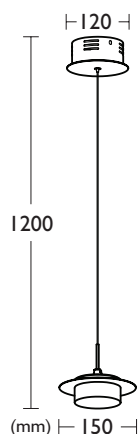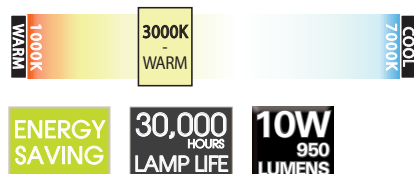

LED-P0106A

WEIGHT / LIFE

Fitting	800g
LED Lamp Life	30,000HR

PRODUCT FEATURES

- Single round light LED pendant
- Round clear acrylic diffuser with frosted inner finish attached to chrome plate
- Chrome plated canopy with inbuilt LED driver and adjustable wires



PRODUCT SPECIFICATIONS

ELECTRICAL

Supply Voltage	100-240V AC
Supply Frequency	50-60Hz
Supply Current	0.1A
Power Factor	0.5
Total Input Power	12W
Secondary Output Voltage	12V Max
Secondary Output Current	840mA
Lamp Power	10W

MATERIALS

Body	Steel
Lens / Diffuser	Acrylic
Canopy	Chrome

THERMAL

Thermal Protection	Fully protected
Ambient Temperature Rating	45°C
Maximum Surface Temp	85°C

OPTICAL / PHOTOMETRIC

Luminous Flux	950 lumens
CRI	80
Colour Temperature	3000K
Beam Angle	150°



REFERENCE	COLOUR	CODE
LED-P0106A	Chrome	27080

Pendant





A Member of the Gerard Lighting Group

Lighting the way since 1887



Customer Service/Sales

Tel: 1300 799 300 Fax: 1300 789 300

www.crompton.com.au

NEW SOUTH WALES

96-112 Gow Street
Padstow NSW 2211

VICTORIA

85 Munster Terrace
North Melbourne
VIC 3051

QUEENSLAND

3B/172 Evans Rd
Salisbury
QLD 4107

WESTERN AUSTRALIA

77 Truganina Rd
Malaga
WA 6090

SOUTH AUSTRALIA

101 Port Wakefield Rd
Cavan
SA 5094

NEW ZEALAND

Level 1, Building B, 8 Nugent Street, Grafton 1023, Auckland
TEL: +64 (0) 9 623 9646 FAX: +64 (0) 9 623 9640
Email: crompton@gerardlighting.co.nz