


LED CATALOGUE 2012/13



Crompton
Lighting



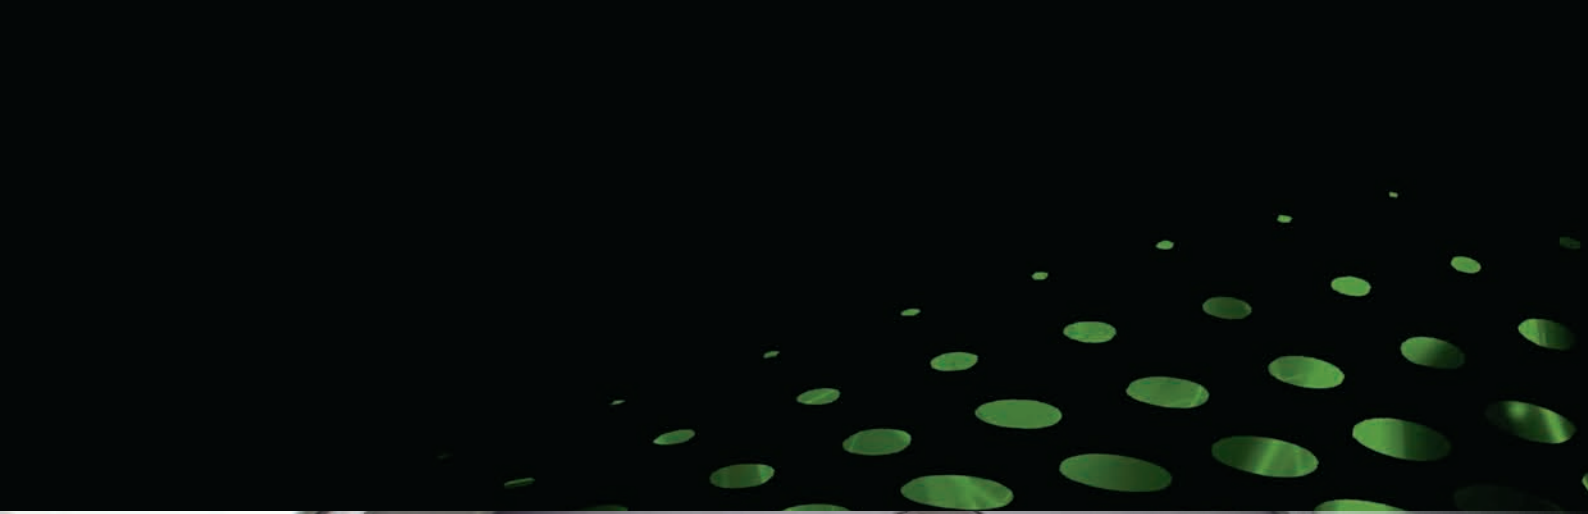

Exterior / Landscape

XL-LED Performance Exterior wall Lights	68
LED Exterior Wall Lights & Ceiling Mounted Downlights	76
LED Landscape Lighting	97
LED Exterior Bricklight Kits	98
LED Exterior Path Lights	101
LED 'WALK-OVER' Inground Uplights	102
LED Inground Garden Spotlights	104
LED Deck Light Kits	106
LED Bollard	108
LED Bollard Kit	113



The LED Technology

XL-LED Exterior Lighting

Crompton Lighting brings to market a wide range of energy saving cost effective exterior lighting solutions incorporating the latest in LED design and technology.

For many years, exterior designers have been restricted with traditional fixtures incorporating older lamp technologies, due to the restrictions on the luminaire manufacturer to accommodate factors such as heat dissipation and size of traditional light sources.

The Crompton LED Exterior range combines the latest technology with aesthetically pleasing luminaire designs, to offer an unequalled experience and product offer.

Utilizing LED chips and control systems from leading international manufacturers, Crompton Lighting creates endless opportunities to extend the living experience from indoor to outdoor, whilst ensuring only quality components and materials are used for longevity and actual luminaire performance.


A full range of luminaires in various shapes and designs are available, as well as different wattages, to meet the needs of differing desired effects for the highlighting or enhancement of any exterior area.



XL-LED Performance Exterior Bunker / Wall Light



PRODUCT SPECIFICATIONS

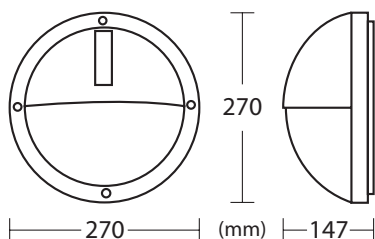

XL-EX649



ELECTRICAL

Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.15A
Power Factor	0.9
Total Input Power	22W
Secondary Output Voltage	24V DC
Secondary Output Current	0.7A
Lamp Power	20W

MATERIALS

Body	Dry powder coated die-cast aluminium
Diffuser	UV stabilised polycarbonate
Controller Base & Cover	Thermoplastic

THERMAL

Thermal Protection	Fully protected
Ingress Protection Rating	IP65

OPTICAL / PHOTOMETRIC

Luminous Flux	1100 lumens
CRI	80
Colour Temperature	3000K

WEIGHT / LIFE

Fitting	2.35Kg
LED Lamp Life	50,000HR

PRODUCT FEATURES

- XL-LED Performance Bunker / Wall Light
- Matt finish dry powder coated die-cast aluminium base with heat sink
- UV stabilized opal polycarbonate diffuser
- 20W integral LED module
- Dimmable with most trailing edge dimmers



REFERENCE	COLOUR	CODE
XL-EX649W	White	26849
XL-EX649G	Graphite	26850


XL-LED Performance Exterior Round Wall Light



\$AVE
ENERGY

LAMP
LIFE
25,000

3W
300
LUMENS



Projection: 90 (mm)

EXLED1865



PRODUCT FEATURES

- XL-LED Performance Exterior Wall Light
- 3 x 1W LED exterior wall light
- Black powder coated die-cast aluminium body and base
- Clear polycarbonate diffuser
- Internally mounted driver and 3 x 1W LED's on the base



PRODUCT SPECIFICATIONS

ELECTRICAL

Supply Voltage	100-240V AC
Supply Frequency	50-60Hz
Supply Current	0.06A
Power Factor	0.6
Total Input Power	3W
Secondary Output Voltage	0.5V - 10V DC
Secondary Output Current	350mA
Lamp Power	3 x 1W

MATERIALS

Body	Powder coated die-cast aluminium
Diffuser	Polycarbonate

THERMAL


Ingress Protection Rating	IP44
---------------------------	------

OPTICAL / PHOTOMETRIC

Luminous Flux	300 lumens
CRI	75
Colour Temperature	4100K



WEIGHT / LIFE

Fitting	550g
LED Lamp Life	25,000HR

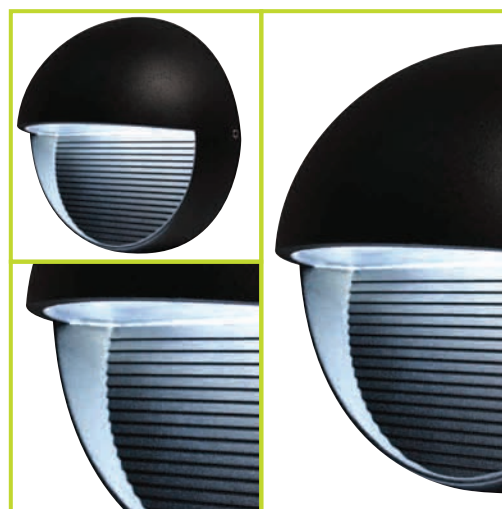

REFERENCE	COLOUR	CODE
EXLED1865	Black	26823

XL-LED Performance Exterior Square Wall Light




EXLED1866



PRODUCT FEATURES

XL-LED Performance Exterior Wall Light

- 3 x 1W LED exterior wall light
- Black square powder coated die-cast aluminium body and base
- Clear polycarbonate diffuser
- Internally mounted driver and 3 x 1W LED's on the base

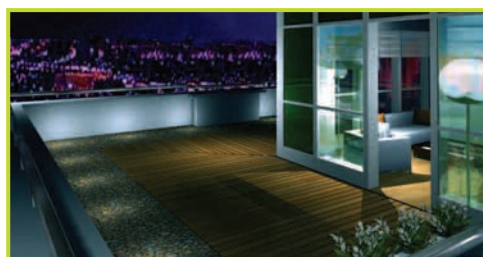

PRODUCT SPECIFICATIONS

ELECTRICAL

Supply Voltage	100-240Vac
Supply Frequency	50-60Hz
Supply Current	0.06A
Power Factor	0.6
Total Input Power	3W
Secondary Output Voltage	0.5V - 10V DC
Secondary Output Current	350mA
Lamp Power	3 x 1W

MATERIALS

Body	Powder coated die-cast aluminium
Diffuser	Polycarbonate

THERMAL


Ingress Protection Rating	IP44
---------------------------	------

OPTICAL / PHOTOMETRIC

Luminous Flux	300 lumens
CRI	75
Colour Temperature	4100K


WEIGHT / LIFE

Fitting	550g
LED Lamp Life	25,000HR

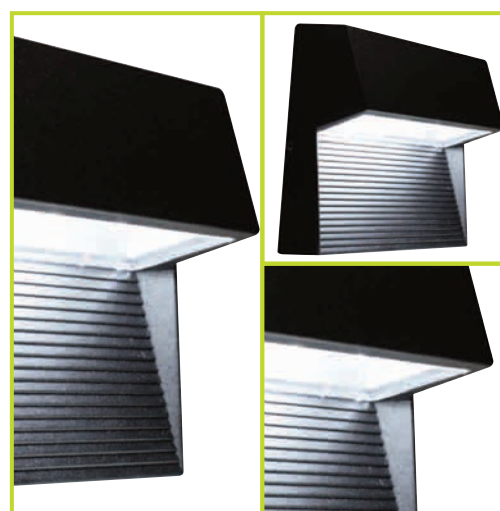

REFERENCE	COLOUR	CODE
EXLED1866	Black	26824

XL-LED Performance Exterior Round Wall Light



EX862R



PRODUCT FEATURES

- 10 X 0.12W 6000K LED exterior wall light
- Clear round shape glass
- Round satin chrome plate
- Clear round base with 10 LED's
- Built in driver

* Compared to a 15W incandescent wall light



PRODUCT SPECIFICATIONS

ELECTRICAL

Supply Voltage	230-240V AC
Supply Frequency	50-60Hz
Supply Current	10mA
Power Factor	0.6
Total Input Power	1.2W
Secondary Output Voltage	12V DC
Secondary Output Current	100mA
Lamp Power	10 x 0.12W

MATERIALS

Body	Glass, satin chrome
Diffuser	Polycarbonate

THERMAL

Ingress Protection Rating	IP44
---------------------------	------

OPTICAL / PHOTOMETRIC

Luminous Flux	40 lumens
CRI	75
Colour Temperature	6000K


WEIGHT / LIFE

Fitting	575g
LED Lamp Life	30,000HR



REFERENCE	COLOUR	CODE
EX862R	Clear	26883

XL-LED Performance Exterior Square Wall Light



Depth: 50
Glass Thickness: 10 (mm)


EX862S



PRODUCT FEATURES

- 10 X 0.12W 6000K LED exterior wall light
- Clear square shape glass
- Round satin chrome plate
- Clear round base with 10 LED's
- Built in driver

* Compared to a 15W incandescent wall light

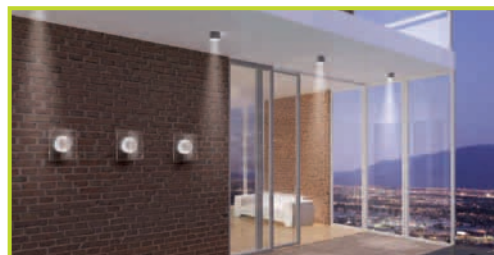

PRODUCT SPECIFICATIONS

ELECTRICAL

Supply Voltage	230-240V AC
Supply Frequency	50-60Hz
Supply Current	10mA
Power Factor	0.6
Total Input Power	1.2W
Secondary Output Voltage	12V DC
Secondary Output Current	100mA
Lamp Power	10 x 0.12W

MATERIALS

Body	Glass, satin chrome
Diffuser	Polycarbonate

THERMAL

Ingress Protection Rating	IP44
---------------------------	------

OPTICAL / PHOTOMETRIC

Luminous Flux	40 lumens
CRI	75
Colour Temperature	6000K


WEIGHT / LIFE

Fitting	575g
LED Lamp Life	30,000HR



REFERENCE	COLOUR	CODE
EX862S	Clear	26884

XL-LED Performance Exterior Wall Light



EX2381/I



PRODUCT FEATURES

- 6W XL-LED Performance exterior wall light
- Powder coated die-cast aluminium rectangular body and square base
- Tempered clear glass diffuser
- Silicon rubber gasket
- Built in driver
- 6 x 1W LED's



PRODUCT SPECIFICATIONS

ELECTRICAL

Supply Voltage	230-240V AC
Supply Frequency	50-60Hz
Supply Current	0.04A
Power Factor	0.5
Total Input Power	9.6W
Secondary Output Voltage	21V maximum
Secondary Output Current	350mA
Lamp Power	6 x 1W

MATERIALS

Body	Aluminium
Diffuser	Glass

THERMAL


Ingress Protection Rating	IP44
---------------------------	------

OPTICAL / PHOTOMETRIC

Luminous Flux	384 lumens
CRI	80
Colour Temperature	3000K


WEIGHT / LIFE

Fitting	1.36Kg
LED Lamp Life	30,000HR

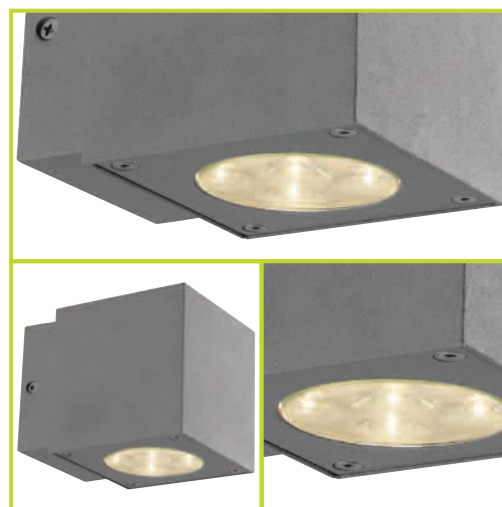

REFERENCE	COLOUR	CODE
EX2381/I	Silver	26954

XL-LED Performance Exterior Up/Down Wall Light



EX2381/2



PRODUCT FEATURES

- 12W XL-LED Performance exterior up/down wall light
- Powder coated die-cast aluminium rectangular body and square base
- Tempered clear glass diffusers
- Silicon rubber gaskets
- Built in driver
- 6 x 1W LED's in each diffuser



PRODUCT SPECIFICATIONS

ELECTRICAL

Supply Voltage	230-240V AC
Supply Frequency	50-60Hz
Supply Current	0.08A
Power Factor	0.5
Total Input Power	19.8W
Secondary Output Voltage	42V maximum
Secondary Output Current	350mA
Lamp Power	12 x 1W

MATERIALS

Body	Aluminium
Diffuser	Glass

THERMAL

Ingress Protection Rating	IP44
---------------------------	------

OPTICAL / PHOTOMETRIC

Luminous Flux	705 lumens
CRI	78
Colour Temperature	3000K

WEIGHT / LIFE

Fitting	1.94Kg
LED Lamp Life	30,000HR



REFERENCE	COLOUR	CODE
EX2381/2	Silver	26913



XL-LED PERFORMANCE

Exterior / Landscape

LED Exterior Wall Light



PRODUCT SPECIFICATIONS

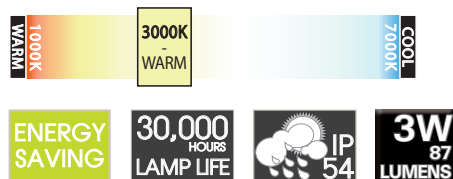

EX5671



WEIGHT / LIFE

Fitting	720g
LED Lamp Life	30,000 HR
Controller Life	30,000 HR

ELECTRICAL

Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.035A
Power Factor	0.6
Total Input Power	4.2W
Secondary Output Voltage	11V
Lamp Power	3 x 1W

MATERIALS

Body	Aluminium
Diffuser	Glass

THERMAL


Thermal Protection	135°C, fully protected
Ambient Temperature Rating	40°C
Maximum Surface Temp	75°C
Ingress Protection Rating	IP54

OPTICAL / PHOTOMETRIC

Luminous Flux	87 lumens
CRI	75-80
Colour Temperature	3000K
Beam Angle	120°



PRODUCT FEATURES

- 3W CREE LED exterior wall light
- Powder coated die-cast aluminium body and base
- Frosted glass diffuser
- Silicon rubber gasket
- Weather resistant IP54
- Inbuilt driver for direct connection to 240V supply
- 3 x 1W LED's

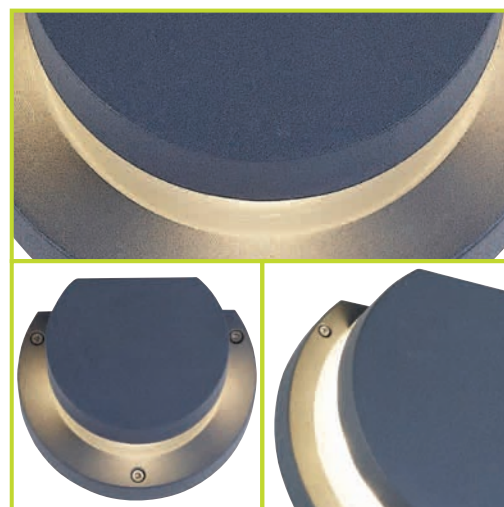

REFERENCE	COLOUR	CODE
EX5671	Graphite	27039

LED Exterior Up/Down Wall Light

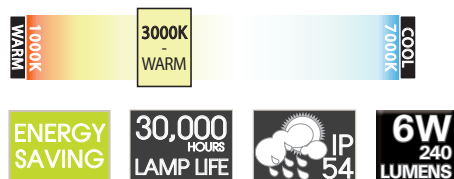

Projection: 63

EX2551



WEIGHT / LIFE

Fitting	450g
LED Lamp Life	30,000 HR
Controller Life	30,000 HR

PRODUCT SPECIFICATIONS

ELECTRICAL

Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.061A
Power Factor	0.6
Total Input Power	6.7W
Secondary Output Voltage	12V
Lamp Power	2 x 3W

MATERIALS

Body	Aluminium
Diffuser	Glass

THERMAL

Thermal Protection	135°C, fully protected
Ambient Temperature Rating	40°C
Maximum Surface Temp	75°C
Ingress Protection Rating	IP54

OPTICAL / PHOTOMETRIC

Luminous Flux	240 lumens
CRI	75-80
Colour Temperature	3000K
Beam Angle	Top: 35°, Bottom: 82°

PRODUCT FEATURES



- 6W exterior up/down wall light
- Powder coated die-cast aluminium body and base
- Tempered clear glass diffuser
- Silicon rubber gasket
- Inbuilt driver for direct connection to 240V supply
- 2 x 3W LED's



REFERENCE	COLOUR	CODE
EX2551	Graphite	27036

Exterior /
Landscape

LED Exterior Wall Light

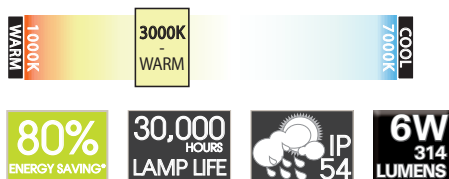

EX2611



WEIGHT / LIFE

Fitting	910g
LED Lamp Life	30,000 HR
Controller Life	30,000 HR

PRODUCT SPECIFICATIONS

ELECTRICAL

Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.06A
Power Factor	0.6
Total Input Power	6.9W
Secondary Output Voltage	12V
Lamp Power	2 x 3W

MATERIALS

Body	Aluminium
Diffuser	Glass

THERMAL

Thermal Protection	135°C, fully protected
Ambient Temperature Rating	40°C
Maximum Surface Temp	75°C
Ingress Protection Rating	IP54


OPTICAL / PHOTOMETRIC

Luminous Flux	314 lumens
CRI	75-80
Colour Temperature	3000K
Beam Angle	92°

PRODUCT FEATURES

- 6W CREE LED exterior wall light
- Powder coated die-cast aluminium rectangular body and square base
- Clear glass diffuser
- Silicon rubber gasket
- Weather resistant IP54
- Inbuilt driver for direct connection to 240V supply
- 2 x 3W LED's

* Compared to a standard 11W GU10 CFL lamp


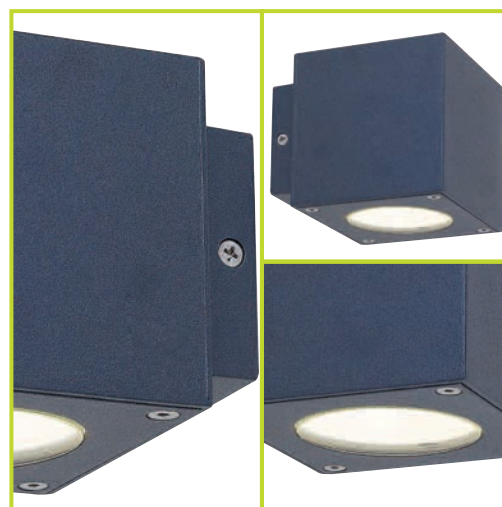


REFERENCE	COLOUR	CODE
EX2611	Graphite	27041

LED Exterior Up/Down Wall Light



PRODUCT SPECIFICATIONS

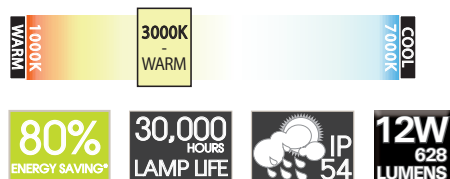

EX254I-LED



WEIGHT / LIFE

Fitting	1.51Kg
LED Lamp Life	30,000 HR
Controller Life	30,000 HR

ELECTRICAL

Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.126A
Power Factor	0.6
Total Input Power	15.6W
Secondary Output Voltage	42V
Lamp Power	12 x 1W

MATERIALS

Body	Aluminium
Diffuser	Glass

THERMAL

Thermal Protection	135°C, fully protected
Ambient Temperature Rating	40°C
Maximum Surface Temp	75°C
Ingress Protection Rating	IP54


OPTICAL / PHOTOMETRIC

Luminous Flux	628 lumens
CRI	75-80
Colour Temperature	3000K
Beam Angle	40°

PRODUCT FEATURES

- 12W LED exterior up/down wall light
- Powder coated die-cast aluminium rectangular body
- Tempered clear glass diffusers
- Silicon rubber gasket
- Inbuilt driver for direct connection to 240V supply
- 6 x 1W LED's in each diffuser



* Compared to a standard 11W GU10 CFL lamp

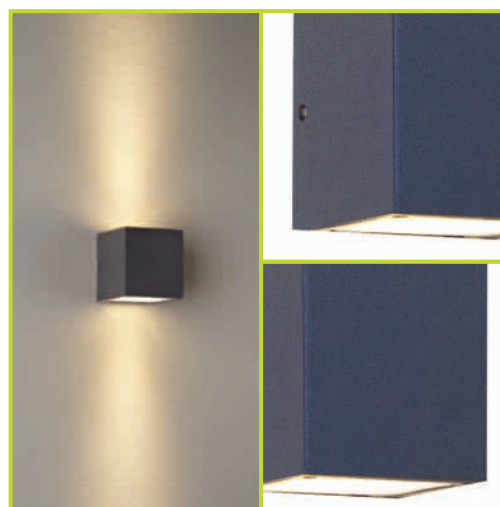

REFERENCE	COLOUR	CODE
EX254I-LED	Graphite	27048

Exterior /
Landscape

LED Exterior Wall Light

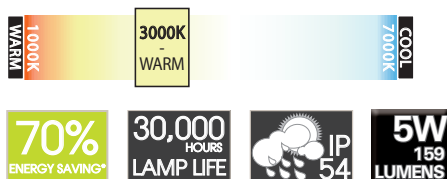

EX2622



WEIGHT / LIFE

Fitting	530g
LED Lamp Life	30,000 HR
Controller Life	30,000 HR

PRODUCT FEATURES

- 5W LED exterior wall light
- Powder coated die-cast aluminium rectangular body
- Clear glass diffuser
- Silicon rubber gasket
- Weather resistant IP54
- Inbuilt driver for direct connection to 240V supply
- 1 x 5W LED

* Compared to a standard 7W GU10 CFL lamp



PRODUCT SPECIFICATIONS

ELECTRICAL

Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.051A
Power Factor	0.6
Total Input Power	5W
Secondary Output Voltage	24V
Lamp Power	1 x 5W

MATERIALS


Body	Aluminium
Diffuser	Glass

THERMAL

Thermal Protection	135°C, fully protected
Ambient Temperature Rating	40°C
Maximum Surface Temp	75°C
Ingress Protection Rating	IP54

OPTICAL / PHOTOMETRIC

Luminous Flux	159 lumens
CRI	75-80
Colour Temperature	3000K
Beam Angle	56°


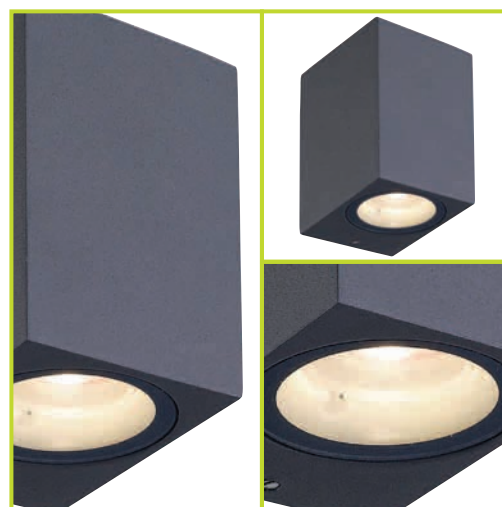


REFERENCE	COLOUR	CODE
EX2622	Graphite	27038

LED Exterior Up/Down Wall Light



PRODUCT SPECIFICATIONS

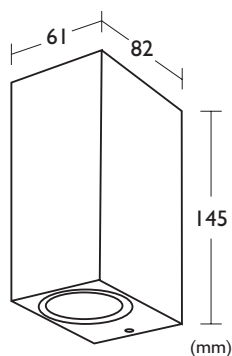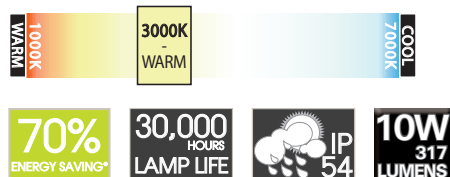

EX262I



WEIGHT / LIFE

Fitting	770g
LED Lamp Life	30,000 HR
Controller Life	30,000 HR

ELECTRICAL

Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.091A
Power Factor	0.6
Total Input Power	10.8W
Secondary Output Voltage	42V
Lamp Power	2 x 5W

MATERIALS

Body	Aluminium
Diffuser	Glass

THERMAL

Thermal Protection	135°C, fully protected
Ambient Temperature Rating	40°C
Maximum Surface Temp	75°C
Ingress Protection Rating	IP54

OPTICAL / PHOTOMETRIC

Luminous Flux	317 lumens
CRI	75-80
Colour Temperature	3000K
Beam Angle	56°

PRODUCT FEATURES

- 10W LED exterior up/down wall light
- Powder coated die-cast aluminium rectangular body
- Clear glass diffusers
- Silicon rubber gasket
- Weather resistant IP54
- Inbuilt driver for direct connection to 240V supply
- 1 x 5W LED in each diffuser

* Compared to a standard 7W GU10 CFL lamp





REFERENCE	COLOUR	CODE
EX262I	Graphite	27037

Exterior /
Landscape

LED Exterior Wall Light



PRODUCT SPECIFICATIONS

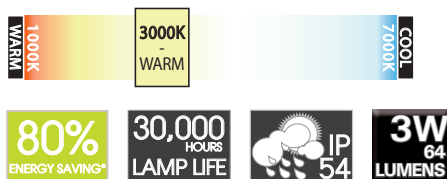

EX2562



WEIGHT / LIFE

Fitting	260g
LED Lamp Life	30,000 HR
Controller Life	30,000 HR

ELECTRICAL

Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.033A
Power Factor	0.6
Total Input Power	3.8W
Secondary Output Voltage	4V
Lamp Power	1 x 3W

MATERIALS

Body	Aluminium
Diffuser	Glass

THERMAL

Thermal Protection	135°C, fully protected
Ambient Temperature Rating	40°C
Maximum Surface Temp	75°C
Ingress Protection Rating	IP54


OPTICAL / PHOTOMETRIC

Luminous Flux	64 lumens
CRI	75-80
Colour Temperature	3000K
Beam Angle	75°

PRODUCT FEATURES

- 3W CREE LED exterior wall light
- Powder coated die-cast aluminium rectangular body
- Tempered clear glass diffuser
- Silicon rubber gasket
- Inbuilt driver for direct connection to 240V supply
- 1 x 3W LED

* Compared to a standard 7W GU10 CFL lamp


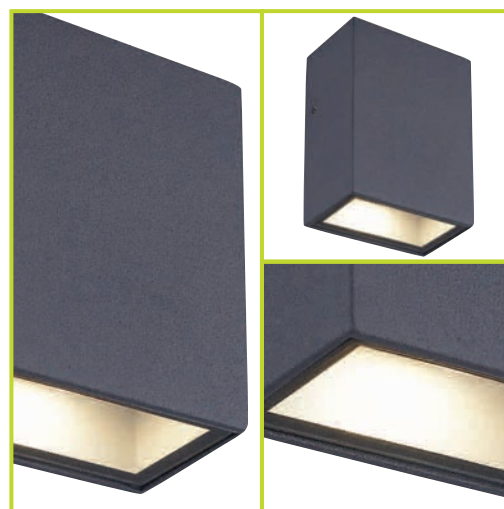


REFERENCE	COLOUR	CODE
EX2562	Graphite	27043

LED Exterior Up/Down Wall Light



PRODUCT SPECIFICATIONS

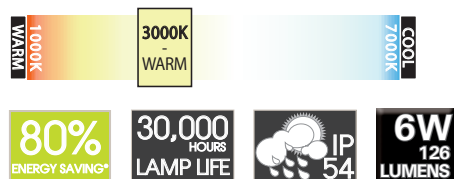

EX2561



WEIGHT / LIFE

Fitting	600g
LED Lamp Life	30,000 HR
Controller Life	30,000 HR

ELECTRICAL

Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.06A
Power Factor	0.6
Total Input Power	6.9W
Secondary Output Voltage	12V
Lamp Power	2 x 3W

MATERIALS

Body	Aluminium
Diffuser	Glass

THERMAL

Thermal Protection	135°C, fully protected
Ambient Temperature Rating	40°C
Maximum Surface Temp	75°C
Ingress Protection Rating	IP54

OPTICAL / PHOTOMETRIC

Luminous Flux	126 lumens
CRI	75-80
Colour Temperature	3000K
Beam Angle	55°

PRODUCT FEATURES

- 6W CREE LED exterior up/down wall light
- Powder coated die-cast aluminium rectangular body
- Tempered clear glass diffusers
- Silicon rubber gasket
- Inbuilt driver for direct connection to 240V supply
- 1 x 3W LED in each diffuser



* Compared to a standard 7W GU10 CFL lamp



REFERENCE	COLOUR	CODE
EX2561	Graphite	27042

Exterior /
Landscape

LED Exterior Wall Light

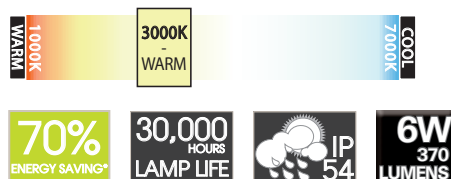

EX2232



WEIGHT / LIFE

Fitting	980g
LED Lamp Life	30,000 HR
Controller Life	30,000 HR

PRODUCT FEATURES

- 6W LED exterior wall light
- Powder coated die-cast aluminium cylindrical body and round base
- Tempered clear glass diffuser
- Silicon rubber gasket
- Inbuilt driver for direct connection to 240V supply
- 6 x 1W LED's

* Compared to a standard 18W GU10 CFL lamp



PRODUCT SPECIFICATIONS

ELECTRICAL

Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.07A
Power Factor	0.6
Total Input Power	7.7W
Secondary Output Voltage	24V
Lamp Power	6 x 1W

MATERIALS

Body	Aluminium
Diffuser	Glass

THERMAL

Thermal Protection	135°C, fully protected
Ambient Temperature Rating	40°C
Maximum Surface Temp	75°C
Ingress Protection Rating	IP54

OPTICAL / PHOTOMETRIC

Luminous Flux	370 lumens
CRI	75-80
Colour Temperature	3000K
Beam Angle	10°





REFERENCE	COLOUR	CODE
EX2232	Graphite	27045

LED Exterior Up/Down Wall Light



PRODUCT SPECIFICATIONS

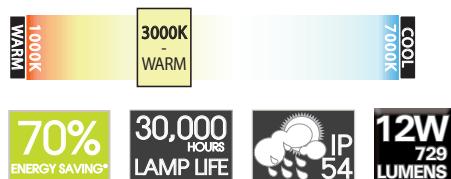

EX223 I



WEIGHT / LIFE

Fitting	1.43Kg
LED Lamp Life	30,000 HR
Controller Life	30,000 HR

ELECTRICAL

Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.134A
Power Factor	0.6
Total Input Power	16.7W
Secondary Output Voltage	42V
Lamp Power	12 x 1W

MATERIALS

Body	Aluminium
Diffuser	Glass

THERMAL

Thermal Protection	135°C, fully protected
Ambient Temperature Rating	40°C
Maximum Surface Temp	75°C
Ingress Protection Rating	IP54


OPTICAL / PHOTOMETRIC

Luminous Flux	729 lumens
CRI	75-80
Colour Temperature	3000K
Beam Angle	10°

PRODUCT FEATURES

- 12W LED exterior up/down wall light
- Powder coated die-cast aluminium cylindrical body and round base
- Tempered clear glass diffusers
- Silicon rubber gasket
- Inbuilt driver for direct connection to 240V supply
- 6 x 1W LED's in each diffuser

* Compared to a standard 18W GU10 CFL lamp

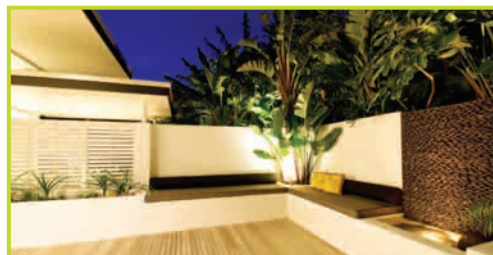



REFERENCE	COLOUR	CODE
EX223 I	Graphite	27044

Exterior /
Landscape

LED Exterior Ceiling Mounted Downlight



PRODUCT SPECIFICATIONS

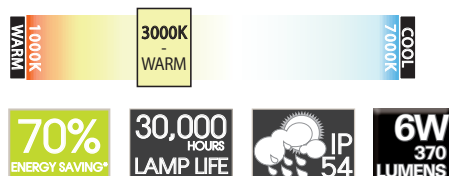

EX2235N



WEIGHT / LIFE

Fitting	750g
LED Lamp Life	30,000 HR
Controller Life	30,000 HR

ELECTRICAL

Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.07A
Power Factor	0.6
Total Input Power	7.7W
Secondary Output Voltage	24V
Lamp Power	6 x 1W

MATERIALS

Body	Aluminium
Diffuser	Glass

THERMAL

Thermal Protection	135°C, fully protected
Ambient Temperature Rating	40°C
Maximum Surface Temp	75°C
Ingress Protection Rating	IP54


OPTICAL / PHOTOMETRIC

Luminous Flux	370 lumens
CRI	75-80
Colour Temperature	3000K
Beam Angle	10°

PRODUCT FEATURES

- 6W LED exterior ceiling mounted downlight
- Powder coated die-cast aluminium cylindrical body
- Tempered clear glass diffuser
- Silicon rubber gasket
- Inbuilt driver for direct connection to 240V supply
- 6 x 1W LED's

* Compared to a standard 18W GU10 CFL lamp


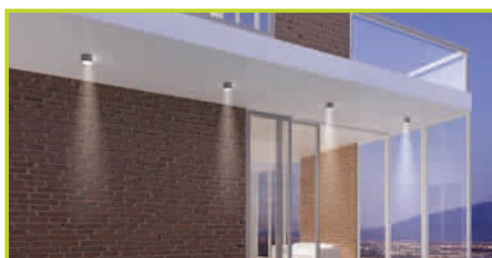


REFERENCE	COLOUR	CODE
EX2235N	Graphite	27046

LED Exterior Ceiling Mounted Downlight



PRODUCT SPECIFICATIONS

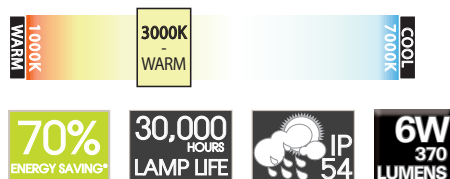

EX2385



WEIGHT / LIFE

Fitting	800g
LED Lamp Life	30,000 HR
Controller Life	30,000 HR

ELECTRICAL

Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.07A
Power Factor	0.6
Total Input Power	7.7W
Secondary Output Voltage	24V
Lamp Power	6 x 1W

MATERIALS

Body	Aluminium
Diffuser	Glass

THERMAL

Thermal Protection	135°C, fully protected
Ambient Temperature Rating	40°C
Maximum Surface Temp	75°C
Ingress Protection Rating	IP54



OPTICAL / PHOTOMETRIC

Luminous Flux	370 lumens
CRI	75-80
Colour Temperature	3000K
Beam Angle	10°

PRODUCT FEATURES

- 6W LED exterior ceiling mounted downlight
- Powder coated die-cast aluminium rectangular body
- Tempered clear glass diffuser
- Silicon rubber gasket
- Inbuilt driver for direct connection to 240V supply
- 6 x 1W LED's

* Compared to a standard 18W GU10 CFL lamp

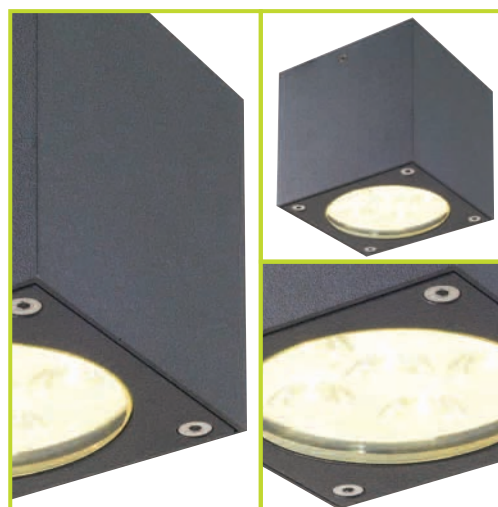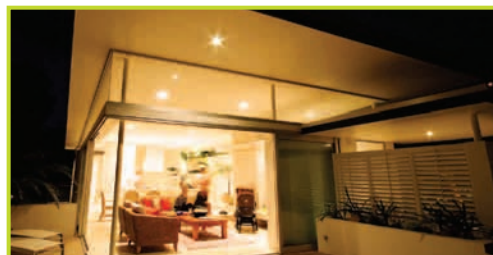


REFERENCE	COLOUR	CODE
EX2385	Graphite	27047

Exterior /
Landscape


LED Circular / Square Exterior Wall Light



EX4181



EX4182



PRODUCT SPECIFICATIONS

ELECTRICAL

Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.01A
Power Factor	0.6
Total Input Power	1.4W
Secondary Output Voltage	6V
Secondary Output Current	200mA
Lamp Power	14 x 0.1W

MATERIALS

Body	Aluminium die-cast housing, thermoplastic mounting enclosure
Diffuser	Polycarbonate

THERMAL

Ambient Temperature Rating	25°C Nominal
Maximum Surface Temp	45°C Nominal
Ingress Protection Rating	IP65

OPTICAL / PHOTOMETRIC



Luminous Flux	56 lumens
CRI	>85
Colour Temperature	5500K - 6000K

WEIGHT / LIFE

Fitting	350g
LED Lamp Life	20,000HR

PRODUCT FEATURES

- Energy saving LED circular / square wall light
- Aluminium die-cast housing
- Matt black powder coated finish
- Tapered thermoplastic mounting enclosure
- Clear diffuser
- Inbuilt driver for direct connection to 240V supply
- IP65
- 14 x 0.1W white LED's

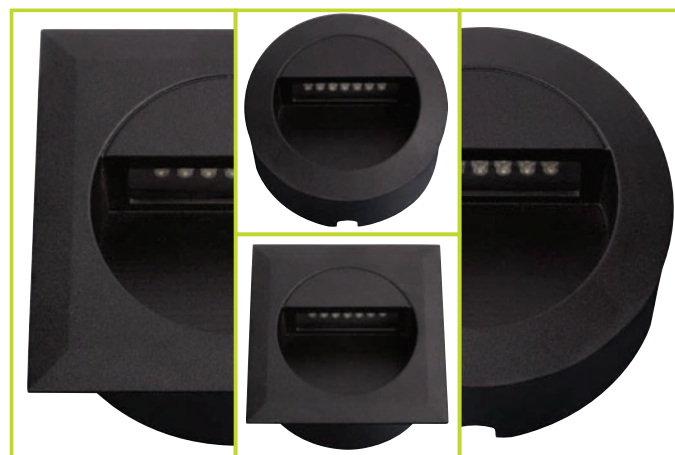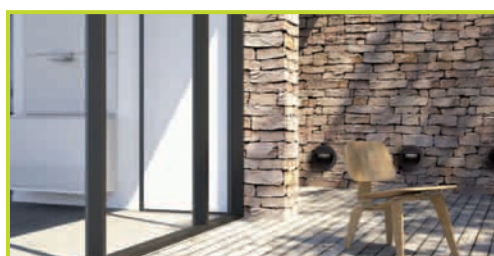


REFERENCE	SHAPE	COLOUR	CODE
EX4181	Circular	Black	25624
EX4182	Square	Black	25625


LED Mini Circular / Square Exterior Wall Light



PRODUCT SPECIFICATIONS

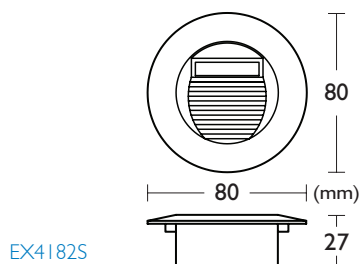

EX4182S



EX4181S

WEIGHT / LIFE

Fitting	89g
LED Lamp Life	50,000HR

ELECTRICAL

Supply Voltage	240V AC
Supply Frequency	50-60Hz
Supply Current	50mA
Power Factor	0.28
Total Input Power	1.5W
Secondary Output Voltage	19.5V
Secondary Output Current	46mA
Lamp Power	6 x 0.2W

MATERIALS

Body	Aluminium
Diffuser	Polycarbonate

THERMAL


Protection	Overload
Ambient Temperature Rating	25°C
Maximum Surface Temp	< 45°C
Ingress Protection Rating	IP44

OPTICAL / PHOTOMETRIC

Luminous Flux	70 lumens
CRI	60
Colour Temperature	3000K
Beam Angle	120°

PRODUCT FEATURES


- Mini LED circular / square wall light
- Aluminium die-cast housing
- Matt grey / matt white powder coated finish
- Tapered thermoplastic mounting enclosure
- Clear diffuser
- Inbuilt driver for direct connection to 240V supply
- 6 x 0.2W LED's

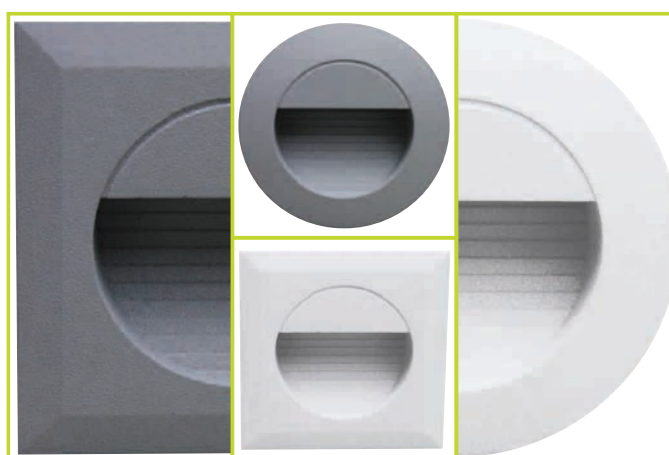

REFERENCE	SHAPE	COLOUR	CODE
EX4182SW	Circular	Matt White	27125
EX4181SW	Square	Matt White	27126
EX4182SG	Circular	Matt Grey	27127
EX4181SG	Square	Matt Grey	27128

Exterior /
Landscape

LED Exterior Wall Light

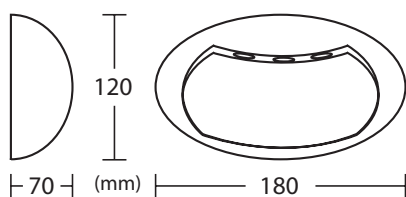


EX1860



PRODUCT FEATURES

- LED wall light
- Silver powder coated die-cast aluminium body and cover
- Clear polycarbonate lens
- Built in driver
- IP44
- 3 x 1W 4100K white LED's

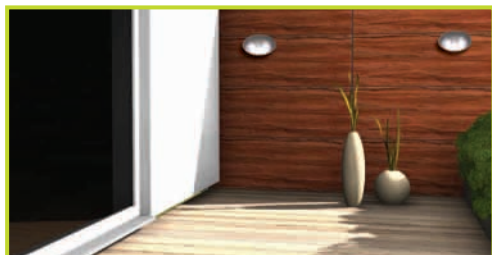

PRODUCT SPECIFICATIONS

ELECTRICAL

Supply Voltage	100-240V AC
Supply Frequency	50-60Hz
Supply Current	0.06A
Power Factor	0.6
Total Input Power	3W
Secondary Output Voltage	0.5V - 10V DC
Secondary Output Current	350mA
Lamp Power	3 x 1W

MATERIALS

Body	Aluminium
Diffuser	Polycarbonate

THERMAL

Ambient Temperature Rating	50°C
Maximum Surface Temp	75°C
Ingress Protection Rating	IP44

OPTICAL / PHOTOMETRIC

Luminous Flux	120 lumens
CRI	>85
Colour Temperature	4100K


WEIGHT / LIFE

Fitting	550g
LED Lamp Life	20,000HR



REFERENCE	COLOUR	CODE
EX1860	Silver	26404

LED Exterior Wall Light



EX2571S



PRODUCT SPECIFICATIONS

ELECTRICAL

Supply Voltage	230-240V AC
Supply Frequency	50-60Hz
Supply Current	0.06A
Power Factor	0.5
Total Input Power	12W
Secondary Output Voltage	12V
Secondary Output Current	0.5A
Lamp Power	2 x 3W

MATERIALS

Body	Aluminium
Diffuser	Glass

THERMAL

Ambient Temperature Rating	25°C
Maximum Surface Temp	45°C
Ingress Protection Rating	IP44

OPTICAL / PHOTOMETRIC



Luminous Flux	223 lumens
CRI	77
Colour Temperature	3000K

WEIGHT / LIFE

Fitting	450g
LED Lamp Life	30,000HR

PRODUCT FEATURES



- Round powder coated die-cast aluminium body and base
- Tempered clear glass lens
- Silicon rubber gaskets
- Built in driver
- IP44
- 2 x 3W LED's

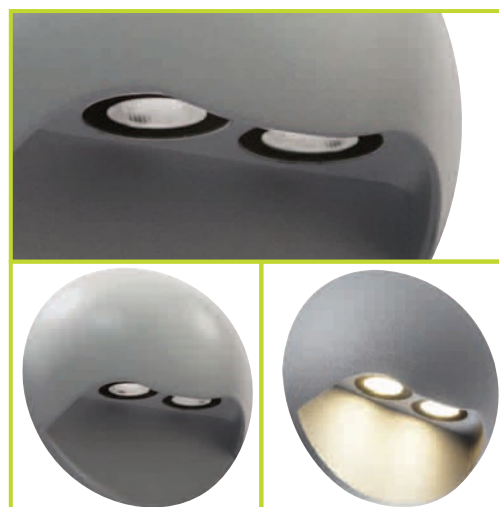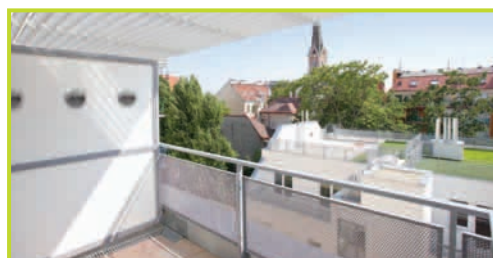

REFERENCE	COLOUR	CODE
EX2571S	Silver	26951

Exterior /
Landscape

LED Exterior Up/Down Wall Light

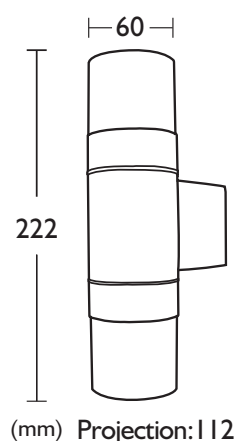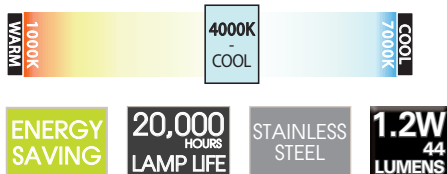

EXST581



PRODUCT SPECIFICATIONS

ELECTRICAL

Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.01A
Power Factor	0.6
Total Input Power	1.2W in each diffuser
Lamp Power	12 x 0.1W in each difuser
Input Capacitance of Driver	4.7nF

MATERIALS

Body	Stainless Steel
Diffuser	Glass

THERMAL

Ambient Temperature Rating	25°C Nominal
Maximum Surface Temp	45°C Nominal
Ingress Protection Rating	IP44

OPTICAL / PHOTOMETRIC

Luminous Flux	44 lumens
CRI	>85
Colour Temperature	4000K

WEIGHT / LIFE

Fitting	1.25Kg
LED Lamp Life	20,000HR



PRODUCT FEATURES

- LED up/down wall light
- Stainless steel housing and base
- Glass diffusers
- Integral LED driver for direct connection to 240V supply
- IP44
- 12 x 0.1W white LED's in each diffuser
- Matching garden bollard available (code 25643)



REFERENCE	COLOUR	CODE
EXST581	Stainless Steel	25641

LED Exterior Wall Light

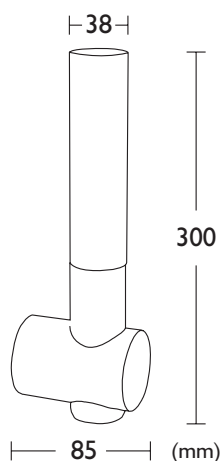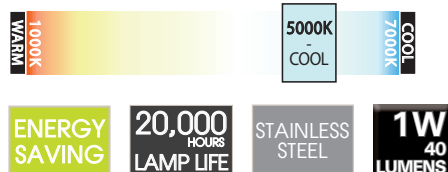

EX801 I

PRODUCT SPECIFICATIONS

ELECTRICAL	
Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	20mA
Power Factor	0.6
Total Input Power	1W
Lamp Power	1W
Input Capacitance of Driver	4.7nF

MATERIALS	
Body	304 stainless Steel
Diffuser	Frosted acrylic

THERMAL	
Ambient Temperature Rating	25°C Nominal
Maximum Surface Temp	45°C Nominal
Ingress Protection Rating	IP44

OPTICAL / PHOTOMETRIC	
Luminous Flux	40 lumens
CRI	> 70
Colour Temperature	5000K

WEIGHT / LIFE	
Fitting	480g
LED Lamp Life	20,000HR

PRODUCT FEATURES

- LED wall light
- 304 grade stainless steel construction
- Frosted acrylic diffuser
- Inbuilt driver for direct connection to 240V supply
- IP44
- 1W white LED
- Matching garden bollard available (code 25312)





REFERENCE	COLOUR	CODE
EX801 I	Stainless Steel	25589

Exterior /
Landscape

LED Exterior Up/Down Wall Light



PRODUCT SPECIFICATIONS

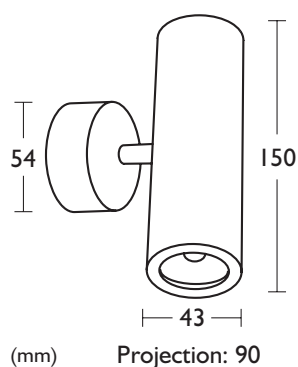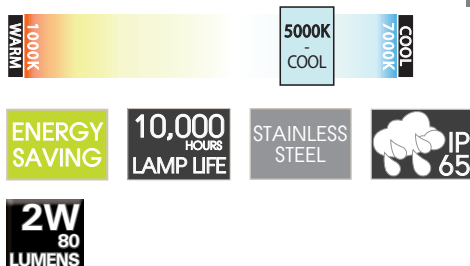

EXST4001

ELECTRICAL

Supply Voltage	85-240V AC
Supply Frequency	50-60Hz
Supply Current	20mA
Power Factor	0.6
Total Input Power	2W
Lamp Power	2 x 1W
Input Capacitance of Driver	4.7nF

MATERIALS

Body	Stainless Steel
Diffuser	Toughened glass

THERMAL

Ambient Temperature Rating	25°C Nominal
Maximum Surface Temp	45°C Nominal
Ingress Protection Rating	IP65

OPTICAL / PHOTOMETRIC

Luminous Flux	80 lumens
CRI	> 70
Colour Temperature	5000K

WEIGHT / LIFE

Fitting	1.125Kg
LED Lamp Life	10,000HR



PRODUCT FEATURES

- LED up/down wall light
- Stainless steel construction
- Toughened glass diffusers
- Inbuilt driver for direct connection to 240V supply
- IP65
- 2 x 1W white LED's



REFERENCE	COLOUR	CODE
EXST4001	Stainless Steel	25318

LED Exterior Wall Light

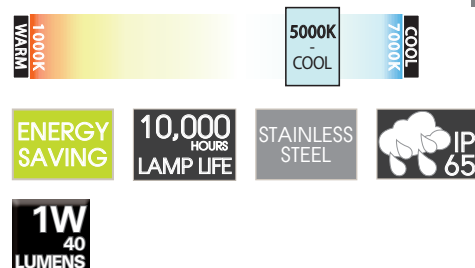

EXST4002

PRODUCT SPECIFICATIONS

ELECTRICAL

Supply Voltage	85-240V AC
Supply Frequency	50-60Hz
Supply Current	20mA
Power Factor	0.6
Total Input Power	1W
Lamp Power	1W
Input Capacitance of Driver	4.7nF

MATERIALS

Body	Stainless Steel
Diffuser	Toughened glass

THERMAL

Ambient Temperature Rating	25°C Nominal
Maximum Surface Temp	45°C Nominal
Ingress Protection Rating	IP65

OPTICAL / PHOTOMETRIC

Luminous Flux	40 lumens
CRI	> 70
Colour Temperature	5000K

WEIGHT / LIFE

Fitting	560g
LED Lamp Life	10,000HR

PRODUCT FEATURES

- LED wall light
- Stainless steel construction
- Toughened glass diffuser
- Inbuilt driver for direct connection to 240V supply
- IP65
- 1W white LED





REFERENCE	COLOUR	CODE
EXST4002	Stainless Steel	25319

Exterior /
Landscape

LED Exterior Adjustable Wall Light



PRODUCT SPECIFICATIONS

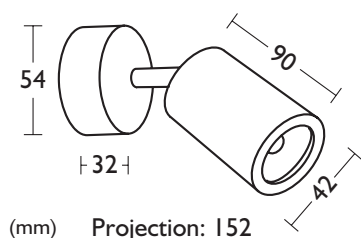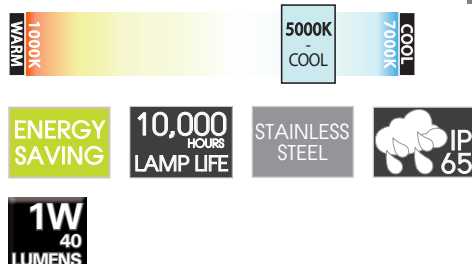

EXST4003

ELECTRICAL

Supply Voltage	85-240V AC
Supply Frequency	50-60Hz
Supply Current	20mA
Power Factor	0.6
Total Input Power	1W
Lamp Power	1W
Input Capacitance of Driver	4.7nF

MATERIALS

Body	Stainless Steel
Diffuser	Toughened glass

THERMAL

Ambient Temperature Rating	25°C Nominal
Maximum Surface Temp	45°C Nominal
Ingress Protection Rating	IP65

OPTICAL / PHOTOMETRIC

Luminous Flux	40 lumens
CRI	> 70
Colour Temperature	5000K

WEIGHT / LIFE

Fitting	572g
LED Lamp Life	10,000HR

PRODUCT FEATURES

- LED adjustable wall light
- Stainless steel construction
- Toughened glass diffuser
- Inbuilt driver for direct connection to 240V supply
- IP65
- 1W white LED



REFERENCE	COLOUR	CODE
EXST4003	Stainless Steel	25320



The LED Technology

Crompton LED Landscape Lighting

Crompton Lighting brings to market a wide range of energy saving cost effective exterior landscape lighting solutions incorporating the latest in LED design and technology.

For many years , landscapers have been limited with traditional fixtures incorporating older lamp technologies, due to the restrictions on the luminaire manufacturer to accommodate factors such as heat dissipation and size of traditional light sources.



The Crompton LED Landscape Lighting range combines the latest technology with both traditional and contemporary luminaire designs, to offer a modern range of energy efficient, cost effective lighting solutions.

Utilizing LED chips and control systems from leading international manufacturers, Crompton Lighting creates endless opportunities to extend the living experience from indoor to outdoor, whilst ensuring only quality components and materials are used for longevity and actual luminaire performance.

A full range of luminaires in various shapes and designs are available, as well as different wattages, to meet the needs of differing desired effects for the highlighting or enhancement of the exterior area.



LED Bricklight Kit

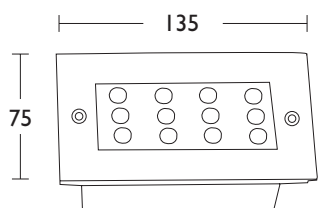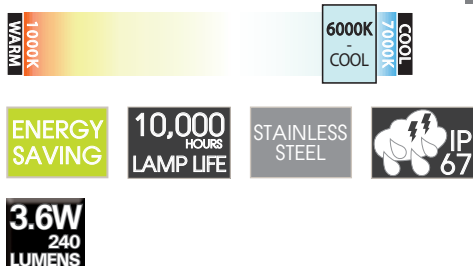

Cut-out: 65 x 123 (mm)

EXST4081K

WEIGHT / LIFE

Fitting	2.8Kg
LED Lamp Life	10,000HR

PRODUCT FEATURES

- LED low voltage bricklight kit
- 3 stainless steel bricklights with glass diffuser
- Low voltage cable with connectors
- 10VA IP44 driver with flex and plug
- IP67
- 12 x 0.1W white LED's in each bricklight



PRODUCT SPECIFICATIONS

ELECTRICAL

Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.025A
Power Factor	0.45
Total Input Power	1.2W
Secondary Output Voltage	12V
Secondary Output Current	300mA
Lamp Power	12 x 0.1W each

MATERIALS

Body	316 stainless steel
Diffuser	Glass

THERMAL

Ambient Temperature Rating	25°C
Maximum Surface Temp	45°C
Ingress Protection Rating	IP67


OPTICAL / PHOTOMETRIC

Luminous Flux	80 lumens each
CRI	> 70
Colour Temperature	6000K



REFERENCE	COLOUR	CODE
EXST4081K	316 Stainless Steel	25314

LED Bricklight Kit



EX803 IK

WEIGHT / LIFE

Fitting	2.8Kg
LED Lamp Life	10,000HR

PRODUCT FEATURES

- LED low voltage bricklight kit
- 3 x 1.8W square frosted glass bricklights
- IP67
- 10 metres of 4 core low voltage cable
- 10VA LED converter IP44



PRODUCT SPECIFICATIONS

ELECTRICAL

Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.06A
Power Factor	0.45
Total Input Power	5.4W
Secondary Output Voltage	12V
Secondary Output Current	300mA
Lamp Power	3 x 1.8W

MATERIALS

Body	Glass
------	-------

THERMAL

Ambient Temperature Rating	25°C
Maximum Surface Temp	45°C
Ingress Protection Rating	IP67

OPTICAL / PHOTOMETRIC



Luminous Flux	40 lumens each
CRI	> 70
Colour Temperature	6000K



REFERENCE	COLOUR	CODE
EX803 IK	White	25315

Exterior /
Landscape

LED Bricklight

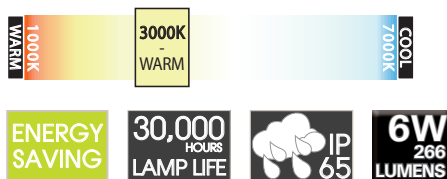

EX2583




WEIGHT / LIFE

Fitting	810g
LED Lamp Life	30,000 HR
Controller Life	30,000 HR

PRODUCT FEATURES

- 6W CREE LED exterior bricklight
- Powder coated die-cast aluminium body
- Tempered clear glass diffusers
- Silicon rubber gasket
- Inbuilt driver for direct connection to 240V supply
- 6 x 1W LED's

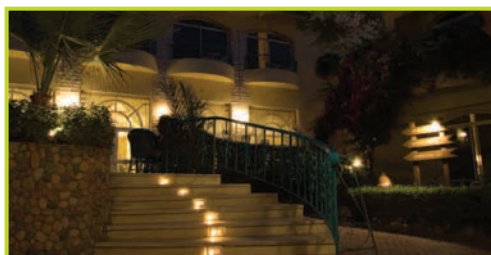

PRODUCT SPECIFICATIONS

ELECTRICAL

Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.072A
Power Factor	0.6
Total Input Power	8.3W
Secondary Output Voltage	24V
Lamp Power	6 x 1W

MATERIALS


Body	Aluminium
Diffuser	Glass

THERMAL

Thermal Protection	135°C, fully protected
Ambient Temperature Rating	40°C
Maximum Surface Temp	75°C
Ingress Protection Rating	IP65

OPTICAL / PHOTOMETRIC

Luminous Flux	266 lumens
CRI	75-80
Colour Temperature	3000K
Beam Angle	60°

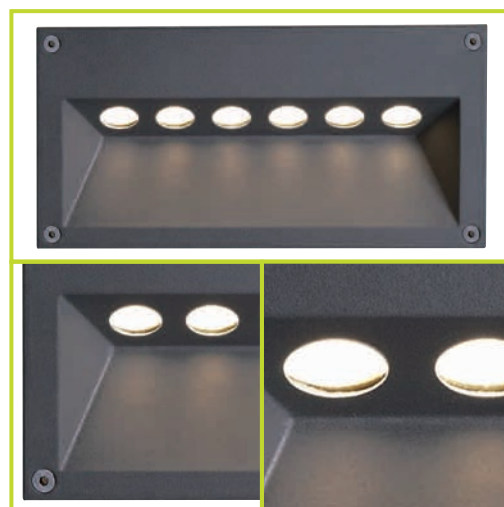



REFERENCE	COLOUR	CODE
EX2583	Graphite	27049

Exterior /
Landscape

LED Path Light



PRODUCT SPECIFICATIONS

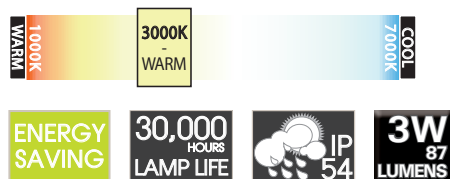

EX5673 | 138 | (mm) | 108 |



WEIGHT / LIFE

Fitting	1.02Kg
LED Lamp Life	30,000 HR
Controller Life	30,000 HR

ELECTRICAL

Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.035A
Power Factor	0.6
Total Input Power	4.2W
Secondary Output Voltage	11V
Lamp Power	3 x 1W

MATERIALS

Body	Aluminium
Diffuser	Glass

THERMAL

Thermal Protection	135°C, fully protected
Ambient Temperature Rating	40°C
Maximum Surface Temp	75°C
Ingress Protection Rating	IP54

OPTICAL / PHOTOMETRIC

Luminous Flux	87 lumens
CRI	75-80
Colour Temperature	3000K
Beam Angle	120°

PRODUCT FEATURES

- 3W CREE LED exterior path light
- Powder coated die-cast aluminium body
- Frosted glass diffuser
- Silicon rubber gasket
- Inbuilt driver for direct connection to 240V supply
- 3 x 1W LED's





REFERENCE	COLOUR	CODE
EX5673	Graphite	27040

Exterior /
Landscape

LED Round 'WALK-OVER' Inground Uplight



PRODUCT SPECIFICATIONS

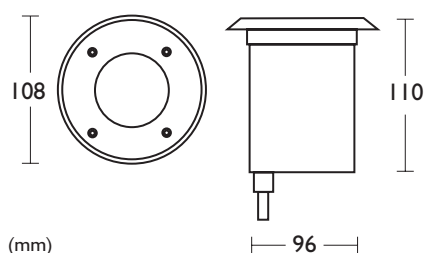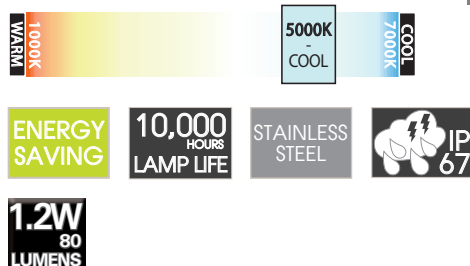

EXST5025

WEIGHT / LIFE

Fitting	700g
LED Lamp Life	10,000HR

PRODUCT FEATURES

- 1.2W LED round 'Walk-Over' inground uplight
- Die-cast aluminium body, powder coated with a pre-treatment for outdoor use
- External housing of thermoplastic material for direct burial is supplied with the fitting
- 6mm thick 316 grade stainless steel rim
- 8mm thick heat tempered safety glass diffuser
- Silicone rubber gasket
- PGI nickel plated brass cable gland (allows for through wiring)
- IP67
- Includes 1.2W/12V 12 diode LED array: bluish colour

For DIY installation require LED driver and cable.
(See page 136 & 137)



ELECTRICAL

Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.025A
Power Factor	0.45
Total Input Power	1.2W
Secondary Output Voltage	12V
Secondary Output Current	300mA
Lamp Power	12 x 0.1W

MATERIALS

Body	316 stainless steel
Diffuser	Glass

THERMAL

Ambient Temperature Rating	25°C
Maximum Surface Temp	75°C
Ingress Protection Rating	IP67

OPTICAL / PHOTOMETRIC

Luminous Flux	80 lumens
CRI	> 70
Colour Temperature	5000K





REFERENCE	COLOUR	CODE
EXST5025	316 Stainless Steel	24916

LED Square 'WALK-OVER' Inground Uplight



PRODUCT SPECIFICATIONS

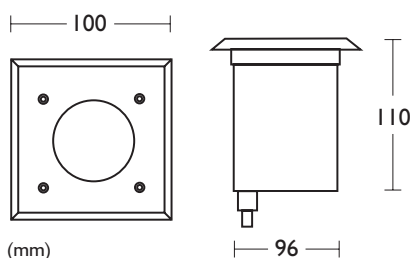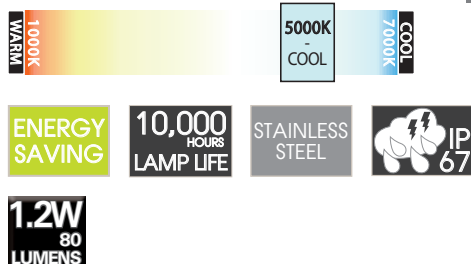

EXST5026

WEIGHT / LIFE

Fitting	750g
LED Lamp Life	10,000HR

ELECTRICAL

Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.025A
Power Factor	0.45
Total Input Power	1.2W
Secondary Output Voltage	12V
Secondary Output Current	300mA
Lamp Power	12 x 0.1W

MATERIALS

Body	316 stainless steel
Diffuser	Glass

THERMAL

Ambient Temperature Rating	25°C
Maximum Surface Temp	75°C
Ingress Protection Rating	IP67

OPTICAL / PHOTOMETRIC

Luminous Flux	80 lumens
CRI	>70
Colour Temperature	5000K

PRODUCT FEATURES

- 1.2W LED square 'Walk-Over' inground uplight
- Die-cast aluminium body, powder coated with a pre-treatment for outdoor use
- External housing of thermoplastic material for direct burial is supplied with the fitting
- 6mm thick 316 grade stainless steel trim
- 8mm thick heat tempered safety glass diffuser
- Silicone rubber gasket
- PG11 nickel plated brass cable gland (allows for through wiring)
- IP67
- Includes 1.2W/12V 12 diode LED array: bluish colour

For DIY installation require LED driver and cable.
(See page 136 & 137)





REFERENCE	COLOUR	CODE
EXST5026	316 Stainless Steel	24917

Exterior /
Landscape

LED Inground Garden Spotlight



PRODUCT SPECIFICATIONS

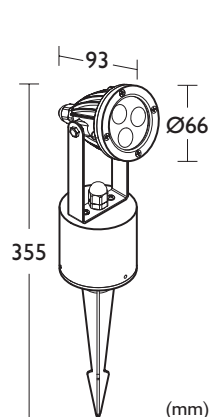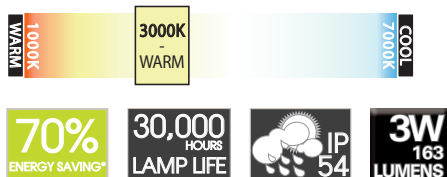

EX2201



WEIGHT / LIFE

Fitting	490g
LED Lamp Life	30,000 HR
Controller Life	30,000 HR

PRODUCT FEATURES

- 3W LED inground garden spotlight
- Powder coated die-cast aluminium construction
- Clear polycarbonate diffuser
- Adjustable head and inground spike
- Silicon rubber gasket
- Inbuilt driver for direct connection to 240V supply
- Weather resistant IP54
- 3 x 1W LED's

* Compared to a standard 35W MR16 lamp



ELECTRICAL

Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.044A
Power Factor	0.6
Total Input Power	4.1W
Secondary Output Voltage	11V
Lamp Power	3 x 1W

MATERIALS

Body	Aluminium
Diffuser	Polycarbonate

THERMAL

Thermal Protection	135°C, fully protected
Ambient Temperature Rating	40°C
Maximum Surface Temp	75°C
Ingress Protection Rating	IP54



OPTICAL / PHOTOMETRIC

Luminous Flux	163 lumens
CRI	75-80
Colour Temperature	3000K
Beam Angle	25°



REFERENCE	COLOUR	CODE
EX2201	Graphite	27052

LED Inground Garden Spotlight

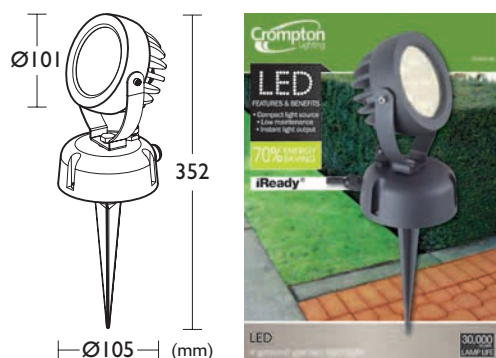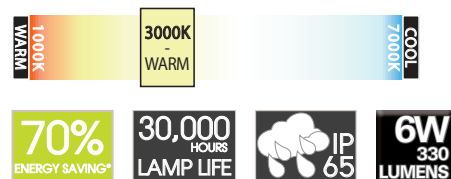

EX259I


WEIGHT / LIFE

Fitting	930g
LED Lamp Life	30,000 HR
Controller Life	30,000 HR

PRODUCT FEATURES

- 6W CREE LED inground garden spotlight
- Powder coated die-cast aluminium construction
- Tempered clear glass diffuser
- Adjustable head and inground spike
- Silicon rubber gasket
- Inbuilt driver for direct connection to 240V supply
- Weather resistant IP65
- 6 x 1W LED's

* Compared to a standard 35W MR16 lamp

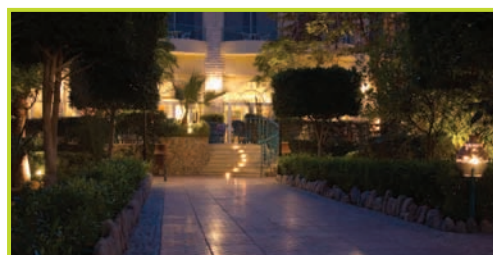

PRODUCT SPECIFICATIONS

ELECTRICAL

Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.074A
Power Factor	0.6
Total Input Power	8.6W
Secondary Output Voltage	24V
Lamp Power	6 x 1W

MATERIALS

Body	Aluminium
Diffuser	Glass

THERMAL

Thermal Protection	135°C, fully protected
Ambient Temperature Rating	40°C
Maximum Surface Temp	75°C
Ingress Protection Rating	IP65

OPTICAL / PHOTOMETRIC

Luminous Flux	330 lumens
CRI	75-80
Colour Temperature	3000K
Beam Angle	40°





REFERENCE	COLOUR	CODE
EX259I	Graphite	27053

Exterior /
Landscape

LED Round Face Deck Light



PRODUCT SPECIFICATIONS

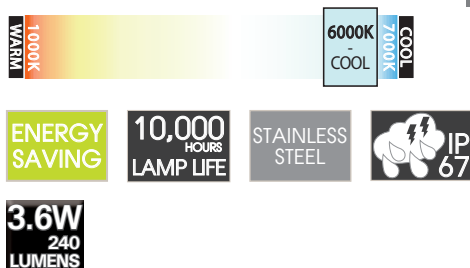


EXST4144K



PRODUCT FEATURES

- LED low voltage deck light kit
- 6 x 0.6W round face deck lights
- 304 grade stainless steel
- IP67
- 10 metres of low voltage cable
- 10VA LED converter IP44
- Replacement driver (code 85487)

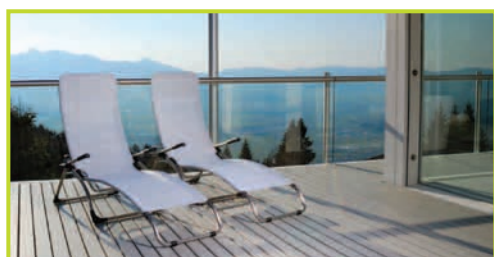

ELECTRICAL

Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.06A
Power Factor	0.45
Total Input Power	3.6W
Secondary Output Voltage	12V
Secondary Output Current	0.9A
Lamp Power	6 x 0.6W

MATERIALS

Body	304 stainless steel
Diffuser	Glass

THERMAL

Ambient Temperature Rating	25°C
Maximum Surface Temp	75°C
Ingress Protection Rating	IP67

OPTICAL / PHOTOMETRIC

Luminous Flux	40 lumens each
CRI	>70
Colour Temperature	6000K

WEIGHT / LIFE

Fitting	1900g
LED Lamp Life	10,000HR





REFERENCE	COLOUR	CODE
EXST4144K	304 Stainless Steel	25316

LED Square Face Deck Light



PRODUCT SPECIFICATIONS

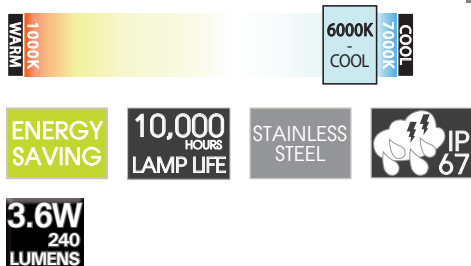


EXST4145K



PRODUCT FEATURES

- LED low voltage deck light kit
- 6 x 0.6W square face deck lights
- 304 grade stainless steel
- IP67
- 10 metres of low voltage cable
- 10VA LED converter IP44
- Replacement driver (code 85487)

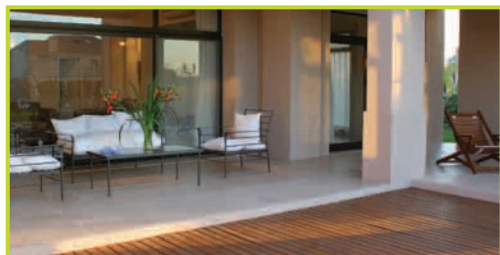

ELECTRICAL

Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.06A
Power Factor	0.45
Total Input Power	3.6W
Secondary Output Voltage	12V
Secondary Output Current	0.9A
Lamp Power	6 x 0.6W

MATERIALS

Body	304 stainless steel
Diffuser	Glass

THERMAL

Ambient Temperature Rating	25°C
Maximum Surface Temp	75°C
Ingress Protection Rating	IP67

OPTICAL / PHOTOMETRIC

Luminous Flux	40 lumens each
CRI	>70
Colour Temperature	6000K

WEIGHT / LIFE



Fitting	1900g
LED Lamp Life	10,000HR



REFERENCE	COLOUR	CODE
EXST4145K	304 Stainless Steel	25317

Exterior /
Landscape

LED Wall Light

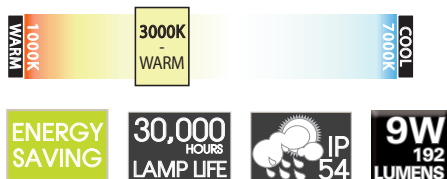


EX2491A

WEIGHT / LIFE

Fitting	910g
LED Lamp Life	30,000 HR
Controller Life	30,000 HR

PRODUCT FEATURES

- 9W LED wall light
- Powder coated die-cast aluminium body
- Frosted polycarbonate diffuser
- Silicon rubber gasket
- Inbuilt driver for direct connection to 240V supply
- 3 x 3W LED's

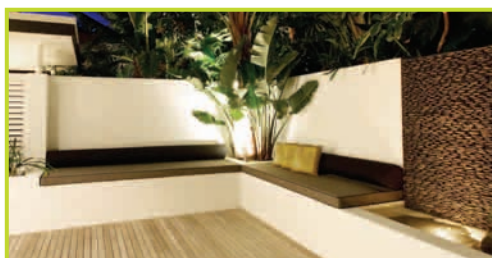

PRODUCT SPECIFICATIONS

ELECTRICAL

Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.089A
Power Factor	0.6
Total Input Power	10.1W
Secondary Output Voltage	24V
Lamp Power	3 x 3W

MATERIALS


Body	Aluminium
Diffuser	Polycarbonate

THERMAL

Thermal Protection	135°C, fully protected
Ambient Temperature Rating	40°C
Maximum Surface Temp	75°C
Ingress Protection Rating	IP54



OPTICAL / PHOTOMETRIC

Luminous Flux	192 lumens
CRI	75-80
Colour Temperature	3000K
Beam Angle	78°

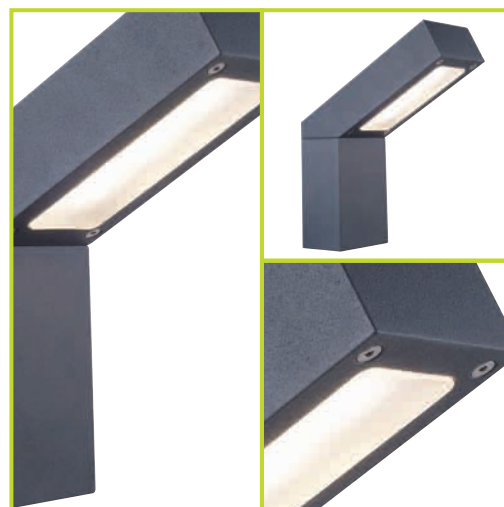

REFERENCE	COLOUR	CODE
EX2491A	Graphite	27050

LED Bollard

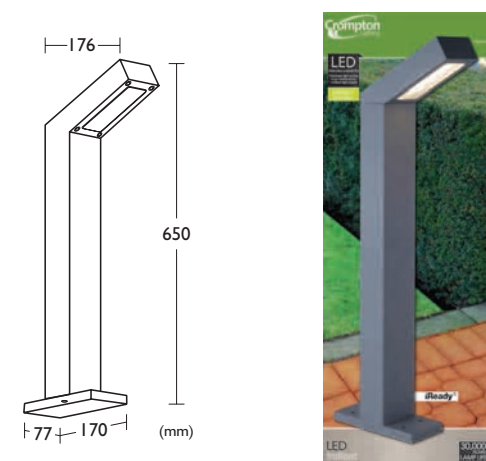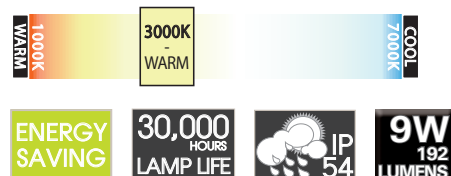

EX2493A

WEIGHT / LIFE

Fitting	1.94Kg
LED Lamp Life	30,000 HR
Controller Life	30,000 HR

PRODUCT SPECIFICATIONS

ELECTRICAL

Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.089A
Power Factor	0.6
Total Input Power	10.1W
Secondary Output Voltage	24V
Lamp Power	3 x 3W

MATERIALS

Body	Aluminium
Diffuser	Polycarbonate

THERMAL

Thermal Protection	135°C, fully protected
Ambient Temperature Rating	40°C
Maximum Surface Temp	75°C
Ingress Protection Rating	IP54

OPTICAL / PHOTOMETRIC

Luminous Flux	192 lumens
CRI	75-80
Colour Temperature	3000K
Beam Angle	78°

PRODUCT FEATURES


- 9W CREE LED bollard
- Powder coated die-cast aluminium body
- Frosted polycarbonate diffuser
- Silicon rubber gasket
- Inbuilt driver for direct connection to 240V supply
- 3 x 3W LED's



REFERENCE	COLOUR	CODE
EX2493A	Graphite	27051

Exterior /
Landscape

LED Bollard

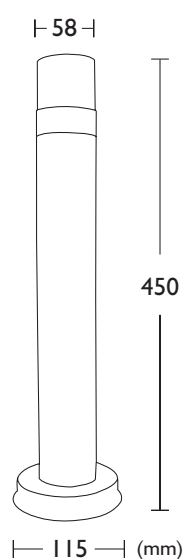

EXST583



PRODUCT SPECIFICATIONS

ELECTRICAL

Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.01A
Power Factor	0.6
Total Input Power	1.2W
Secondary Output Voltage	12V
Secondary Output Current	0.018A
Lamp Power	12 x 0.1W
Input Capacitance of Driver	4.7μF

MATERIALS

Body	Stainless steel
Lens / Diffuser	Glass

THERMAL

Ambient Temperature Rating	25°C
Maximum Surface Temp	45°C
Ingress Protection Rating	IP44

OPTICAL / PHOTOMETRIC


Luminous Flux	80 lumens
CRI	70
Colour Temperature	5500K - 6000K

WEIGHT / LIFE

Fitting	1.125Kg
LED Lamp Life	50,000 HR


PRODUCT FEATURES

- LED bollard
- Stainless steel housing
- Glass diffuser
- Integral converter for direct connection to 240V supply
- Floating terminal block in protective casing
- IP44
- 12 x 0.1W white LED's
- Matching exterior wall light available (EXST581)

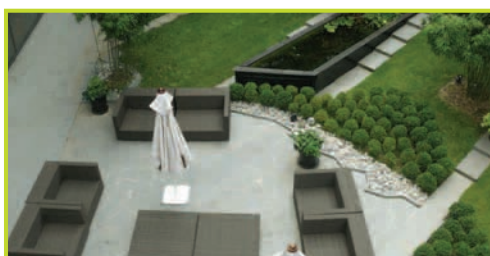

REFERENCE	COLOUR	CODE
EXST583	Stainless Steel	25643

LED Bollard

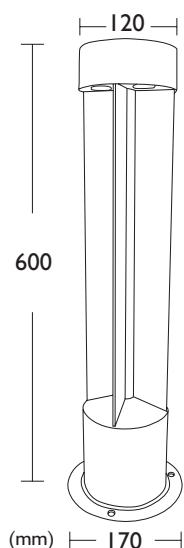

EXB2533



PRODUCT SPECIFICATIONS

ELECTRICAL

Supply Voltage	230-240V AC
Supply Frequency	50-60Hz
Supply Current	0.03A
Power Factor	0.5
Total Input Power	8W
Secondary Output Voltage	16V maximum
Secondary Output Current	350mA
Lamp Power	4 x 1W
Input Capacitance of Driver	0.033μF

MATERIALS

Body	Aluminium
Lens / Diffuser	Glass

THERMAL

Ambient Temperature Rating	40°C
Maximum Surface Temp	75°C
Ingress Protection Rating	IP44

OPTICAL / PHOTOMETRIC

Luminous Flux	145 lumens
CRI	77
Colour Temperature	3000K

WEIGHT / LIFE

Fitting	2040g
LED Lamp Life	20,000HR

PRODUCT FEATURES

- LED bollard
- Powder coated die-cast aluminium body and base
- Tempered clear glass lens
- Silicon rubber gasket
- Integral converter for direct connection to 240V supply
- IP44
- 4 x 1W LED's





REFERENCE	COLOUR	CODE
EXB2533	Silver	26953

Exterior /
Landscape



PRODUCT SPECIFICATIONS

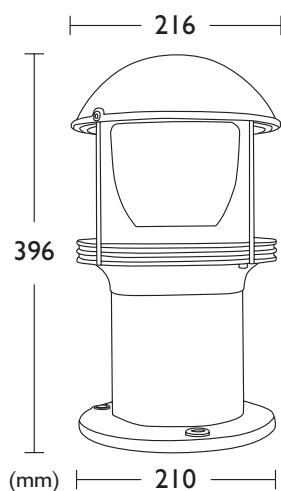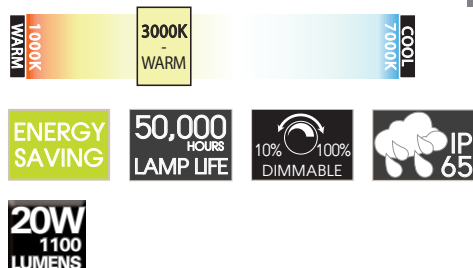

EXB614742

ELECTRICAL

Supply Voltage	230-240V AC
Supply Frequency	50-60Hz
Supply Current	0.15A
Power Factor	0.9 - 0.98
Total Input Power	20W
Secondary Output Voltage	24V DC
Secondary Output Current	700mA
Lamp Power	20W

MATERIALS

Body	Aluminium
Diffuser	Polycarbonate

THERMAL

Ambient Temperature Rating	-20°C to +45°C
Maximum Surface Temp	75°C
Ingress Protection Rating	IP65

OPTICAL / PHOTOMETRIC

Luminous Flux	1100 lumens
CRI	80
Colour Temperature	3000K

WEIGHT / LIFE

Fitting	3.2Kg
LED Lamp Life	50,000 HR

PRODUCT FEATURES

- LED garden bollard
- Matt black powder coated die-cast aluminium body
- UV stabilized white spherical polycarbonate diffuser with inbuilt Philips fortimo LED module
- IP65
- 10%-100% dimmable





REFERENCE	COLOUR	CODE
EXB614742	Matt Black	26998

LED Garden Bollard Kit



PRODUCT SPECIFICATIONS

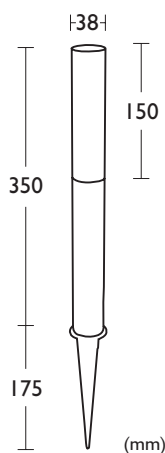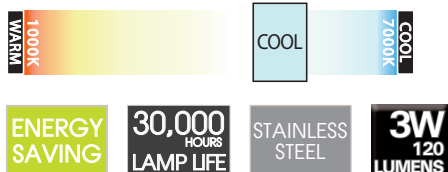


EX8012K



PRODUCT FEATURES

- LED low voltage garden bollard kit
- 3 stainless steel bollards with frosted acrylic diffusers and ground spikes
- 10 metres of 4 core low voltage cable
- 10VA LED converter
- Remote control unit to change light colour to any of the seven available colours
- 304 grade stainless steel
- IP44
- Replacement driver (code 85487)

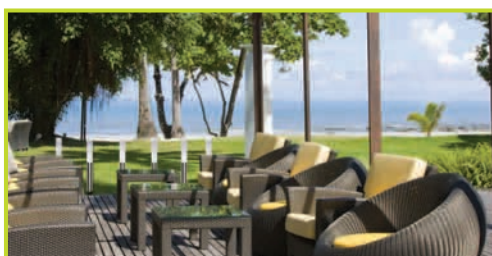

ELECTRICAL	
Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.06A
Power Factor	0.45
Total Input Power	3.6W
Secondary Output Voltage	12V
Secondary Output Current	750mA
Lamp Power	3 x 1W

MATERIALS	
Body	304 stainless steel
Diffuser	Acrylic

THERMAL	
Ambient Temperature Rating	25°C
Maximum Surface Temp	45°C
Ingress Protection Rating	IP44

OPTICAL / PHOTOMETRIC	
Luminous Flux	40 lumens each

WEIGHT / LIFE	
Fitting	3.6Kg
LED Lamp Life	10,000HR



REFERENCE	COLOUR	CODE
EX8012K	Stainless Steel	25312

Exterior /
Landscape





A Member of the Gerard Lighting Group

Lighting the way since 1887



Customer Service/Sales

Tel: 1300 799 300 Fax: 1300 789 300

www.crompton.com.au

NEW SOUTH WALES

96-112 Gow Street
Padstow NSW 2211

VICTORIA

85 Munster Terrace
North Melbourne
VIC 3051

QUEENSLAND

3B/172 Evans Rd
Salisbury
QLD 4107

WESTERN AUSTRALIA

77 Truganina Rd
Malaga
WA 6090

SOUTH AUSTRALIA

101 Port Wakefield Rd
Cavan
SA 5094

NEW ZEALAND

Level 1, Building B, 8 Nugent Street, Grafton 1023, Auckland
TEL: +64 (0) 9 623 9646 FAX: +64 (0) 9 623 9640
Email: crompton@gerardlighting.co.nz