

Residential





An exciting range of stylish and quality designed residential lighting products



Stanza
246



TR31
247



Minilux
250



Orion
252



Polo
254



Polo LED
258



Esterno
260



Julux
261



Julux LED
262



Stelle Bulkhead
264

Residential





TKB Series
265



Yarra 400
266



Force Flood Eco
268



Securipar
269



LED Sense 1
270



LED Sense 2
271



LED Sense 3
272



LED Sense 4
274



LEDTrace 2CW LEDTrace
5CW
278



LEDTrace 2 RGB / 3 RGB
280



An exciting range of stylish and quality designed residential lighting products

Stanza

Stanza glass ceiling light with acid white glass and chrome clips.



Specifications

- Decorative toughened glass diffuser in acid white finish
- Three chrome clips support the diffuser and allow for easy removal
- Metal base powder coated white for increased performance
- Low profile of only 76mm ceramic E27 lamp holder
- Stanza suitable for max 11 watt CFL/I lamps




Quick Spec

Pierlite stylish toughened glass ceiling mounted E27 rated to 11W CFL, sleek profile easy to use clip system.

Design Applications

Residential, units, stairwells, foyers, modern homes, kitchens, dining rooms, living areas, bed rooms. Areas with low ceiling heights.

Performance

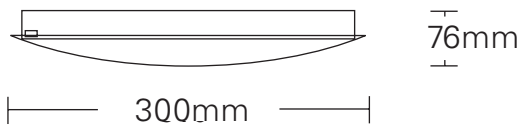

Diffuser Diameter: 300mm
Base Height: 20mm

Product Codes

Code	Version	Dim (mm)	Mass (kg)
CF602	Max 11W CFL-I less lamp	300 x 76	1.7



TR31

With its simple yet stylish appearance, The TR31 is an economical polycarbonate bulkhead with a clean lined lens.



Specifications

- Completely smooth and clean white exterior for ease of maintenance
- TR31 is the appropriate solution where aesthetics and functionality are the main considerations
- Body and diffuser made of high impact UV stabilised opal polycarbonate
- Diffuser securely snap locks onto body to provide a well sealed fit preventing the ingress of contaminants
- Provision for cable entry through opening in rear of body
- BC lamp holder for a 23 watt CFL-I lamp version
- Polycarbonate construction affords a high degree of impact and vandal resistance




Quick Spec

Pierlite UV stabilised opal polycarbonate snap lock diffuser, vandal resistant surface mounted, shallow profile, BC 23W CFL luminaire.

Design Applications

Designed for interior and exterior use out of direct weather effected areas such as stairwells, change rooms, apartment buildings, amenity facilities, hotels, clubs as well as under eaves and awnings.

Performance

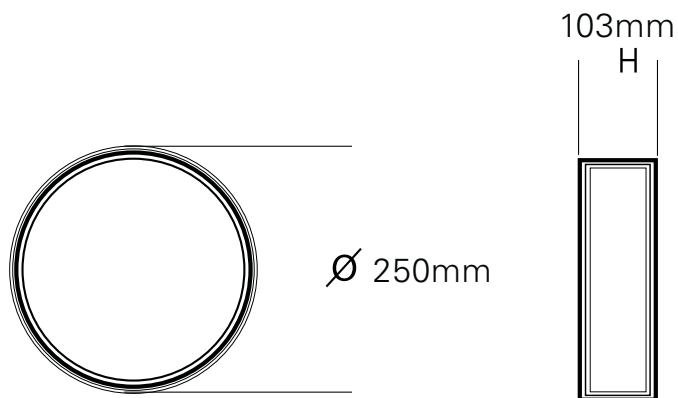

Product Codes

Code	Version	Dim (mm)	Mass (kg)
TR329	2 x 9W TC-L9W-840	250 x 103	1.4
TR31	BC L/holder 23W CFL-I	250 x 103	0.8
TR322	1 x 22W T8	250 x 103	1.5
TR322NM	1 x 22W T8 Non Maint.	250 x 103	1.5



Max Dim(mm)
250 x 103







Minilux

The Minilux is a stylish luminaire ideal for restricted spaces, such as cupboards and walk in wardrobes.



Specifications

- Lamps 8 watt T5, 13 watt T5
- One piece injection moulded white polycarbonate body and gear cover complete with lamp holder end caps
- Snap on internally frosted polycarbonate diffuser
- Standard set lengths, refer dimensions below.
- Gear cover retained by two Philips head self-cutting screws for positive fixing
- 20mm cable entry through the rear of the body
- Large 6mm- (two way) terminal block




Quick Spec

Pierlite slimline T5 8W or 13W technology, snap on diffuser, complete with optional on board switch.

Design Applications

Cupboards, Walk in wardrobes, kitchen benches.

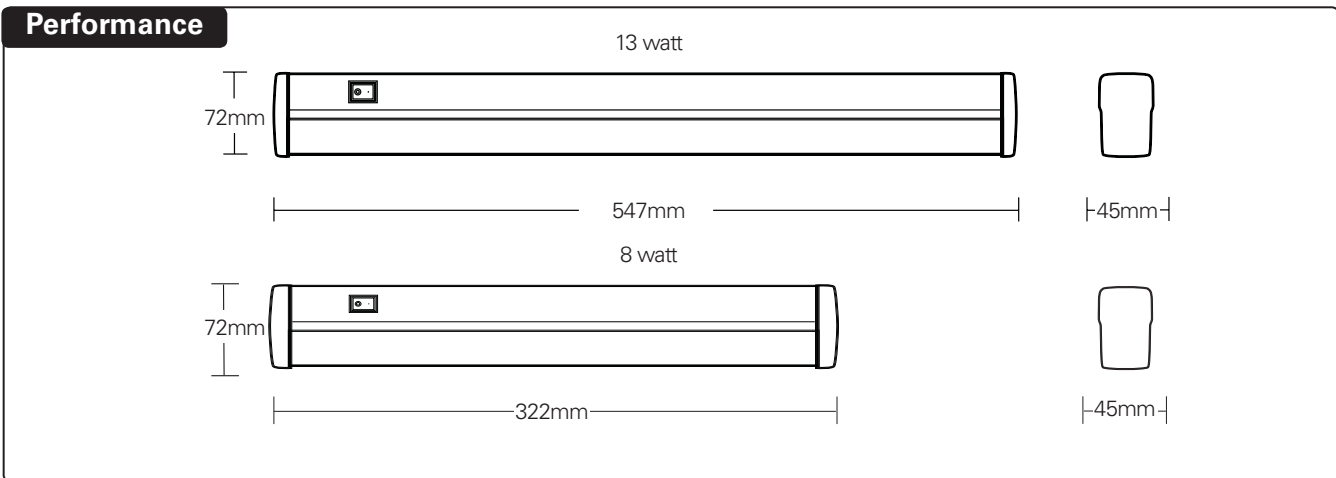

Product Codes

Code	Version	Dim (mm)	Mass (kg)
MLC113	13W T5	547 x 45 x 72	0.8
MLC113SW	13W T5	547 x 45 x 72	0.8
MLC113SWF&P	13W T5, F&P	547 x 45 x 72	0.9
MLC108	8W T5	322 x 45 x 72	0.7
MLC108SW	8W T5	322 x 45 x 72	0.7
MLC108SWF&P	8W T5, F&P	322 x 45 x 72	0.8



Electronic
Control Gear



Minilux LED

Small by design, BIG on features

Pierlite Australia introduce the new Minilux LED; streamline aluminium profile using energy efficient LED technology, which is ideal for cove or shelf illumination. Coming soon in 2012.

LED Technology

Energy efficient

For product online reference data, simply install and activate a QR code scanner application on your smartphone. For more information visit www.pierlite.com



Orion

Low profile, energy efficient T5 circular fluorescent.



Specifications

- Available in two sizes;
Orion 22 is 290mm diameter, T5 22 watt circular
Orion 40 is 395mm diameter, T5 40 watt circular
- Durable PMMA opal diffuser
- Robust metal base and control gear frame
- Energy efficient, integral electronic control gear
- Standard colour 840 lamp included
- Three (3) secure twist lock visor retaining clips for easy lamp maintenance



Quick Spec


Pierlite smooth lined circular durable PMMA opal diffuser offering T5 22W or 40W 4K complete with twist and lock retaining clips.

Design Applications

Interior, residential, commercial services, retail and health care design installations.

Performance

Orion 1 x FC 40W / 840 1 x 3200 lm

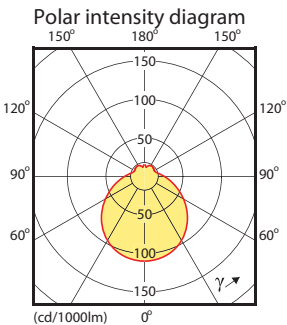

Light output ratio	0.49
Service upward	0.10
Service downward	0.39
CIE flux code	39 68 87 79 49
SHR NOM (square)	1.50
SHR MAX (square)	1.52
UGRcen (4Hx8H, 0.25H)	19

Utilisation factor table

Reflectances			Room Index								
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	24	28	32	34	38	40	42	44	45
0.70	0.30	0.20	21	24	28	30	34	37	39	42	43
0.70	0.10	0.20	18	21	25	28	31	34	36	39	41
0.50	0.50	0.20	23	26	29	31	34	36	38	40	41
0.50	0.30	0.20	19	23	26	28	32	34	36	38	40
0.50	0.10	0.20	17	20	24	26	29	32	34	36	38
0.30	0.50	0.20	21	24	27	29	31	33	35	37	38
0.30	0.30	0.20	18	21	24	26	29	31	33	35	37
0.30	0.10	0.20	16	19	22	24	27	30	31	34	35
0.00	0.00	0.00	14	17	19	21	24	26	27	29	31

Ceiling mounted

Product Codes

Code	Version	Dim (mm)	Mass (kg)
ORION22W	22W T5 4K	295 x 90	0.41
ORION40W	40W T5 4K	390 x 110	0.44



Max Dim(mm)
390 x 110





Twist lock clips for easy lamp access.



Energy efficient T5 technology. Designed with lamp and integral gear, durable PMMA opal diffuser and robust metal body housing.

Orion 22

Orion 40

Polo

Comprehensive range of IP65 Oysters utilising the latest energy efficient lamp and gear technology.



Specifications

- Available in two sizes, small 350mm diameter and large 430mm diameter
- Body made from durable ABS which houses an integral metal gear tray
- Robust opal polycarbonate diffuser
- Small version up to 1 x 22 watt T5 circular and large up to 40 watt T5 circular
- Three captive clips allowing for positive diffuser attachment, while allowing for easy lamp access
- White powder coated gear tray optimises luminaire efficiency
- Utilises energy efficient electronic control gear



Quick Spec


Pierlite robust circular 22W & 40WT5 technology, robust sleek opal polycarbonate diffuser complete with integral electronic gear.

Design Applications

Aged care facilities, nursing homes, residential and commercial.


Performance

POLO140T5E4 1 x FC 40W / 840
1 x 3200 lm

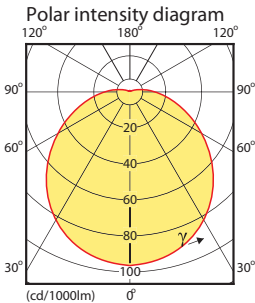

Light output ratio 0.33
Service upward 0.02
Service downward 0.31
CIE flux code 42 71 90 94 33
SHR NOM (square) 1.25
SHR MAX (square) 1.48
UGRcen (4Hx8H, 0.25H) 19

POLO122T5E4 1 x FC 22W / 840
1 x 1800 lm

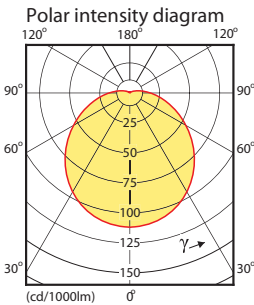

Light output ratio 0.39
Service upward 0.03
Service downward 0.36
CIE flux code 42 71 89 93 39
SHR NOM (square) 1.25
SHR MAX (square) 1.50
UGRcen (4Hx8H, 0.25H) 19

Product Codes

Code	Version	Dim (mm)	Mass (kg)
PLS122WT5E4	22W T5 EL 4K	350 x 130	1.55
PLL140WT5E4	40W T5 EL 4K	430 x 150	1.95



Integral gear



Secure IP65 clips



Polo 22W

Polo 40W

Stylish opal polycarbonate diffuser



Secure IP65 clips



Electronic
Control Gear



IP65



Sensor

Polo LED Sensor

Save power, save money



Pierlite Australia introduce the Polo LED with hidden motion sensor control. A stylish IP65 solution new for 2012.

LED Technology

Now with inbuilt sensor

For product online reference data,
simply install and activate a QR code
scanner application on your smartphone.
For more information visit
www.pierlite.com



Polo LED

Stylish range of IP65 luminaires utilising the latest energy efficient LED technology



Specifications

- Available in two sizes;
- Polo 264 is 350mm diameter
- Polo 408 is 430mm diameter
- Durable non-metallic body assembly
- Robust polycarbonate opal visor
- Three x (3) captive clips for the Polo LED 264 and four x (4) captive clips for the larger Polo LED 408 housing.
- Sturdy white powder coated metallic integral driver tray
- Long LED life, low maintenance in difficult to access areas




Quick Spec

Pierlite circular polycarbonate UV stabilised opal lens, 6500K LED technology, IP65.

Design Applications

Interior or covered residential , commercial services, health care and retail design applications.

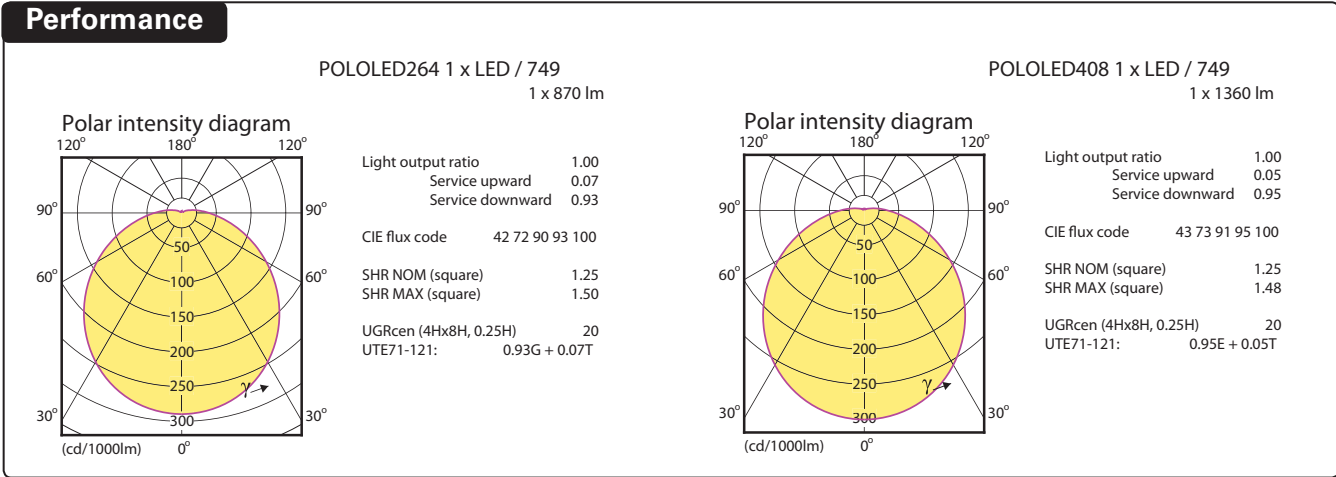



Integral gear



Secure IP65 clips

Secure IP65 clips

Stylish opal polycarbonate diffuser

Polo LED 16W

Polo LED 23W

Esterno

Esterno is a contemporary IP44 die-cast aluminium wall luminaire



Specifications

- Die cast aluminium housing
- Powder coated black ceramic E27 lamp holder
- Two versions for a variety of applications
- Suitable for exterior applications
- CFL lamps up to 23 watt




Quick Spec

Pierlite contemporary design wall mounted IP44 range in either triangular or rounded edge.

Design Applications

Balconies, porches, suitable for exterior locations.

Performance

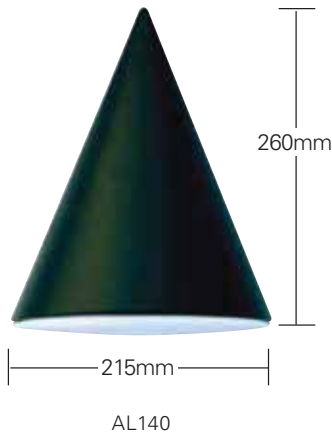

Product Codes

Code	Version	Dim (mm)	Mass (kg)
AL140	Up to 23W CFL less lamp	260 x 215 x 115	0.8
AL150	Up to 23W CFL less lamp	190 x 135 x 110	0.8



Max Dim(mm)
260 x 215 x 11



Weather resistant bulkhead for a range of applications.



Specifications

- Tough single piece polycarbonate body
- 16mm knock out cable entry
- Gasket is easily replaceable
- Single piece, clear prismatic polycarbonate lens or translucent opal lens
- Both diffusers have smooth exteriors for easy maintenance
- Supplied standard with high temperature porcelain ES lamp holder
- Fluorescent models fully wired
- All models listed below are inclusive of lamp, except JL100 and JLT100



Quick Spec

Pierlite polycarbonate, easy to install, smooth lined diffused lens, ES lamp holder bulkhead.


Design Applications

Stairwells, walkways, general security, commercial, industrial, domestic lighting, under eaves and awnings.

Product Codes

Code	Version	Dim (mm)	Mass (kg)
Julux IP44 - Clear Prismatic Diffuser			
JL126	1 x TC-D26W/840	246 x 125 x 111	1.2
JL100	ES Max 23W CFL-I	246 x 125 x 111	1.2
JL109	1 x TC-L9W/840	246 x 125 x 111	1.2
JL113	1 x TC-D13W/840	246 x 125 x 111	1.2
JL118	1 x TC-D18W/840	246 x 125 x 111	1.2
JL209	2 x TC-L9W/840	246 x 125 x 111	1.2
Translucent Opal Diffuser			
JLT100	ES Max 23W CFL-I	246 x 125 x 111	1.2
JLT109	1 x TC-L9W/840	246 x 125 x 111	1.2
JLT126	1 x TC-D26W/840	246 x 125 x 111	1.2
JLT209	2 x TC-L9W/840	246 x 125 x 111	1.2

Performance

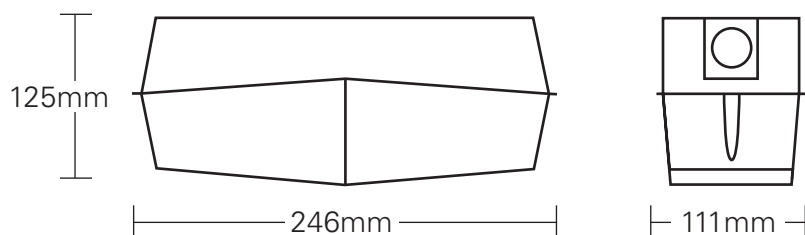

Max Dim(mm)
246 x 125 x 111



Julux LED

Weather resistant, LED bulkhead with integral gear.



Specifications

- Energy efficient 6W 6500K, IP44 LED system
- Integral electronic gear
- Tough single piece IK9 polycarbonate body
- 16mm knock out cable entry
- Gasket is easily replaceable
- Single piece, polycarbonate opal lens
- The diffuser has a smooth exterior for easy maintenance



Quick Spec

Pierlite 6W LED bulkhead, opal diffuser, integral electronic gear.

Design Applications

Stairwells, walkways, general security, commercial, industrial, domestic lighting, under eaves and awnings.

Performance


Julux JLLED84 1xLED

1 x 300 lm



Horizontal Illuminance $\leq 0^\circ$

H	E _{max}
(m)	(lux)
2.0	23
3.0	10
4.0	6

M.F.= 1.0

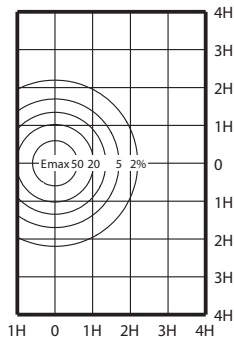

Polar intensity diagram

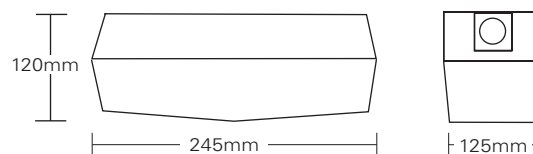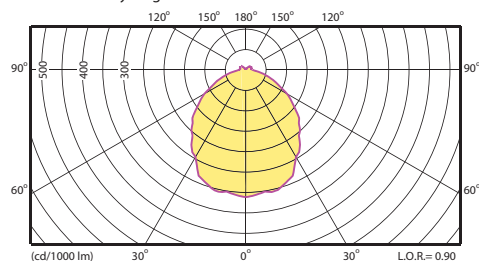

Product Codes

Code	Version	Dim (mm)	Mass (kg)
JULUXLED	6W LED	245 x 125 x 120	1.2



Max Dim(mm)
245 x 125 x 120





6W High efficient LED system.



Sleek tapered design complete with a 16mm knock out cable entry.



The Julux LED is a weather resistant cost saving luminaire.



Stelle Bulkhead

A stylish architectural wall mounted luminaire available in a variety of modern shapes and colours.



Specifications

- Die cast aluminium body
- Powder coated for increased protection
- Available in white and black finish
- Frosted toughened glass lens
- Complete with porcelain E27 lamp holder
- Available in Round or Oval shape
- Choice of decorative eyelid or cage for a range of applications and looks
- Suitable for CFL/I lamps



Quick Spec

Pierlite die cast aluminium powdercoated range offering E27 lamp holder suitable for CFL lamps.


Design Applications

Balconies, porches, facades, decks, walkways.

Product Codes

Code	Version	Dim (mm)	Mass (kg)
Eyelid oval			
AL232SB	Black	210 x 110 x 95	0.9
AL232SW	White	210 x 110 x 95	0.9
Open cage oval			
AL236SB	Black	210 x 110 x 90	0.9
AL236SW	White	210 x 110 x 90	0.9
Open cage round			
AL301SB	Black	180 x 180 x 90	0.9
AL301SW	White	180 x 180 x 90	0.9
Eyelid round			
AL306SB	Black	180 x 180 x 95	0.9
AL306SW	White	180 x 180 x 95	0.9

Performance

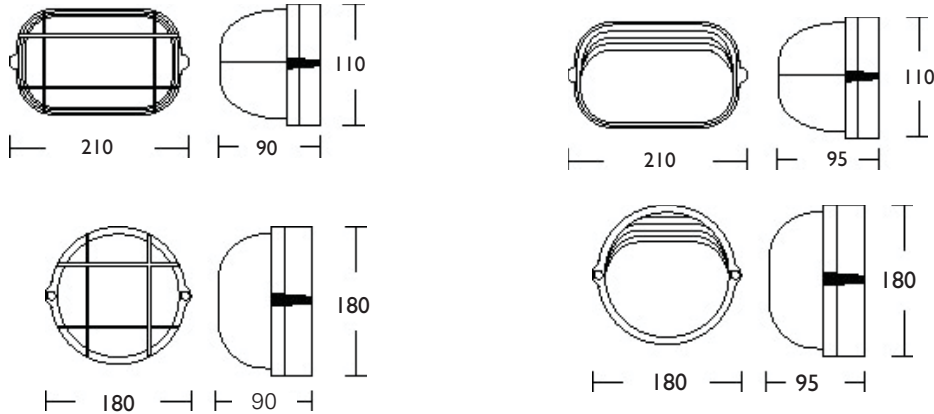

Max Dim(mm)
210 x 110 x 95



TKB Series

The TKB Series is an architectural wall wash range offering the designer a variety of options.



Specifications

- Body of zinc steel powder coated silver
- Reflector of matt aluminium for low glare performance
- Asymmetric reflector for even illumination
- Internal frosted glass diffuser
- Spring metal clips for easy installation
- Easy lamp replacement
- Variety of sizes and wattages



Quick Spec

Pierlite zinc steel powder coated silver, asymmetric, internal glass, wall mount series

Design Applications

Boardrooms, lobbies, office, foyers, reception areas and hotels.

Performance



Product Codes

Code	Version	Dim (mm)	Mass (kg)
TKB35	50W LV	90 x 90 x 90	0.6
TKB49	50W LV	80 x 236 x 90	3.0
TKB50	150W DE TH	180 x 260 x 90	4.0
TKB54	26W PLC	250 x 230 x 90	4.0
TKB55	18W PLC	230 x 160 x 90	4.0



Max Dim(mm)
250 x 230 x 90



Yarra 400

A compact lightweight halogen flood made of die-cast aluminium in powder coated black finish.



Specifications

- Shovel faced floodlight
- Die cast aluminium body
- Aluminium alloy reflector
- Adjustable head
- Quality porcelain lamp holder
- Supplied with 240v 400 watt T.H lamp
- Suitable for indoor and protected exterior applications





Quick Spec

Pierlite die cast floodlight rated to 400W.

Design Applications

Gardens, BBQ areas, outdoor pools

Performance

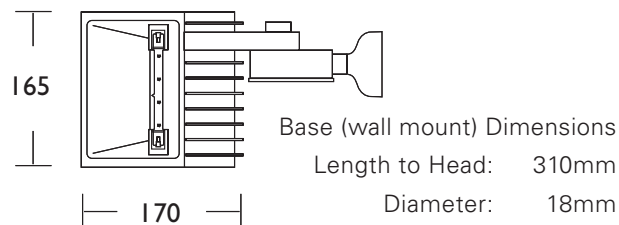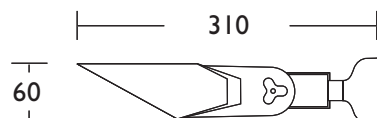

Product Codes

Code	Version	Dim (mm)	Mass (kg)
Y400	400W	310 x 165 x 60	0.6





Die cast aluminium body.

400 watt Eco halogen lamp.

Adjustable head assembly.



Force Flood Eco

Functional design suitable for indoor or outdoor mounting under eaves or on walls in protected areas.



Specifications

- Ceramic E27 lamp holder
- Complete with 120 watt PAR38 lamp or 23 watt energy efficient PAR38 CFL (Force Flood Eco)
- Base suitable for 66mm round junction box
- Force Flood Eco complete with 23 watt CFL PAR38 lamp
- 6000 hours rated average life (23 watt CFL PAR23)
- Energy consumption reduced by 80% compared to 120 watt PAR38 equivalent




Quick Spec

Pierlite, E27 floodlight rated to 120W, offering an IP44 solution for mounting in protected areas.


Design Applications

BBQ Area's, Pools, Garden Area's.

Performance

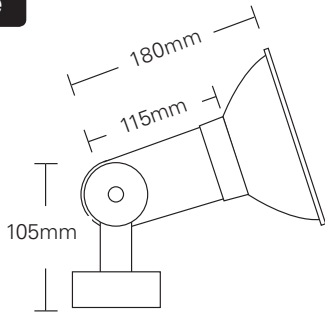

FFP120 / FFP23
Head dimensions (no lamp): 115(l)mm x65(w)mm
Base Diameter: 65mm

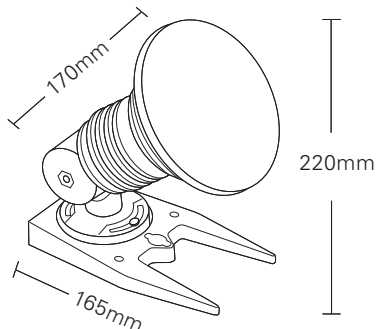

FFP120SFP
Base Width: 100mm
Head Width: 62mm


Product Codes

Code	Version	Dim (mm)	Mass (kg)
FFP120	120W PAR38	180 x 105	0.56
FFP120SFP	120W PAR38 c/w stand, F&P	170 x 165 x 220	0.56
FFP23	23W PAR38 CFL-I	180 x 105	0.56



Securipar

Securipar is a compact and flexible security light which can be mounted on walls and under eaves.

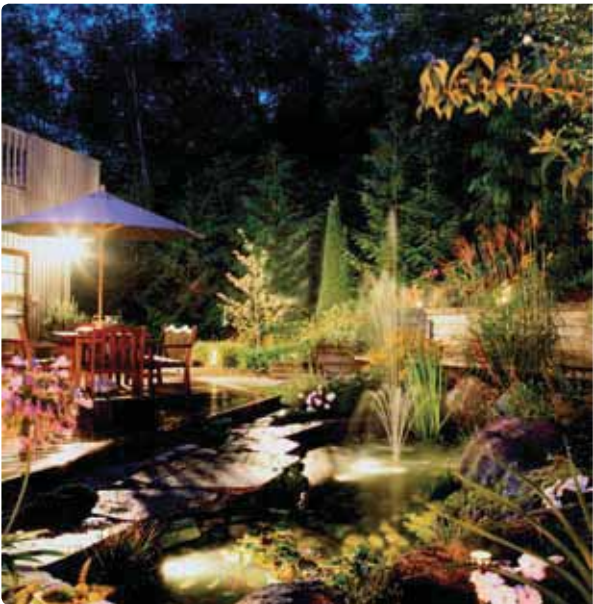

Specifications

- PAR 38 twin floodlight
- UV stabilised flame retardant black plastic body
- Two weatherproof lamp holders with high temperature silicon rubber gasket
- PIR detector, controls for both time and day light sensitivity
- Detection zone 12 metre with a radius of 110°
- Ceramic lamp holders
- Lamp holders rotate 160° and pivot through 250°
- Supplied less lamps



Quick Spec

Pierlite UV stabilised IP44 weather proof adjustable twin head surface mounted system, complete with on board time and light sensitivity.

Design Applications

Residential, security and passageways.

Performance



Surface plate Ø105mm
Head Dimensions (no lamp) 97mm x 55mm
Sensor Dimensions: 18mm

Product Codes

Code	Version	Dim (mm)	Mass (kg)
QHF560	E27 lamp holder	105 x 115	0.39



Max Dim(mm)
105 x 115



LED Sense 1

Outdoor Security Motion Sensor High Power LED Spotlight



Specifications

- Aluminium housing complete with sturdy mounting base
- High power 3W LED system, with total power consumption of 5W
- Power source: AC 100-240V 50Hz
- Sensor range: 5M * 140 degree
- With timer (5 sec-7min) & Lux (Sun-Moon) adjustment
- Colour temperature: 6500K Cool White
- The system is IP44



Quick Spec

Pierlite clean lined black IP44 aluminium body offering 3W LED complete with an onboard 5 metre sensor.

Design Applications


Residential, security and passageways.

Performance

LEDSENSE1 3xLED

L.O.R.= 0.99 3 x 66 lm

Polar intensity diagram

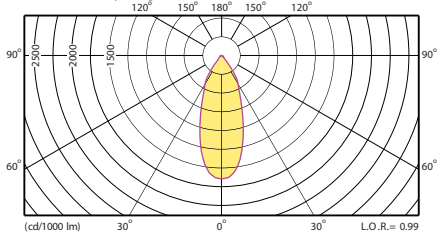

Timer & Lux adjustment



Sensor range: 5M * 140 degree

Product Codes

Code	Version	Dim (mm)	Mass (kg)
LEDSENSE1	3W LED	80 x 130	0.5



LED Sense 2

Outdoor Security Motion Sensor High Power LED Floodlight



Specifications

- Robust aluminium LED housing complete with functional surface mount base
- High power 8W LED system with a total power consumption of 12W
- Power source: AC 100-240V 50Hz
- Sensor range: 5M * 140 degree
- With timer (5 sec-7min) & Lux (Sun-Moon) adjustment
- Colour temperature: 6500K Cool White
- The system is IP44



Quick Spec

Pierlite clean lined black IP44 aluminium body offering 8W LED complete with an onboard 5 metre sensor.

Design Applications

Residential, security , passageways and under eaves

Performance

LEDSENSE2 8xLED

L.O.R.= 0.99 8 x 66 lm

Polar intensity diagram

(cd/1000 lm) 0 - 180 ° 90 - 270 °

Integrated motion sensor

Multi-angle rotation

Product Codes

Code	Version	Dim (mm)	Mass (kg)
LEDSENSE2	8W LED	160 x 110	1.5

LED Sense 3

Energy efficient LED IP65 Floodlight



Specifications

- Robust aluminium housing complete with trunnion mounting frame
- High power 15W LED system with a total power consumption of 25W
- Power source: AC 100-240V 50Hz
- Sensor range: 5M *140 degree
- Designed with a pre-set 3 min (off) time delay
- Colour temperature: 6500K Cool White
- IP Rating: IP65
- For optimum performance the product has defined vertical aiming limits. Please refer to the Installation Instructions or www.pierlite.com for recommended angles



Quick Spec

Pierlite clean lined black IP65 aluminium body offering 15W LED complete with an onboard 5 metre movement sensor.



Design Applications

Residential, security and passageways.

Performance

LEDSense3 15xLED

L.O.R.= 1.00 15 x 55 lm

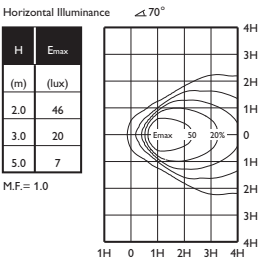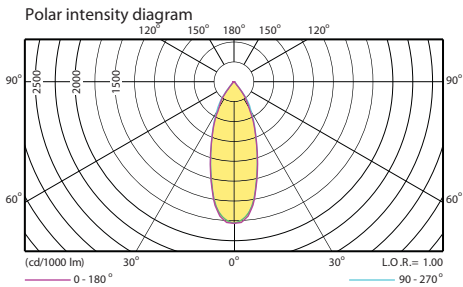

Product Codes

Code	Version	Dim (mm)	Mass (kg)
LEDSense3	15W LED	235 x 220	2.5



IP65



Max Dim(mm)
235 x 220





**Electronic
Control Gear**

Die cast aluminium housing.

Energy efficient LEDS

Adjustable mounting bracket



IP65 cable termination.



Integrated motion sensor.

On board sensor

LED Sense 4

The LEDSense 4 is an extension to our LEDSense range offering LED technology with complete control.



Specifications

- Robust IP65 black aluminium housing complete with trunnion mounting frame
- High powered 15W LED system with a total power consumption of 25W
- Colour Temperature 6500K, cool white
- For optimum performance the product has defined vertical aiming limits. Please refer to the Installation Instructions or www.pierlite.com for recommended angles



Quick Spec

Pierlite IP65 aluminium LED floodlight no sensor on board, 15W High power performance.



Design Applications

Residential, security passageways, commercial and perimeter illumination

Performance

LEDSense3 15xLED

L.O.R.= 1.00 15 x 55 lm

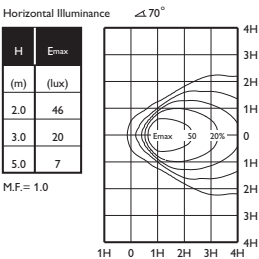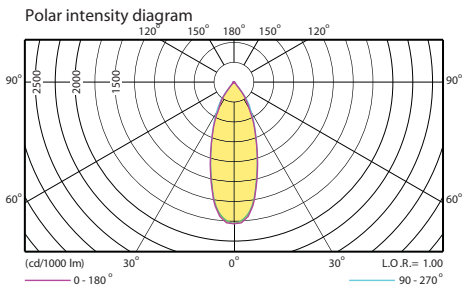

Product Codes

Code	Version	Dim (mm)	Mass (kg)
LEDSense4	15W LED	235 x 220	2.5



IP65



Max. Mass

Max Dim(mm)
235 x 220





**Electronic
Control Gear**

Die cast aluminium housing.

Adjustable mounting bracket



IP65 cable termination.

Energy efficient LEDS



Electronic
Control Gear



IP65



huntzman LED floodlight performance just got a whole





lot brighter!

Pierlite Australia introduce the new Huntsman LED Floodlight. Robust aluminium frame, IP65 protection and superb optical performance. Coming soon for 2012.

LED Technology

Energy efficient

For product online reference data,
simply install and activate a QR code
scanner application on your smartphone.

For more information visit
www.pierlite.com



LEDTrace 2CW LEDTrace 5CW

An LED solution that allows a flexible continuous ribbon of light in small spaces.



Specifications

- A unique flexible LED ribbon
- Cool White 2000mm in length
- 65Lm /W, Beam angle of 120 degrees
- Remote 36W electronic control gear comes in the LEDTrace 2CW Kit
- Adhesive back fixing
- Flex & Plug included
- Surface mounted
- Clearly marked cut-lines
- For optional 5 mtr extension pack order the LEDTrace 5CW
- Accessory pack of joiners and end caps included




Quick Spec

Pierlite white strip complete with 3M fixing, interior rated 65Lm system, complete with electronic control gear.

Design Applications

Residential, cafes, restaurants, display cabinets, retail environments, interior architectural illumination

Performance

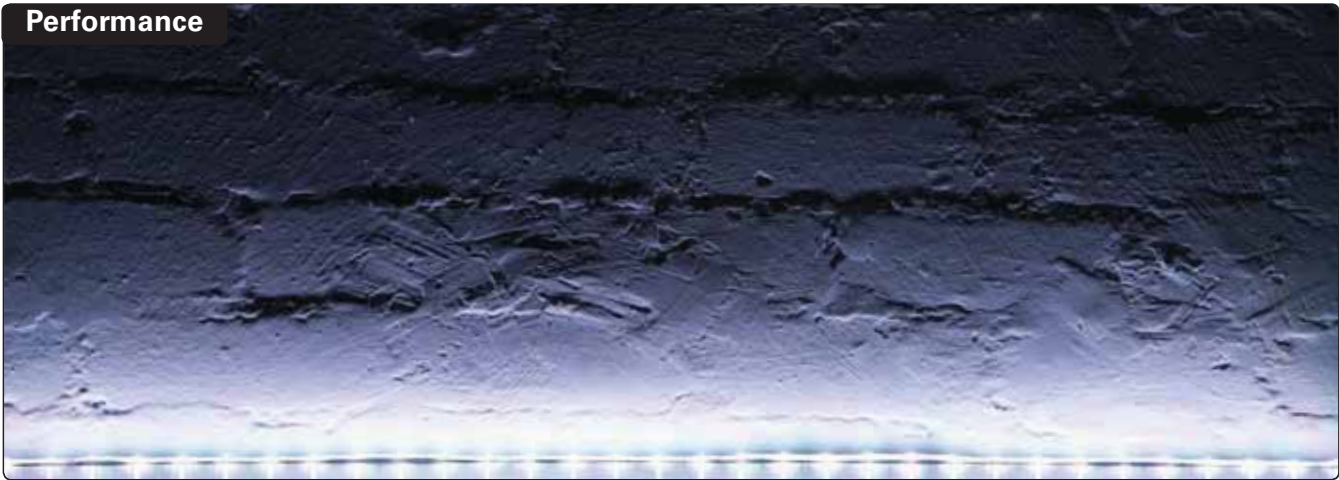


Product Codes

Code	Version	Dim (mm)	Mass (kg)
LEDTRACE2CW	Starter Cool White	2000mm	0.7
LEDTRACE5CW	Joiner Cool White	5000mm	0.2




Max Dim(mm)
5000



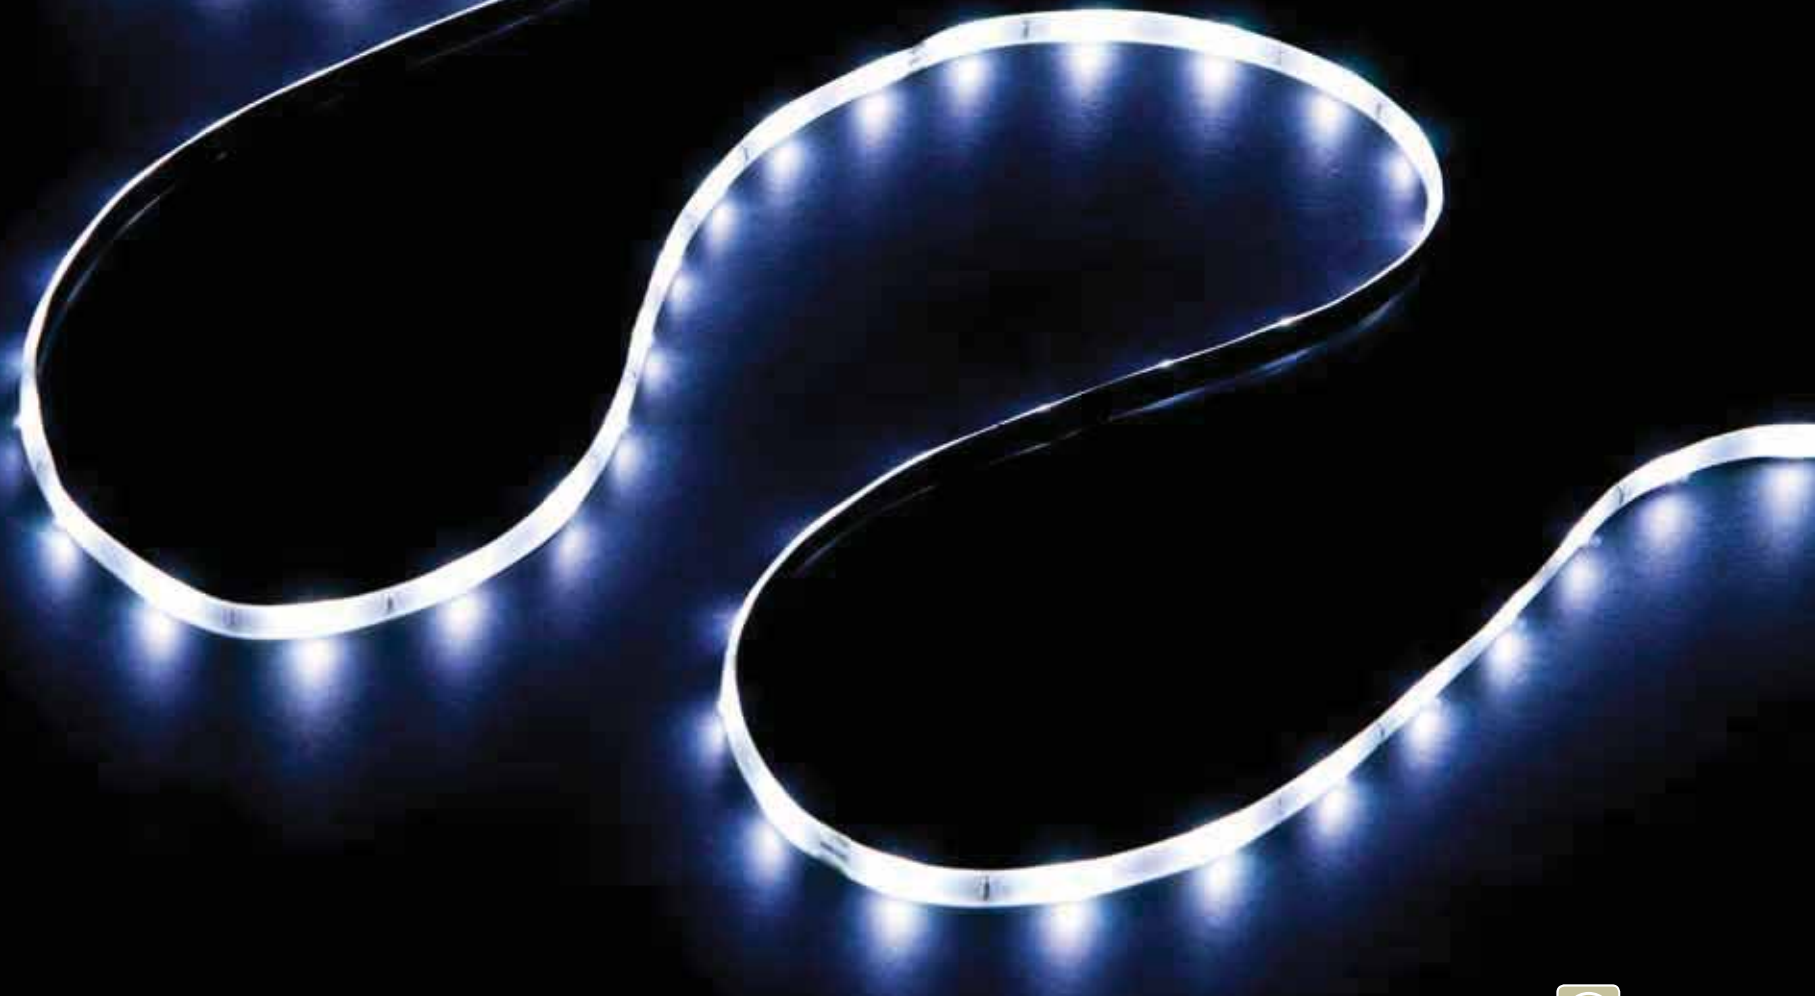

LEDTrace 2 RGB / 3 RGB

An LED solution that allows a flexible colour changing continuous ribbon of light in small spaces.

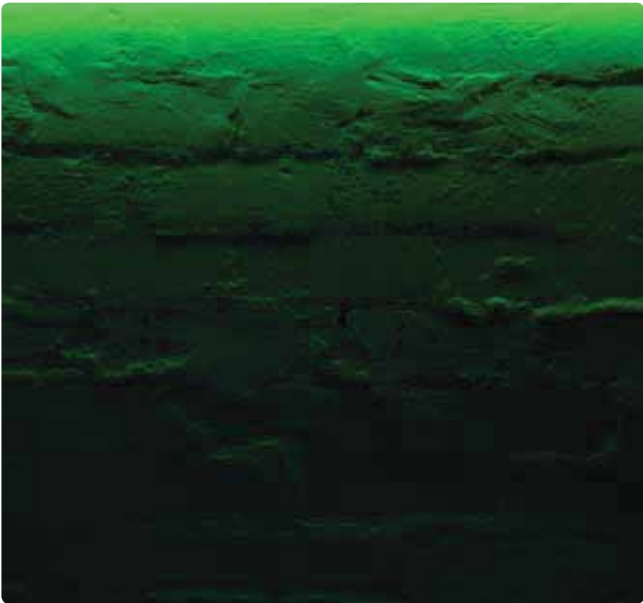

Specifications

- A unique flexible LED RGB ribbon
- Beam 120 degrees
- Blue 10 Lm /W
- Green 45 Lm/W
- Red 15 Lm/W
- Remote 36W electronic control gear supplied with the LEDTrace 2 RGB starter kit
- Using the LEDTrace 3 RGB joiner Kit a maximum RGB ribbon length of 5 metres can be achieved
- Adhesive back fixing for surface mounting
- Complete with remote control
- Flex & Plug included
- Clearly marked cut-lines
- RGB versions are only dimmable with compatible LEDTrace driver only
- Accessory pack of joiners and end caps included



Quick Spec

Pierlite starter kit, LEDTrace 2RGB self adhesive strip, complete with 36W electronic control gear, remote control, joiners and end caps


Design Applications

Residential, cafes, restaurants, display cabinets, retail environments, interior architectural illumination

Performance



Red

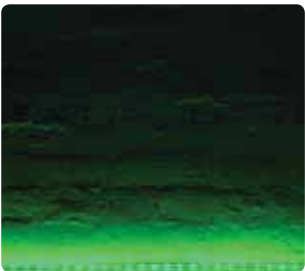

Green



Blue



White

Product Codes

Code	Version	Dim (mm)	Mass (kg)
LEDTRACE2RGB	Starter RGB	2000mm	0.7
LEDTRACE3RGB	Joiner RGB	3000mm	0.2



Max Dim(mm)
3000



