

Splendore

Splendore IP44, 316 grade stainless trim with white glass lens.



Features

- Base of powder coated sheet metal
- Decorative 316 grade stainless steel trim
- Frosted lens in toughened glass
- Complete with porcelain E27 lamp holder
- Suitable for compact fluorescent lamps up to 23 watt
- Two versions available, AL772 includes decorative stainless steel strap AL773 is plain frosted toughened glass


- IP44 allows for use in exterior applications not in direct weather

Applications

Balconies, BBQ area's, facades.



Technical

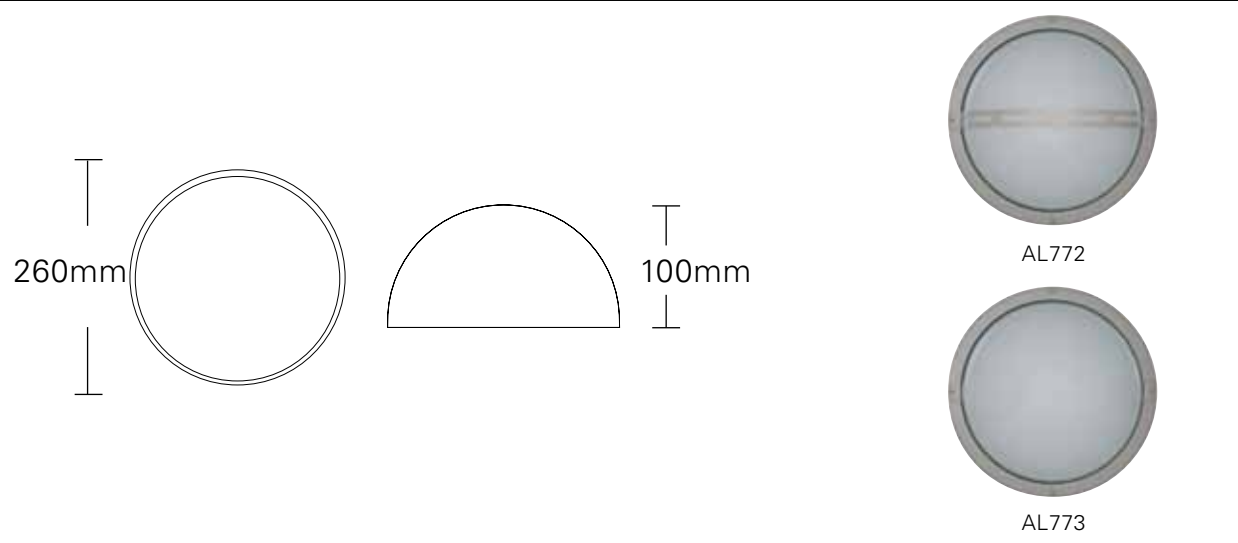

Product Codes		Dim	Mass
Code	Version	(mm)	(kg)
IP44 less lamp			
AL773	Splendore	260 x 100	1.4
AL772	Splendore c/w decorative strap	260 x 100	1.4



182 Residential



IP44



Max. Mass

max dim(mm)
260 x 100



to 25

PIERLITE
professional lighting solutions

Stanza

Stanza glass ceiling light with acid white glass and chrome clips.




Features

- Decorative toughened glass diffuser in acid white finish
- Three chrome clips support the diffuser and allow for easy removal
- Metal base powder coated white for increased performance
- Low profile of only 76mm ceramic E27 lamp holder
- Stanza suitable for max 11 watt CFL/I lamps

Applications

Residential, units, stairwells, foyers, modern homes, kitchens, dining rooms, living areas, bed rooms. Areas with low ceiling heights.

Technical

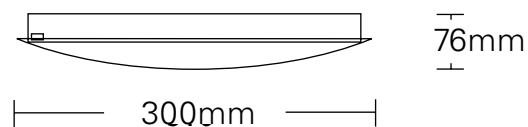

Diffuser Diameter: 300mm
Base Height: 20mm




Product Codes		Dim	Mass
Code	Version	(mm)	(kg)
CF602	Max 11W CFL-I less lamp	300 x 76	1.7



BCS Circular

High quality T8 circular luminaire, suitable for interior use.

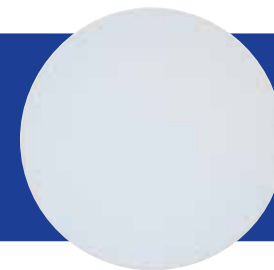

Features

- Durable polycarbonate opal diffuser
- Twist lock attachment for easy lamp change
- Durable metal base
- Two wattages for a wide range of uses, including 22 watt and 32 watt T8 circular fluorescent.
- Energy efficient Low Loss ballast assisting in BCA compliance
- Includes colour 840 lamp



Applications

Aged care, residential, units, stairwells, bed rooms, living rooms, kitchens, nursing homes, hallways.

PHILIPS



Technical

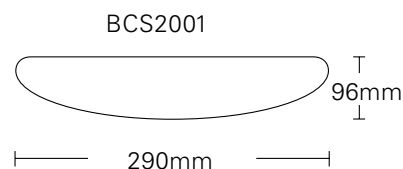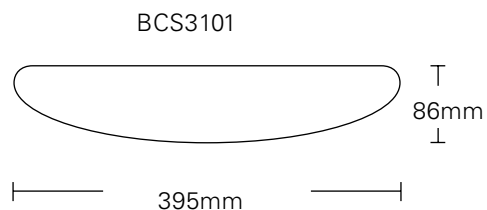

Product Codes		Dim	Mass
Code	Version	(mm)	(kg)
BCS2001	22W Circular luminaire	290 x 96	0.41
BCS3101	32W Circular luminaire	395 x 86	0.41



184 Residential

IP20




max dim(mm)
395 x 86



PIERLITE
professional lighting solutions

BCW Weatherproof

Slim line T8 circular luminaire, IP54, suitable for both indoor and outdoor applications.

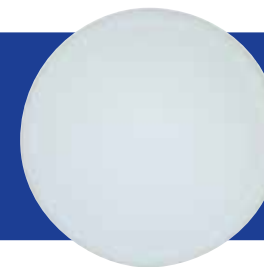

Features

- Durable polycarbonate opal diffuser
- Twist lock attachment for easy lamp change
- Durable metal base
- Two wattages for a wide range of uses, including 22 watt and 32 watt T8 circular fluorescent.
- Energy efficient Low Loss ballast assisting in BCA compliance
- Includes colour 840 lamp



Applications

Balconies, BBQ area's, walkways, decks, lobbies, carports, nursing homes, aged care facilities, hallways.

PHILIPS



Technical

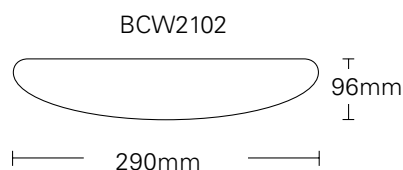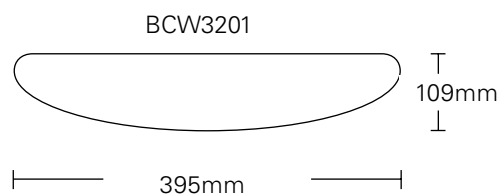

Product Codes		Dim	Mass
Code	Version	(mm)	(kg)
BCW2102	22W Circular T8	290 x 96	0.41
BCW3201	32W circular T8	395 x 109	0.41



TR31

With its simple yet stylish appearance, this economy interior or exterior bulkhead blends unobtrusively into almost any environment.



Features

- Completely smooth and clean white exterior for ease of maintenance
- TR31 is the appropriate solution where aesthetics and functionality are the main considerations
- Body and diffuser made of high impact UV stabilised opal polycarbonate
- Diffuser securely snap locks onto body to provide a well sealed fit preventing the ingress of contaminants
- Provision for cable entry through opening in rear of body
- BC lamp holder for a 23 watt CFL-I lamp version


- Polycarbonate construction affords a high degree of impact and vandal resistance

Applications

Designed for interior and exterior use out of direct weather effected areas such as stairwells, change rooms, apartment buildings, amenity facilities, hotels, clubs as well as under eaves and awnings.



Technical

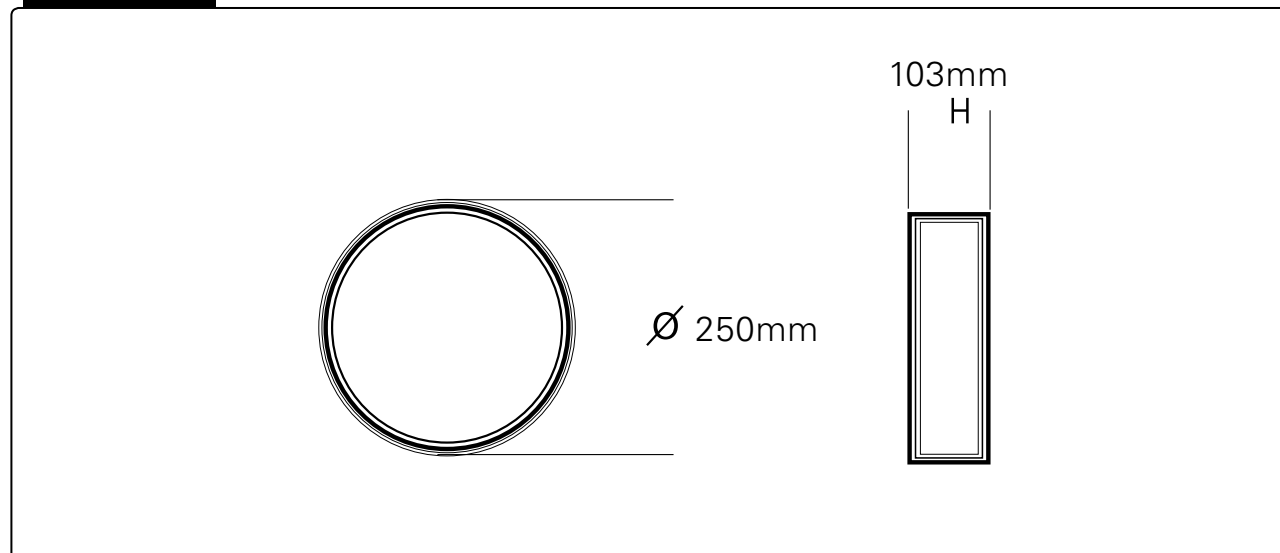

Product Codes		Dim	Mass
Code	Version	(mm)	(kg)
TR31	BC Lamp-holder 23W CFL-I less lamp	250 x 103	0.8
TR329	2 x 9WTC-L9W-840	250 x 103	1.4
TR322	22W T8 Circ c/w lamp	250 x 103	1.5
TR322NM	22W T8 Circ c/w lamp Non Maintained	250 x 103	1.5



186 Residential

IP43



Max. Mass

max dim(mm)
250 x 103



PIERLITE
professional lighting solutions



Polo

Comprehensive range of IP65 Oysters utilising the latest energy efficient lamp and gear technology.



Features

- Available in two sizes, small 350mm diameter and large 430mm diameter
- Made from PMMA plastic with metal gear tray
- Opal diffuser increasing lamp obscuration
- Small version up to 1 x 22 watt T5 circular and large up to 40 watt T5 circular
- Three captive clips allowing for positive diffuser attachment, while allowing for easy lamp access
- White powder coated gear tray optimises luminaire efficiency
- Utilises energy efficient electronic control gear

Applications

Aged care facilities, nursing homes, residential and commercial.

Technical



Integral control gear



Secure IP65 clips



Product Codes		Dim	Mass
Code	Version	(mm)	(kg)
PLS122T5E4	22WT5 EL Circ 840	350 x 130	1.55
PLL140T5E4	40WT5 EL Circ 840	430 x 150	1.95



188 Residential



IP65



1.95kg
Max. Mass

max dim(mm)
430 x 150



PIERLITE
professional lighting solutions



TKB Series

The TKB Series is an architectural wall wash range offering the designer a variety of options.




Features


- Body of zinc steel powder coated silver
- Reflector of matt aluminium for low glare performance
- Asymmetric reflector for even illumination
- Internal frosted glass diffuser
- Spring metal clips for easy installation
- Easy lamp replacement
- Variety of sizes and wattages

Applications

Boardrooms, lobbies, office, foyers, reception areas and hotels.

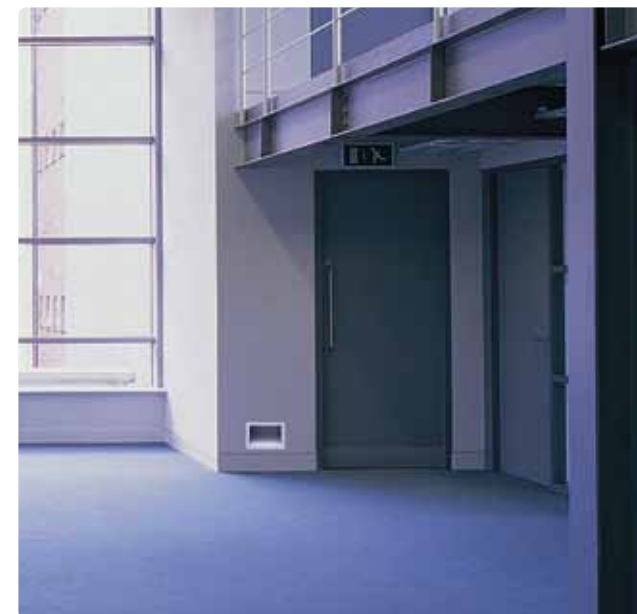

Technical

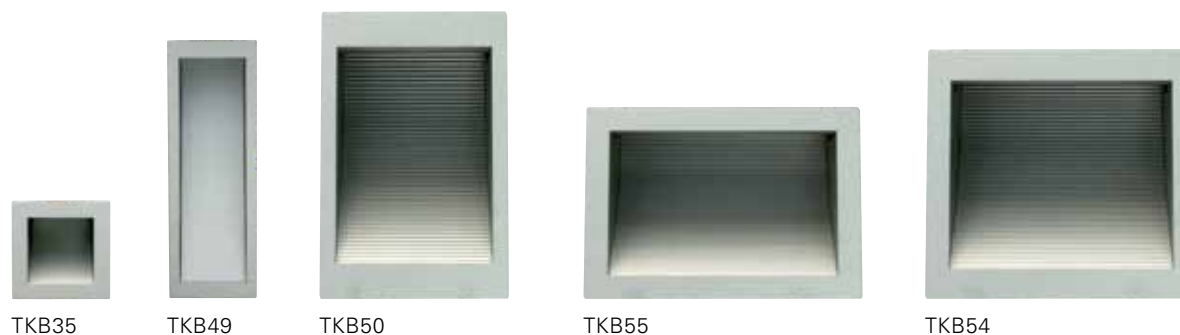

Product Codes		Dim	Mass
Code	Version	(mm)	(kg)
Square w/washer less lamp and gear			
TKB35	50W LV	90 x 90 x 90 (80 x 80)	0.6
Rectangular w/washer less lamp and gear			
TKB49	50W LV	80 x 236 x 90 (70 x 220)	3.0
TKB50	150W DETH	180 x 260 x 90 (170 x 230)	4.0
TKB55	18W PLC	230 x 160 x 90 (195 x 130)	4.0
TKB54	26W PLC	250 x 230 x 90 (215 x 200)	4.0



190 Residential

IP20



max dim(mm)
250 x 230 x 90



PIERLITE
professional lighting solutions

Esterno

Esterno IP44 die-cast aluminium wall lights suitable for exterior walls.





Features

- Die cast aluminium housing
- Powder coated black ceramic E27 lamp holder
- Two versions for a variety of applications
- Suitable for exterior applications
- CFL lamps up to 23 watt

Applications

Balconies, porches, suitable for exterior locations.

Technical

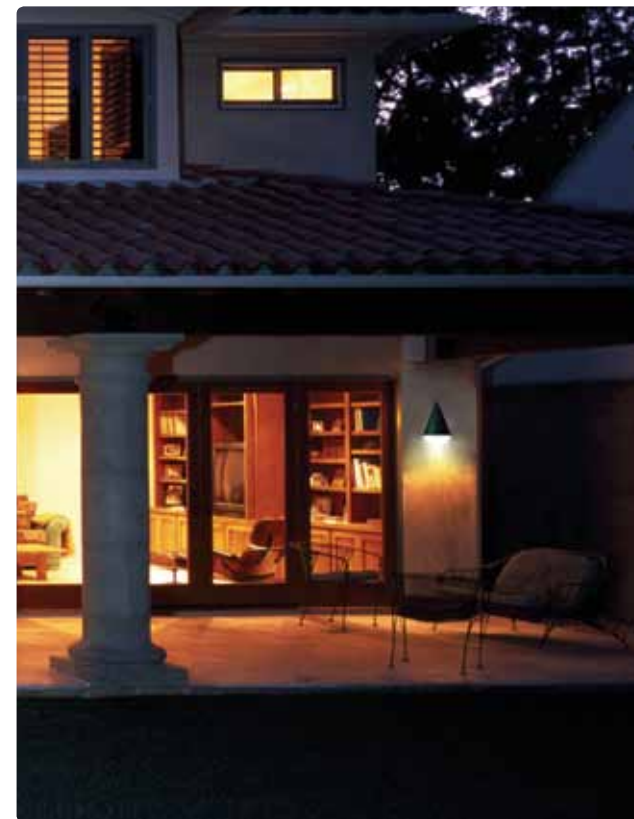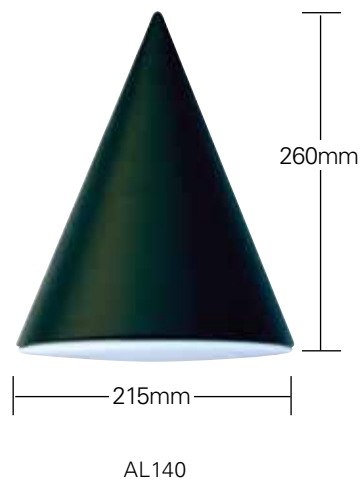

Product Codes		Dim
Code	Version	(mm)
AL140	Up to 23W CFL less lamp	260 x 215 x 115
AL150	Up to 23W CFL less lamp	190 x 135 x 110



Stelle Bulkhead

A stylish architectural die-cast aluminium bulkhead available in a variety of shapes and colours.



Features





- Die cast aluminium body
- Powder coated for increased protection
- Available in white and black finish
- Frosted toughened glass lens
- Complete with porcelain E27 lamp holder
- Available in Round or Oval shape
- Choice of decorative eyelid or cage for a range of applications
- Suitable for CFL/I lamps.

Applications

Balconies, porches, facades, decks, walkways.



Technical

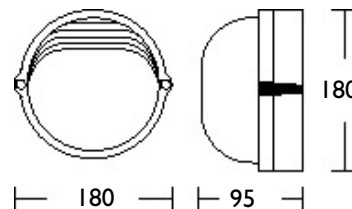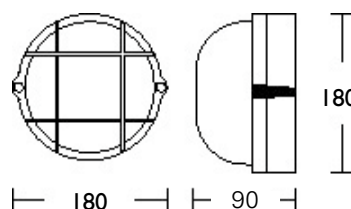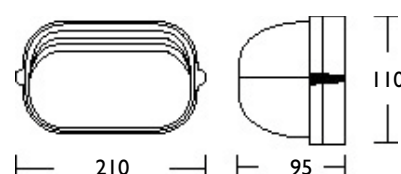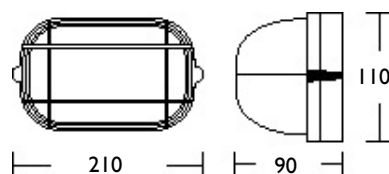

Product Codes		Dim	Mass
Code	Version	(mm)	(kg)
White			
AL236SW	Open cage oval	210 x 110 x 90	0.90
AL232SW	Eyelid oval	210 x 110 x 95	0.90
AL301SW	Open cage round	180 x 180 x 90	0.90
AL306SW	Eyelid round	180 x 180 x 95	0.90
Black			
AL236SB	Open cage oval	210 x 110 x 90	0.90
AL232SB	Eyelid oval	210 x 110 x 95	0.90
AL301SB	Open cage round	180 x 180 x 90	0.90
AL306SB	Eyelid round	180 x 180 x 95	0.90



192 Residential

IP44



max dim(mm)
210 x 110 x 95



PIERLITE
professional lighting solutions



Stelle AL232SB



Stelle AL236SB



Stelle AL306SB



Stelle AL301SB



Pierlite ELV Downlight

Recessed low voltage downlights supplied with Energy Saving 35 watt IRC lamp, Guardian heat cover and dimmable transformer.



Features


- Pressure die-cast aluminium body available in white (fixed and gimble) and satin chrome (gimble)
- Secure twist lock lamp retaining assembly
- Complete with dimmable electronic transformer
- Supplied with 5000hr 35 watt IRC 60 degree lamp
- Versions available in both hard wired & flex & plug
- Completely assembled for ease of installation
- Guardian heat cover allows for 25mm clearance from insulation and combustible material at an ambient temperature of up to 70° C
- 500mm LH leads included

Applications

Residential, retail, commercial.



Technical

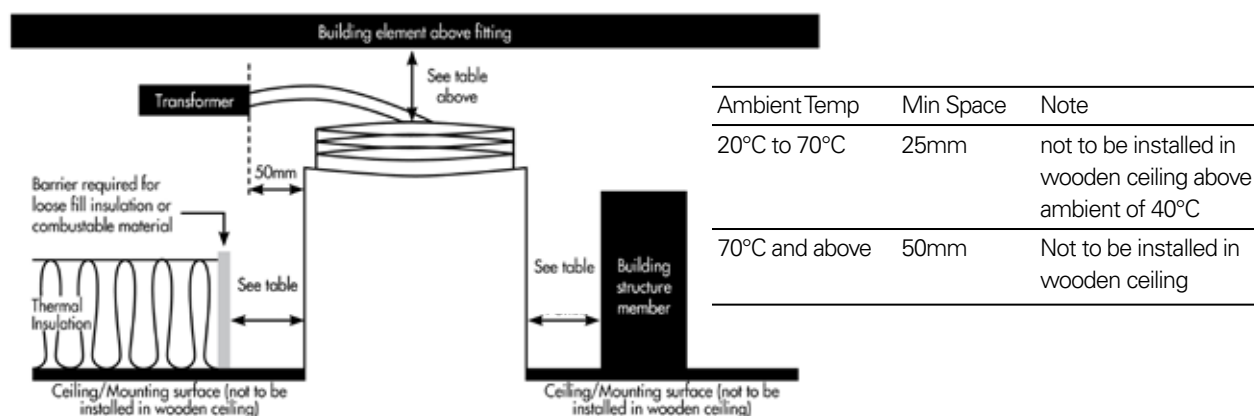

Product Codes		Dim
Code	Version	(mm)
Fixed - Cutout 70mm c/w lamp gear and heat can		
FLGW35/E	White	80 x 80
FLGW35FP/E	White c/w F&P	80 x 80
Gimble - Cut Out 92mm c/w lamp gear and heat can		
GLGW35/E	White	105 x 80
GLGW35FP/E	White c/w F&P	105 x 80
GLGCS35/E	Satin Chrome	105 x 80
GLGCS35FP/E	Satin Chrome c/w F&P	105 x 80



194 Residential

IP20



max dim(mm)
105 x 80



PIERLITE
professional lighting solutions



Luxalite ELV Downlight

Recessed low voltage downlights supplied with pre-wired 50W FNV lamp, heat cover and dimmable transformer.



Features


- Pressure die-cast aluminium body available in white (fixed and gimble) and satin chrome (gimble)
- Secure twist lock lamp retaining assembly
- Available in fixed and gimble
- Complete with dimmable electronic transformer
- Supplied with 3000hr 50 watt 60 degree lamp
- Versions available in both hard wired & flex & plug
- Completely assembled for ease of installation
- Heat cover allows for 25mm clearance from insulation and combustible material
- 500mm LH leads included

Applications

Residential, retail, commercial.



Technical

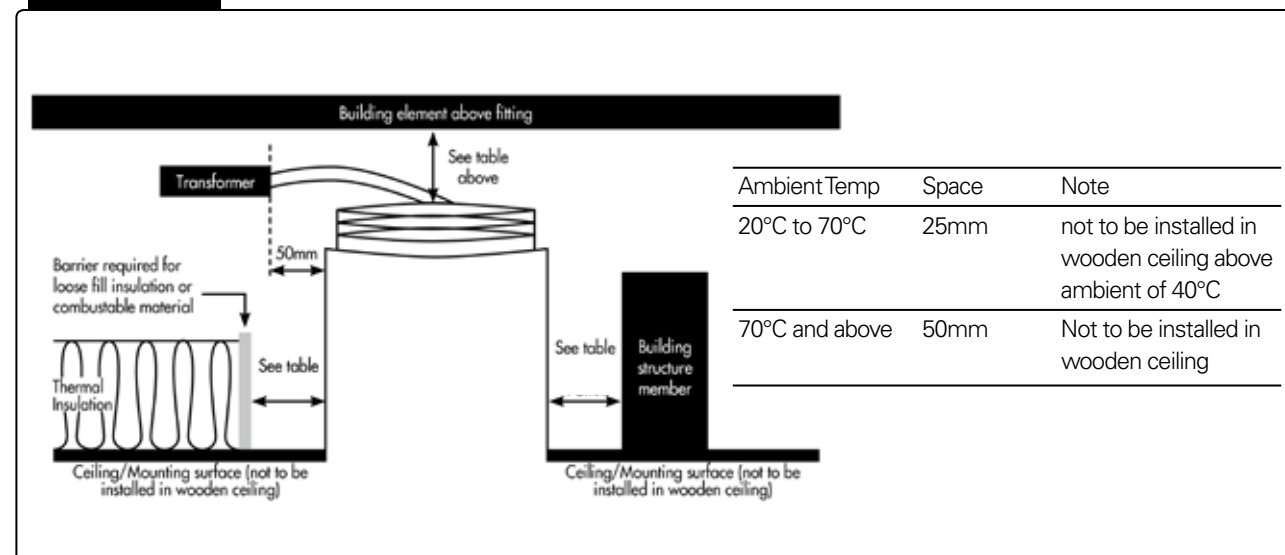

Product Codes		Dim
Code	Version	(mm)
Fixed - Cut out 70mm c/w lamp gear and heat can		
LLFGW50/E	White	80 x 85
LLFGW50FP/E	White c/w F&P	80 x 85
Gimble - Cut Out 92mm c/w lamp gear and heat can		
LLGW50/E	White	105 x 85
LLGW50FP/E	White c/w F&P	105 x 85
LLGCS50/E	Satin Chrome	105 x 85
LLGCS50FP/E	Satin Chrome c/w F&P	105 x 85



196 Residential

IP20



max dim(mm)
105 x 85



PIERLITE
professional lighting solutions

Elite

The Elite range offers high quality, low voltage downlights.



Features


- Constructed from die cast aluminium and high tensile steel spring retention clips
- Easy to install luminaire simple lamp change with a twist lock lamp replacement feature on the fixed and adjustable version
- The adjustable and rotatable versions allow the body to be removed from the separate mounting ring
- Available in white or brushed chrome

Applications

Apartments, foyers, retail stores and shopping centres.




Technical

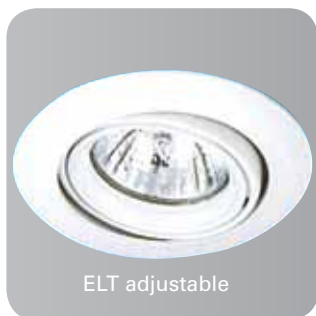

ELT adjustable



ELT fixed

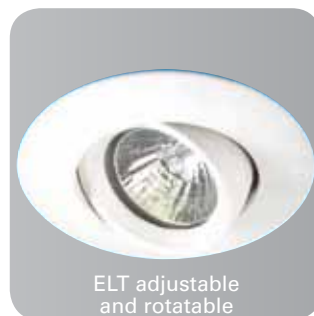

ELT adjustable and rotatable

Product Codes		Dim
Code	Version	(mm)
75mm cutout, Round Fixed - low voltage		
ELT16CFW	MR16 50W 12V White	85 x 23
ELT16CFBC	MR16 50 12V B/Chrome	85 x 23
86 mm cutout, Round Adjustable - low voltage		
ELT16CAW	MR16 50w 12V White	94 x 40
ELT16CABC	MR16 50w 12V B/Chrome	94 x 40
90mm cutout, Round adjustable - low voltage		
ELT16CTRW	MR16 50W 12V White	103 x 40
ELT16CTRBC	MR16 50W 12V B/Chrome	103 x 40
Note - Supplied less lamp, lamp holder and transformer		



Apollo

A compact lightweight halogen flood made of die-cast aluminium in powder coated black finish.



PHILIPS

Features


- Shovel faced floodlight
- Die cast aluminium body
- Aluminium alloy reflector
- Toughened safety glass
- Adjustable head
- Quality porcelain lamp holder
- Supplied with 240v 500 watt T.H lamp

- Suitable for indoor and protected exterior applications

Applications

Gardens, BBQ Area's, outdoor pools.

Technical

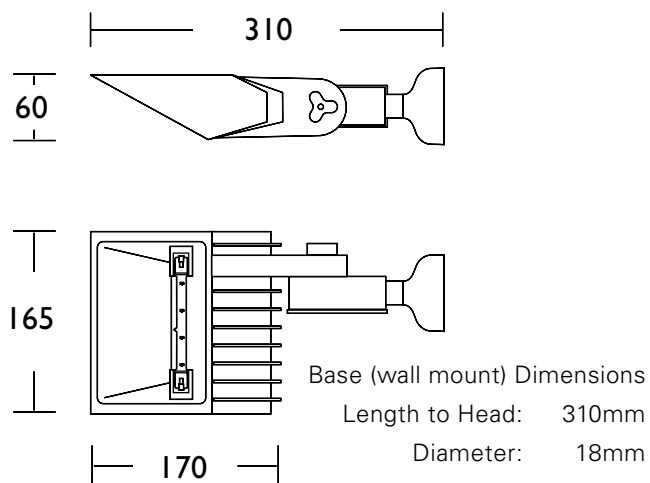

Product Codes		Dim	Mass
Code	Version	(mm)	(kg)
A500	500W halogen flood c/w lamp	310 x 165 x 60	0.60



198 Residential

IP23



0.6kg
Max. Mass

max dim(mm)
310 x 165 x 60



to 25

PIERLITE
professional lighting solutions

Force Flood Eco

New modern design suitable for indoor or outdoor mounting under eaves or on walls in protected areas.



Features

- Ceramic E27 lamp holder
- Complete with 120 watt PAR38 lamp or 23 watt energy efficient PAR38 CFL (Force Flood Eco)
- Base suitable for 66mm round junction box
- Force Flood Eco complete with 23 watt CFL PAR38 lamp
- 6000 hours rated average life (23 watt CFL PAR23)


- Energy consumption reduced by 80% compared to 120 watt PAR38 equivalent

Applications

BBQ Area's, Pools, Garden Area's.




Technical

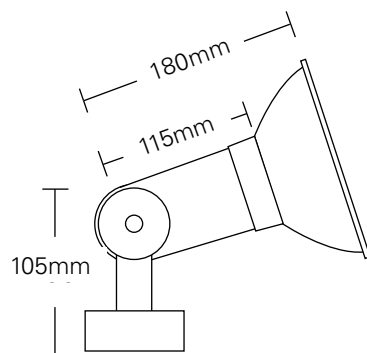

FFP120 / FFP23

Head dimensions (no lamp): 115(l)mm x 65(w)mm

Base Diameter: 65mm

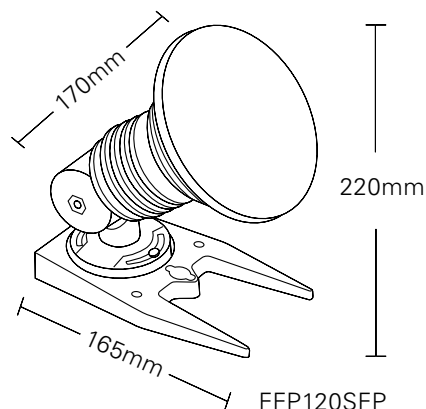

FFP120SFP

Base Width: 100mm

Head Width: 62mm

Product Codes		Dim	Mass
Code	Version	(mm)	(kg)
c/w lamp			
FFP120	120W PAR38	180 x 105	0.56
FFP120SFP	120W PAR38 c/w stand, F&P	170 x 165 x 220	0.56
FFP23	23W PAR38 CFL	180 x 105	0.56



Securipar

Securipar a compact and flexible security light which can be mounted on walls and under eaves.



Features

- PAR 38 twin floodlight
- UV stabilised flame retardant black plastic body
- Two weatherproof lamp holders with high temperature silicon rubber gasket
- PIR detector, controls for both time and day light sensitivity
- Detection zone 12m with a radius of 110°
- Ceramic lamp holders

- Lamp holders rotate 160° and pivot through 250°
- Supplied less lamps

Applications

Residential, security and passageways.



Technical



Head Dimensions (no lamp) 97mm x 55mm
Sensor Dimensions: 18mm

Product Codes		Dim	Mass
Code	Version	(mm)	(kg)
c/w PIR IP44 less lamp			
QHF560	E27 lamp holder	105 x 115	0.39



200 Residential



IP44



0.39kg
Max. Mass

max dim(mm)
105 x 115




to 25

PIERLITE
professional lighting solutions

Minilux

The Minilux is a stylish luminaire ideal for restricted spaces, such as cupboards and walk in wardrobes.

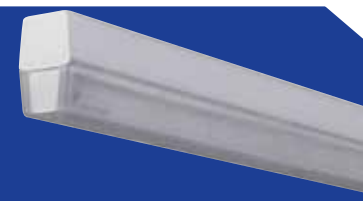

Features


- Lamps 8 watt T5, 13 watt T5
- One piece injection moulded white polycarbonate body and gear cover complete with lamp holder end caps
- Snap on internally frosted polycarbonate diffuser
- Gear cover retained by two Philips head self-cutting screws for positive fixing
- 20mm cable entry through the rear of the body
- Large 6mm² (two way) terminal block

Applications

Cupboards, Walk in robe's, kitchen benches.



Technical

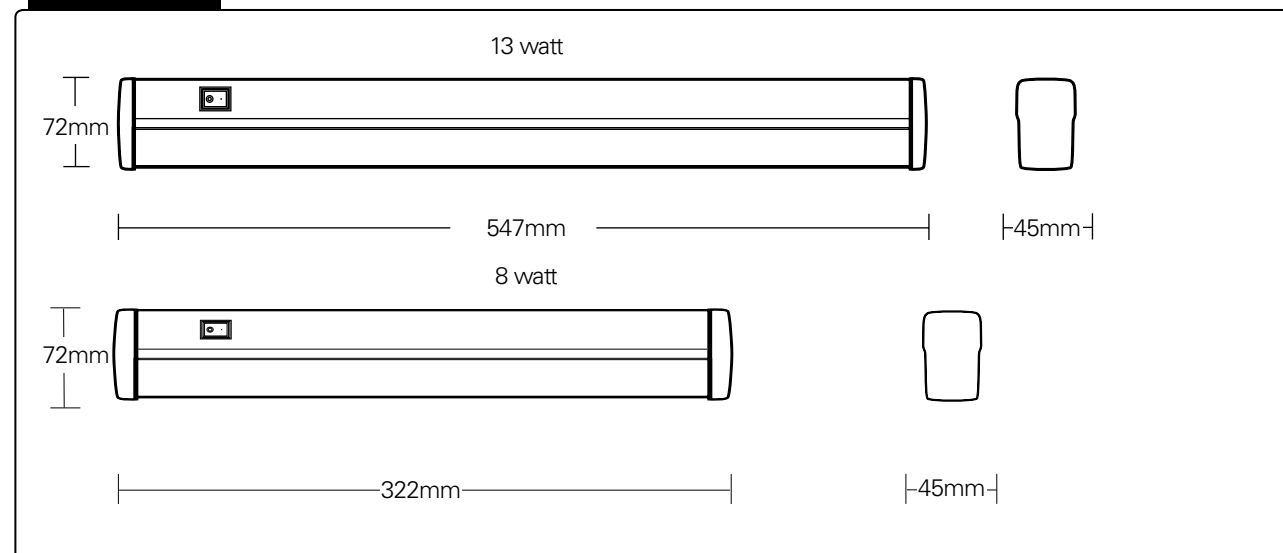


Product Codes		Dim	Mass
Code	Version	(mm)	(kg)
Hard Wired			
MLC108	c/w 8WT5	322 x 45 x 72	0.70
MLC113	c/w 13WT5	547 x 45 x 72	0.80
Switch			
MLC108SW	c/w 8WT5	322 x 45 x 72	0.70
MLC113SW	c/w 13WT5	547 x 45 x 72	0.80
MLC108SWF&P	c/w 8WT5, F&P	322 x 45 x 72	0.80
MLC113SWF&P	c/w 13WT5, F&P	547 x 45 x 72	0.90



Julux

Weather resistant bulkhead for a range of applications.

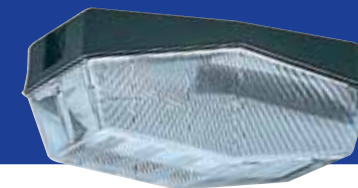

Features


- Tough single piece polycarbonate body
- 16mm knock out cable entry
- Gasket is easily replaceable
- Single piece, clear prismatic polycarbonate lens or translucent opal lens
- Both diffusers have smooth exteriors for easy maintenance
- Supplied standard with high temperature porcelain ES lamp holder
- Fluorescent models fully wired

Applications

Stairwells, walkways, general security, commercial, industrial, domestic lighting, under eaves and awnings.



Technical

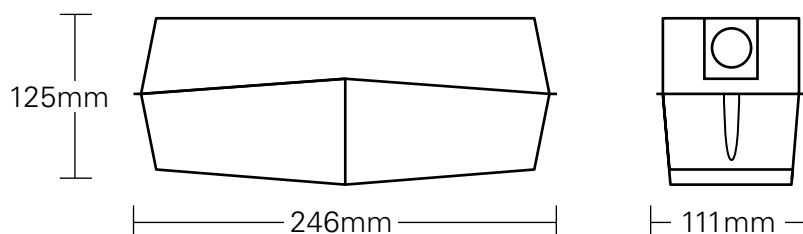

Product Codes

Code	Version
Clear Prismatic Diffuser	
JL100	ES Lamp holder Max 23W CFL-I less lamp
JL109	1 x TC-L9W/840 c/w lamp
JL209	2 x TC-L9W/840 c/w lamp
JL113	1 x TC-D13W/840 c/w lamp
JL118	1 x TC-D18W/840 c/w lamp
JL126	1 x TC-D26W/840 c/w lamp
Translucent Opal Diffuser	
JLT100	ES Lamp holder Max 23W CFL-I less lamp
JLT109	1 x TC-L9W/840 c/w lamp
JLT209	2 x TC-L9W/840 c/w lamp
JLT126	1 x TC-D26W/840 c/w lamp



202 Residential



IP20



Max. Mass

max dim(mm)
246 x 125 x 111



to 25

PIERLITE
professional lighting solutions

