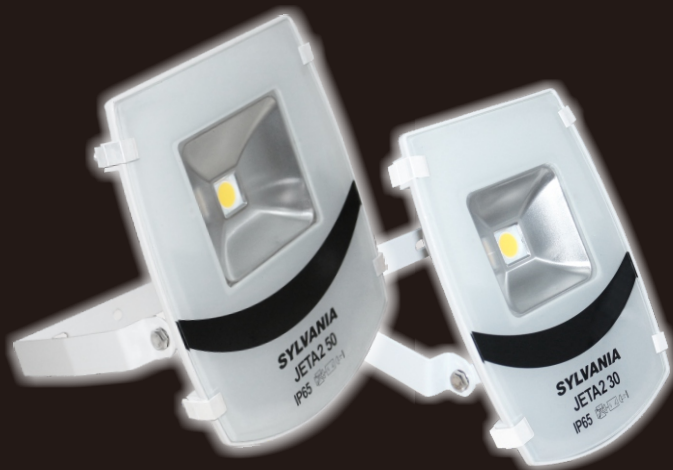# Jeta2 LED
Dimmable Compact Floodlight

The Jeta2 LED is the second generation of this very popular IP65 designed floodlight series.
Still maintaining its unique sleek and elegant body design using high purity aluminium diecast housing and the specially designed rear cooling fin arrangement allowing for excellent heat sinking to ensure optimum LED long life performance.
The Jeta2 incorporates a number of design improvements with much improved lumen output performance (up to 90lm/W) and dimmable* on standard phase dimmers.
The NEW Jeta2 comes in two sizes and two wattages.

The Jeta2 incorporates high quality CREE CXA2520 / 2540 COB LED Chip and a high efficiency constant current LED driver, ensuring optimum performance and colour stability throughout its long operating life.

Jeta2 LED
Dimmable Compact Floodlight

FEATURES

- Two wattages 30W & 50W
- IP65 protection
- Standard phase dimmability
- Two distinct compact sleek elegant designs
- Two colour housing options Black & White
- Sleek elegant design
- Full 360° rotational mounting bracket
- Wide uniform beam distribution of 120°
- Cool White 4500K colour Temperature
- Colour rendering Index Ra75

Jeta2 LED

Code	General Description	Colour Finish	Wattage	Voltage	Input Current Amp	Colour Temp	Lumens	lm/W	Life (h)	Operating Ambient Temp.	Weight
P25138BD	Jeta2 LED 30W	Black	30W	AC 100-240V	1.45A	4500K	2250	≥75	35000	-10℃ to 45℃	2.0 kg
P25138WD	Jeta2 LED 30W	White	30W	AC 100-240V	1.45A	4500K	2250	≥75	35000	-10℃ to 45℃	2.0 kg
P47725BD	Jeta2 LED 50W	Black	50W	AC 100-240V	2.42A	4500K	4500	≥90	35000	-10℃ to 45℃	2.5 kg
P47725WD	Jeta2 LED 50W	White	50W	AC 100-240V	2.42A	4500K	4500	≥90	35000	-10℃ to 45℃	2.5 kg
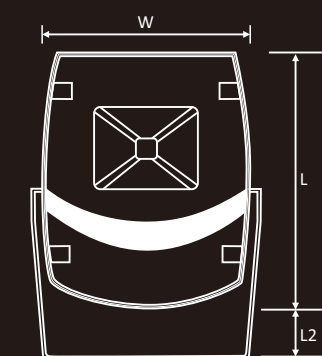
Jeta2 Dimensions (mm)

Watts	L	L2	W	D
30W	260	85	190	45
50W	282	80	240	45
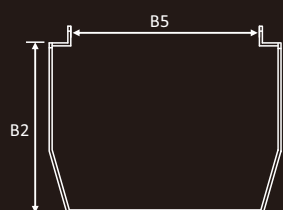
Jeta2 Bracket Dimensions (mm)

Watts	B1	B2	B3	B4	B5
30W	210	170	41x2	20x10	170
50W	260	175	56x2	20x10	210
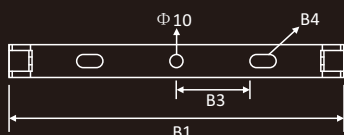
* Dimmability is by standard phase trailing edge/universal or the preferred Diginet Adaptive Phase Dimmer.

www.sla.net.au