

Lumiance

DECCA RANGE





LED



Decca


DECCA PIN HOLE

Decca combines all that is required for a simple yet effective architectural lighting design solution with freedom from compromise.



It encompasses most lighting fundamentals to allow continuity in the overall design process without impacting on performance or appearance.

Features

- Available LED colour temperature 3000k
- 3000k 10w 800lm
- 25° 'pin hole' beam distribution
- Extremely low glare
- Enclosed LED IP44
- One of a family of 3 trim sizes including IP54 and wall wash versions
- Die cast aluminium trim stoved powder coated white finish
- Available with Non dim & Dimmable – Dimmable DALi I-I0v & push to dim (PTD)
- Tool less plug and play format. Driver – mains side, is fitted with a flex and plug. Secondary side is fitted with a quick connect socket. Fixture is fitted with a long tail and quick connect plug
- Suitable for ceiling thickness up to 30mm
- 50,000hr rated life



h (m)	Offset	Cone Width	Illuminance	E _{max} (lx)
0.5		0.21m		3344
1.0		0.41m		836
1.5		0.62m		372
2.0		0.83m		209
2.5		1.04m		134
3.0		1.24m		93



Cut out 85mm

DECCA

Order Code	10W 800lm	3000k	Dimming	White Trim
1816834	•	•		•
1816834D	•	•	•	•



• APPLICATIONS RETAIL / OFFICES / HOTEL & LEISURE / EDUCATIONAL / PUBLIC BUILDINGS / RESIDENTIAL / HEALTHCARE



LED




Decca

DECCA ADJUSTABLE

Decca combines all that is required for a simple yet effective architectural lighting design solution with freedom from compromise. It encompasses most lighting fundamentals to allow continuity in the overall design process without impacting on performance or appearance.

Features


- Available LED colour temperature 3000k
- 3000k 10w 800lm
- 38° adjustable 'pin hole' beam distribution
- Extremely Low glare
- 30° tilt
- Enclosed LED IP44
- One of a family of 3 trim sizes including IP54 and wall wash versions
- Die cast aluminium trim stoved powder coated white finish
- Available with Non dim & Dimmable – Dimmable DALi 1-10v & push to dim (PTD)
- Tool less plug and play format. Driver – mains side, is fitted with a flex and plug. Secondary side is fitted with a quick connect socket. Fixture is fitted with a long tail and quick connect plug
- Suitable for ceiling thickness up to 30mm
- 50,000hr rated life




h (m)	Offset	Cone Width	Illuminance
0.33m			2947
0.65m			737
0.98m			327
1.31m			184
1.63m			118
1.96m			82

DECCA

Order Code	10W 800lm	3000k	Dimming	White Trim
1816934	•	•	•	•
1816934D	•	•	•	•

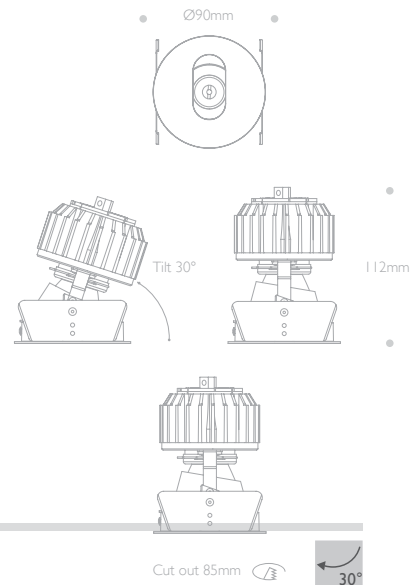

APPLICATIONS RETAIL / OFFICES / HOTEL & LEISURE / EDUCATIONAL / PUBLIC BUILDINGS / RESIDENTIAL / HEALTHCARE



LED



Decca




DECCA CLOSED CONE 90

Decca combines all that is required for a simple yet effective architectural lighting design solution with freedom from compromise.

It encompasses most lighting fundamentals to allow continuity in the overall design process without impacting on performance or appearance.


Features

- Available LED colour temperature 3000k
- 3000k 13w 850lm
- 43° beam distribution
- Low glare spill ring
- Enclosed LED IP44
- One of a family of 3 trim sizes including IP54 and wall wash versions
- Die cast aluminium trim stoved powder coated white finish
- Available with Non dim & Dimmable – Dimmable DALi 1-10v & push to dim (PTD)
- Tool less plug and play format. Driver – mains side, is fitted with a flex and plug. Secondary side is fitted with a quick connect socket. Fixture is fitted with a long tail and quick connect plug
- Suitable for ceiling thickness up to 30mm
- 50,000hr rated life

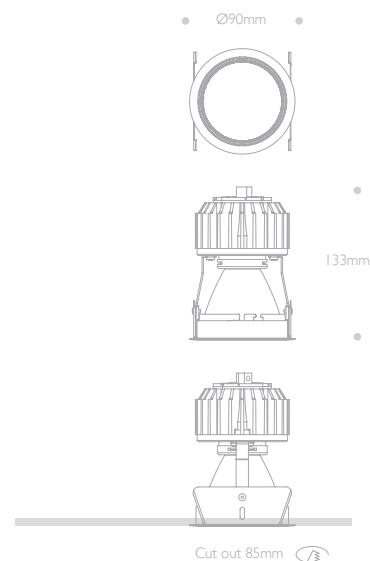

DECCA

Order Code	13W 850lm	3000k	Dimming	White Trim
1816734	•	•		•
1816734D	•	•	•	•

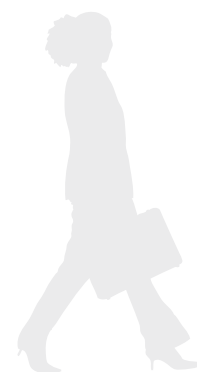

• APPLICATIONS RETAIL / OFFICES / HOTEL & LEISURE / EDUCATIONAL / PUBLIC BUILDINGS / RESIDENTIAL / HEALTHCARE





Decca

DECCA CLOSED CONE 135

Decca combines all that is required for a simple yet effective architectural lighting design solution with freedom from compromise. It encompasses most lighting fundamentals to allow continuity in the overall design process without impacting on performance or appearance.

Features

- Available LED colour temperature 3000k & 4000k
- 3000k 24w 1360lm
- 4000k 24w 1610lm
- 51° beam distribution
- Low glare spill ring
- Enclosed LED IP44
- One of a family of 3 trim sizes including IP54 and wall wash versions
- Die cast aluminium trim stoved powder coated white finish
- Available with Non dim & Dimmable – Dimmable DALi 1-10v & push to dim (PTD)
- Tool less plug and play format. Driver – mains side, is fitted with a flex and plug. Secondary side is fitted with a quick connect socket. Fixture is fitted with a long tail and quick connect plug
- Suitable for ceiling thickness up to 30mm
- 50,000hr rated life

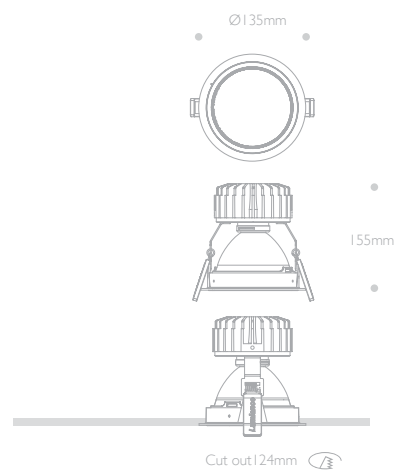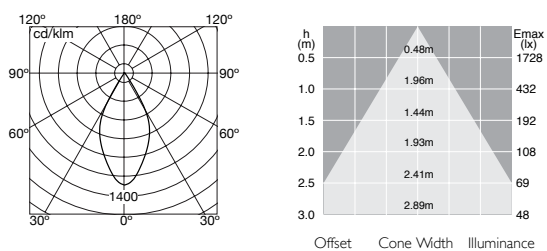

DECCA

Order Code	24W 1360lm	24W 1610lm	3000k	4000k	Dimming	White Trim
1816534	•		•			•
1816544		•		•		•
1816534D	•		•		•	•
1816544D		•		•	•	•



APPLICATIONS RETAIL / OFFICES / HOTEL & LEISURE / EDUCATIONAL / PUBLIC BUILDINGS / RESIDENTIAL / HEALTHCARE



LED



Decca




DECCA IP54 III

Decca combines all that is required for a simple yet effective architectural lighting design solution with freedom from compromise.

It encompasses most lighting fundamentals to allow continuity in the overall design process without impacting on performance or appearance.

Features

- Available LED colour temperature 3000k
- 3000k 13w 850lm
- 50° beam distribution
- Front glass gasket IP54
- One of a family of 3 trim sizes including IP54 and wall wash versions
- Die cast aluminium trim stoved powder coated white finish
- Available with Non dim & Dimmable – Dimmable DALi I-I0v & push to dim (PTD)
- Tool less plug and play format. Driver – mains side, is fitted with a flex and plug. Secondary side is fitted with a quick connect socket. Fixture is fitted with a long tail and quick connect plug
- Suitable for ceiling thickness up to 30mm
- 50,000hr rated life

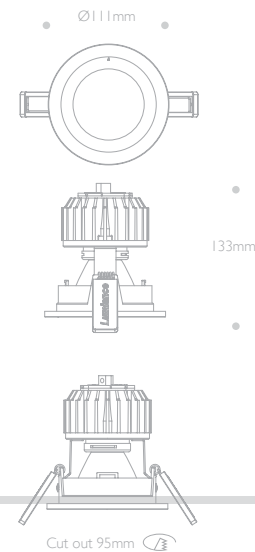

DECCA

Order Code	13W 850lm	3000k	Dimming	White Trim
I817334	•	•		•
I817334D	•	•	•	•



APPLICATIONS RETAIL / OFFICES / HOTEL & LEISURE / EDUCATIONAL / PUBLIC BUILDINGS / RESIDENTIAL / HEALTHCARE



LED



Decca




DECCA IP54 138

Decca combines all that is required for a simple yet effective architectural lighting design solution with freedom from compromise.

It encompasses most lighting fundamentals to allow continuity in the overall design process without impacting on performance or appearance.

Features

- Available LED colour temperature 3000k & 4000k
- 3000k 24w 1360lm
- 4000k 24w 1610lm
- 55° beam distribution
- Front glass gasket IP54
- One of a family of 3 trim sizes including IP54 and wall wash versions
- Die cast aluminium trim stoved powder coated white finish
- Available with Non dim & Dimmable – Dimmable DALi I-10v & push to dim (PTD)
- Tool less plug and play format. Driver – mains side, is fitted with a flex and plug. Secondary side is fitted with a quick connect socket. Fixture is fitted with a long tail and quick connect plug
- Suitable for ceiling thickness up to 30mm
- 50,000hr rated life

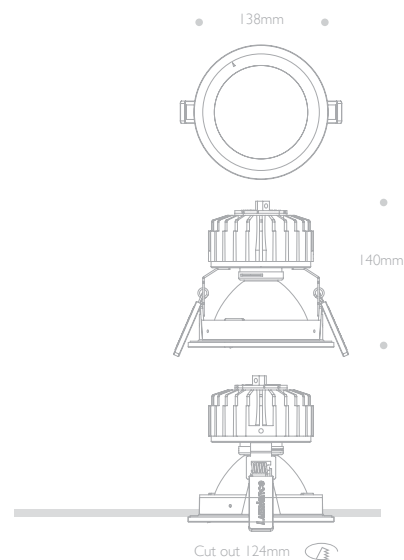

DECCA

Order Code	24W 1360lm	24W 1610lm	3000k	4000k	Dimming	White Trim
1817234	•	•	•	•	•	•
1817244	•	•	•	•	•	•
1817234D	•	•	•	•	•	•
1817244D	•	•	•	•	•	•



APPLICATIONS RETAIL / OFFICES / HOTEL & LEISURE / EDUCATIONAL / PUBLIC BUILDINGS / RESIDENTIAL / HEALTHCARE



LED






Decca

DECCA OPEN CONE 90

Decca combines all that is required for a simple yet effective architectural lighting design solution with freedom from compromise. It encompasses most lighting fundamentals to allow continuity in the overall design process without impacting on performance or appearance.

Features

- Available LED colour temperature 3000k
- 3000k 13w 850lm
- 43° beam distribution
- Enclosed LED IP44
- One of a family of 3 trim sizes including IP54 and wall wash versions
- Die cast aluminium trim stoved powder coated white finish
- Available with Non dim & Dimmable – Dimmable DALi I-10v & push to dim (PTD)
- Tool less plug and play format. Driver – mains side, is fitted with a flex and plug. Secondary side is fitted with a quick connect socket. Fixture is fitted with a long tail and quick connect plug
- Suitable for ceiling thickness up to 30mm
- 50,000hr rated life

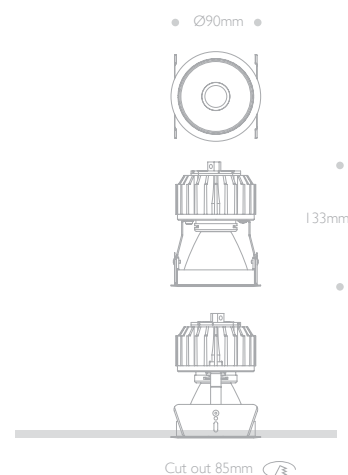

DECCA

Order Code	13W 850lm	3000k	Dimming	White Trim
1816634	•	•	•	•
1816634D	•	•	•	•



• APPLICATIONS RETAIL / OFFICES / HOTEL & LEISURE / EDUCATIONAL / PUBLIC BUILDINGS / RESIDENTIAL / HEALTHCARE



LED



Decca



DECCA OPEN CONE 108

Decca combines all that is required for a simple yet effective architectural lighting design solution with freedom from compromise.

It encompasses most lighting fundamentals to allow continuity in the overall design process without impacting on performance or appearance.

Features

- Available LED colour temperature 3000k
- 3000k 13w 850lm
- 41° beam distribution
- Enclosed LED IP44
- One of a family of 3 trim sizes including IP54 and wall wash versions
- Die cast aluminium trim stoved powder coated white finish
- Available with Non dim & Dimmable – Dimmable DALi 1-10v & push to dim (PTD)
- Tool less plug and play format. Driver – mains side, is fitted with a flex and plug. Secondary side is fitted with a quick connect socket. Fixture is fitted with a long tail and quick connect plug
- Suitable for ceiling thickness up to 30mm
- 50,000hr rated life

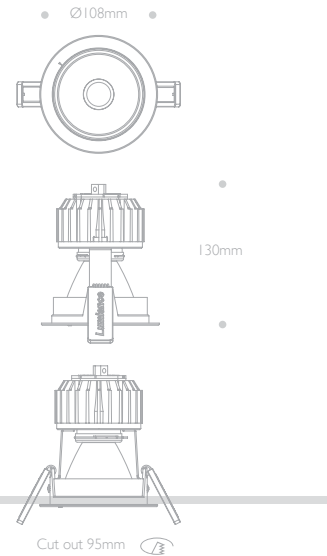

h (m)	Offset	Cone Width	Illuminance	Emax (lx)
0.37		0.37m		1738
0.74		0.74m		434
1.12		1.12m		193
1.49		1.49m		109
1.86		1.86m		70
2.23		2.23m		48

DECCA

Order Code	13W 850lm	3000k	Dimming	White Trim
1817134	•	•	•	•
1817134D	•	•	•	•



• APPLICATIONS RETAIL / OFFICES / HOTEL & LEISURE / EDUCATIONAL / PUBLIC BUILDINGS / RESIDENTIAL / HEALTHCARE



LED



Decca




DECCA OPEN CONE 135

Decca combines all that is required for a simple yet effective architectural lighting design solution with freedom from compromise.



It encompasses most lighting fundamentals to allow continuity in the overall design process without impacting on performance or appearance.

Features

- Available LED colour temperature 3000k & 4000k
- 3000k 24w 1360lm
- 4000k 24w 1610lm
- 46° beam distribution
- Enclosed LED IP44
- One of a family of 3 trim sizes including IP54 and wall wash versions
- Die cast aluminium trim stoved powder coated white finish
- Available with Non dim & Dimmable – Dimmable DALI 1-10v & push to dim (PTD)
- Tool less plug and play format. Driver – mains side, is fitted with a flex and plug. Secondary side is fitted with a quick connect socket. Fixture is fitted with a long tail and quick connect plug
- Suitable for ceiling thickness up to 30mm
- 50,000hr rated life



Cut out 124mm



DECCA

Order Code	24W 1360lm	24W 1610lm	3000k	4000k	Dimming	White Trim
1817034	•		•			•
1817044		•		•		•
1817034D	•		•		•	•
1817044D		•		•	•	•



APPLICATIONS RETAIL / OFFICES / HOTEL & LEISURE / EDUCATIONAL / PUBLIC BUILDINGS / RESIDENTIAL / HEALTHCARE



LED



Decca




DECCA ADJUSTABLE WALL WASHER 108

Decca combines all that is required for a simple yet effective architectural lighting design solution with freedom from compromise.

It encompasses most lighting fundamentals to allow continuity in the overall design process without impacting on performance or appearance.

Features

- Available LED colour temperature 3000k
- 3000k 13w 850lm
- Wall washer
- Tilt 30° and rotate 355°
- Symmetrical glass IP44. Optional Elongation lens accessory available
- One of a family of 3 trim sizes including IP54 and wall wash versions
- Die cast aluminium trim stoved powder coated white finish
- Available with Non dim & Dimmable – Dimmable DALi 1-10v & push to dim (PTD)
- Tool less plug and play format. Driver – mains side, is fitted with a flex and plug. Secondary side is fitted with a quick connect socket. Fixture is fitted with a long tail and quick connect plug
- Suitable for ceiling thickness up to 30mm
- 50,000hr rated life

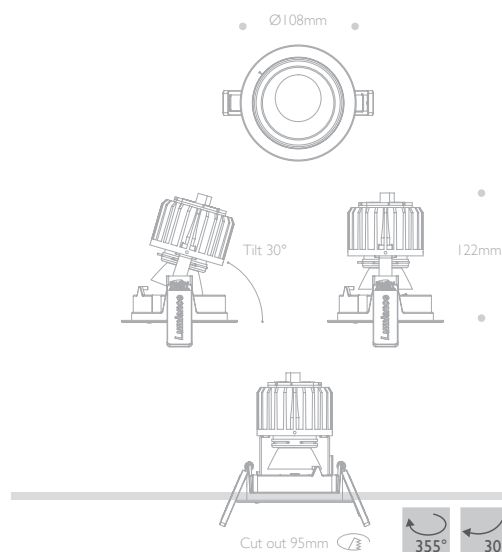

DECCA

Order Code	13W 850lm	3000k	Dimming	White Trim
1817534	•	•	•	•
1817534D	•	•	•	•



APPLICATIONS RETAIL / OFFICES / HOTEL & LEISURE / EDUCATIONAL / PUBLIC BUILDINGS / RESIDENTIAL / HEALTHCARE



LED



Decca





DECCA ADJUSTABLE WALL WASHER 135

Decca combines all that is required for a simple yet effective architectural lighting design solution with freedom from compromise.

It encompasses most lighting fundamentals to allow continuity in the overall design process without impacting on performance or appearance.

Features

- Available LED colour temperature 3000k & 4000k
- 3000k 24w 1360lm
- 4000k 24w 1610lm
- Wall washer
- Tilt 30° and rotate 355°
- Symmetrical glass IP44. Optional Elongation lens accessory available
- One of a family of 3 trim sizes including IP54 and wall wash versions
- Die cast aluminium trim stoved powder coated white finish
- Available with Non dim & Dimmable – Dimmable DALi 1-10v & push to dim (PTD)
- Tool less plug and play format. Driver – mains side, is fitted with a flex and plug. Secondary side is fitted with a quick connect socket. Fixture is fitted with a long tail and quick connect plug
- Suitable for ceiling thickness up to 30mm
- 50,000hr rated life



Cut out 124mm



DECCA

Order Code	24W 1360lm	24W 1610lm	3000k	4000k	Dimming	White Trim
1817434	•		•			•
1817444		•		•		•
1817434D	•		•		•	•
1817444D		•		•	•	•



• APPLICATIONS RETAIL / OFFICES / HOTEL & LEISURE / EDUCATIONAL / PUBLIC BUILDINGS / RESIDENTIAL / HEALTHCARE





DIALux

Autodesk Revit

SLA Australian Customer Service Centres:

HEADQUARTERS

Sylvania Lighting
Australasia Pty Ltd
ACN: 000 534 243 ABN: 81 000 534 243
Sylvania Way
(Locked Bag 9, Gosford)
Lisarow NSW 2250 Australia
Phone: 02 4328 0600
Fax: 02 4328 2605

Phone: 1300 728 988
Fax: 1300 728 844
Email: sylvania@sla.net.au

CENTRAL REGION

NEW SOUTH WALES
Sylvania Lighting
Australasia Pty Ltd
Suite 1C, 69 Waterloo Road
North Ryde NSW 2113
Phone: 02 8873 0000
Fax: 02 8873 0001

Phone: 1300 728 988
Fax: 1300 728 844
Email: slansw@sla.net.au

NEWCASTLE

Stramac Pty Ltd
10-12 Union Street
Wickham NSW 2293
Phone: 02 4969 6555
Fax: 02 4962 2457
Email: stramac@bigpond.com.au

NORTHERN REGION

QUEENSLAND
Sylvania Lighting
Australasia Pty Ltd
25 Donkin Street
West End QLD 4101
Phone: 07 3034 8600
Fax: 07 3846 3689
Email: slaqlid@sla.net.au

NORTHERN QUEENSLAND
JEM Distributors Pty Ltd
2/37 Mackley Street
Garbutt, Townsville QLD 4814
Phone: 07 4775 6299
Fax: 07 4725 1191
Email: slaqlid@sla.net.au

NORTHERN TERRITORY
Gerard Lighting Group Ltd
20 Bishop Street
Woolner NT 0820
Phone: 08 8941 2225
Fax: 08 8941 2223
Email: slant@sla.net.au

SOUTHERN REGION

VICTORIA
Sylvania Lighting
Australasia Pty Ltd
Riverview Business Park
87 Moreland Street
Footscray VIC 3011
Phone: 03 9689 7833
Fax: 03 9689 5611
Email: slavic@sla.net.au

SOUTH AUSTRALIA
Sylvania Lighting
Australasia Pty Ltd
101 Port Wakefield Road
Cavan SA 5094
Ph: 08 8139 7378
Freecall: 1800 248 241
Freefax: 1800 648 641
Email: slasa@sla.net.au

TASMANIA

Sylvania Lighting
Australasia Pty Ltd
Riverview Business Park
87 Moreland Street
Footscray VIC 3011
Phone: 1300 519 796
Fax: 1300 841 796
Email: slatas@sla.net.au

WESTERN REGION

WESTERN AUSTRALIA
Sylvania Lighting
Australasia Pty Ltd
77 Truganina Road
Malaga WA 6090
Phone: 08 9249 2890
Fax: 08 9249 8160
Email: slawa@sla.net.au

A Division of the Gerard Group: