


Lumiance

JAX RANGE





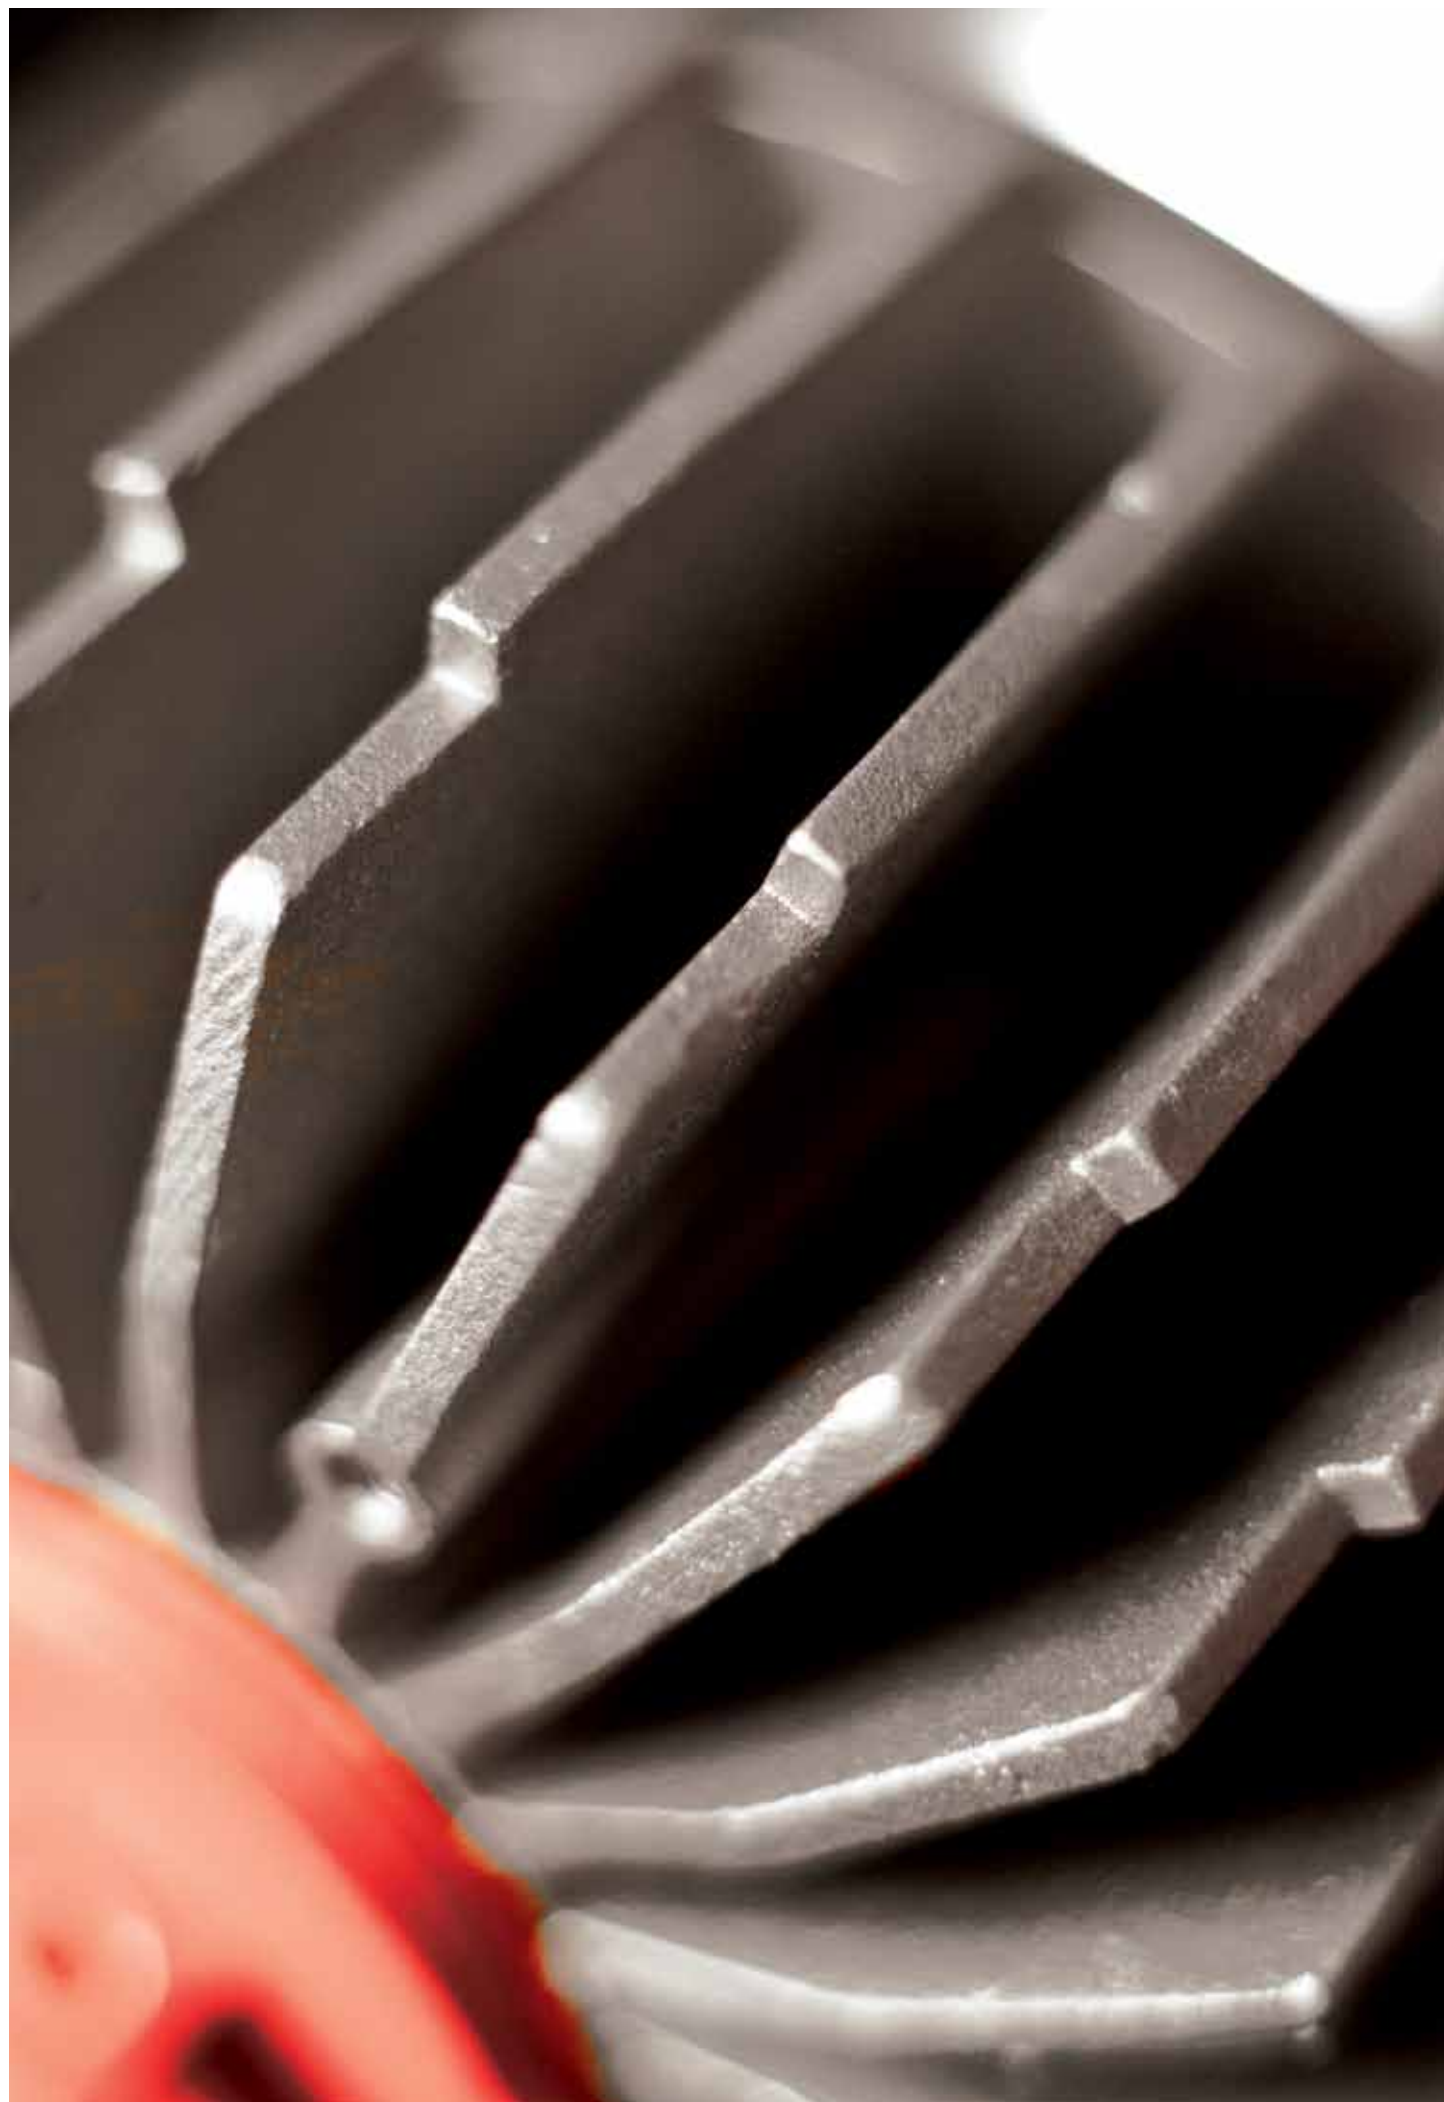

LED



Jax

JAX 134




Jax combines a unique blend of form and function by providing lighting designers with extremely versatile luminaires and the ultimate in efficient performance.

The combination of 'smooth and easy' tilt and rotational control coupled with a sleek rebated bezel work together in harmony to reduce glare. A further appealing feature is the tracking eyelid which blocks any sight line into the mounted void when rotated and tilted to any position.

Jax continues the Lumiance design fundamentals of 'tool less' installation.

Features

- Available LED colour temperature 3000k
- 3000k 13w 850lm
- 45° beam distribution
- 'smooth and easy' tiltable to 30° from the horizontal with a 355° rotation
- Tracking eyelid
- Reduced glare
- Enclosed protective front glass IP44
- One of a family of 4 trim sizes including twin mounted and 2 wattage options
- Available with Non dim & Dimmable – Dimmable DALi 1-10v & push to dim (PTD)
- Tool less plug and play format. Driver – mains side, is fitted with a flex and plug. Secondary side is fitted with a quick connect socket. Fixture is fitted with a long tail and quick connect plug
- Suitable for ceiling thickness up to 30mm
- 50,000hr rated life

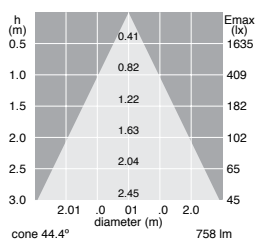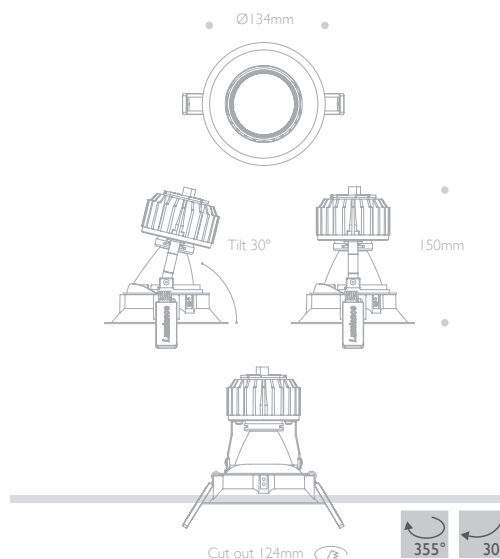

JAX

Order Code	13W 850lm	3000k	Dimming	White Trim
1817834	•			•
1817834D	•		•	•



APPLICATIONS RETAIL / OFFICES / HOTEL & LEISURE / EDUCATIONAL / PUBLIC BUILDINGS / RESIDENTIAL / HEALTHCARE



LED



Jax

JAX 264




Jax combines a unique blend of form and function by providing lighting designers with extremely versatile luminaires and the ultimate in efficient performance.

The combination of 'smooth and easy' tilt and rotational control coupled with a sleek rebated bezel work together in harmony to reduce glare. A further appealing feature is the tracking eyelid which blocks any sight line into the mounted void when rotated and tilted to any position

Jax continues the Lumiance design fundamentals of 'tool less' installation.

Features

- Available LED colour temperature 3000k
- 2 x 3000k 13w 850lm (26w 1700lm)
- 2 x 45° beam distribution
- 2 x 'smooth and easy' tiltable to 30° from the horizontal with a 355° rotation
- Tracking eyelid
- Reduced glare
- Enclosed protective front glass IP44
- One of a family of 4 trim sizes including twin mounted and 2 wattage options
- Available with Non dim & Dimmable – Dimmable DALi 1-10v & push to dim (PTD)
- Tool less plug and play format. Driver – mains side, is fitted with a flex and plug. Secondary side is fitted with a quick connect socket. Fixture is fitted with a long tail and quick connect plug
- Suitable for ceiling thickness up to 30mm
- 50,000hr rated life

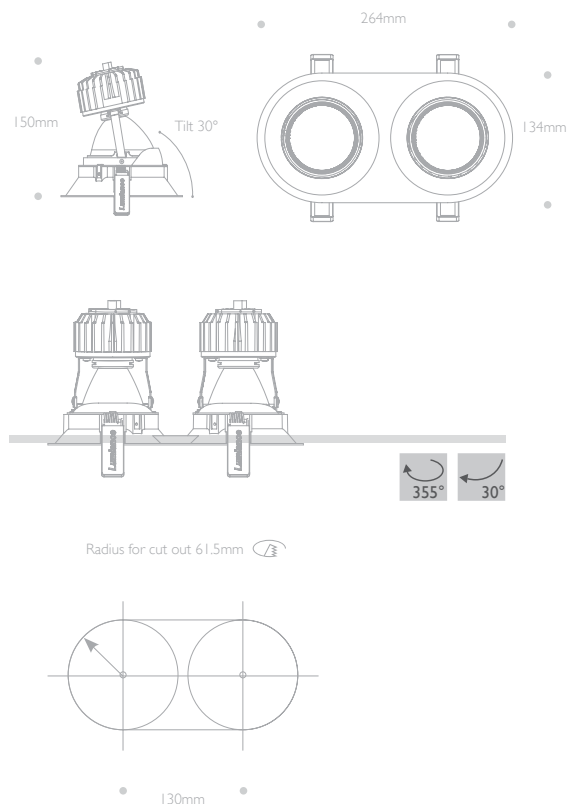

JAX


Order Code	2x13W 850lm	2x 3000k	2x Dimming	White Trim
1817934	•	•	•	•
1817934D	•	•	•	•



• APPLICATIONS RETAIL / OFFICES / HOTEL & LEISURE / EDUCATIONAL / PUBLIC BUILDINGS / RESIDENTIAL / HEALTHCARE



LED



Jax

JAX 186




Jax combines a unique blend of form and function by providing lighting designers with extremely versatile luminaires and the ultimate in efficient performance.

The combination of 'smooth and easy' tilt and rotational control coupled with a sleek rebated bezel work together in harmony to reduce glare. A further appealing feature is the tracking eyelid which blocks any sight line into the mounted void when rotated and tilted to any position.

Jax continues the Lumiance design fundamentals of 'tool less' installation.

Features

- Available LED colour temperature 3000k & 4000k
- 3000k 24w 1360lm
- 4000k 24w 1610lm
- 50° beam distribution
- 'smooth and easy' tiltable to 30° from the horizontal with a 355° rotation
- Tracking eyelid
- Reduced glare
- Enclosed protective front glass IP44
- One of a family of 4 trim sizes including twin mounted and 2 wattage options
- Polycarbonate trim and mandrel in white finish
- Available with Non dim & Dimmable – Dimmable DALi I-10v & push to dim (PTD)
- Tool less plug and play format. Driver – mains side, is fitted with a flex and plug. Secondary side is fitted with a quick connect socket. Fixture is fitted with a long tail and quick connect plug
- Suitable for ceiling thickness up to 30mm
- 50,000hr rated life

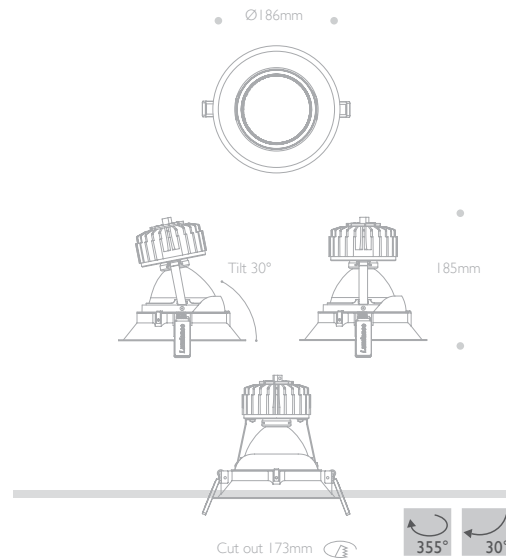



LED



Jax

JAX 367




Jax combines a unique blend of form and function by providing lighting designers with extremely versatile luminaires and the ultimate in efficient performance.

The combination of 'smooth and easy' tilt and rotational control coupled with a sleek rebated bezel work together in harmony to reduce glare. A further appealing feature is the tracking eyelid which blocks any sight line into the mounted void when rotated and tilted to any position

Jax continues the Lumiance design fundamentals of 'tool less' installation.

Features

- Available LED colour temperature 3000k & 4000k
- 2 x 3000k 24w 1360lm (48w 2720lm)
- 2 x 4000k 24w 1610lm (48w 3220lm)
- 2 x 50° beam distribution
- 'Smooth and easy' tiltable to 30° from the horizontal with a 355° rotation
- Tracking eyelid
- Reduced glare
- Enclosed protective front glass IP44
- One of a family of 4 trim sizes including twin mounted and 2 wattage options
- Polycarbonate trim and mandrel in white finish
- Available with Non dim & Dimmable – Dimmable DALi 1-10v & push to dim (PTD)
- Tool less plug and play format. Driver – mains side, is fitted with a flex and plug. Secondary side is fitted with a quick connect socket. Fixture is fitted with a long tail and quick connect plug
- Suitable for ceiling thickness up to 30mm
- 50,000hr rated life

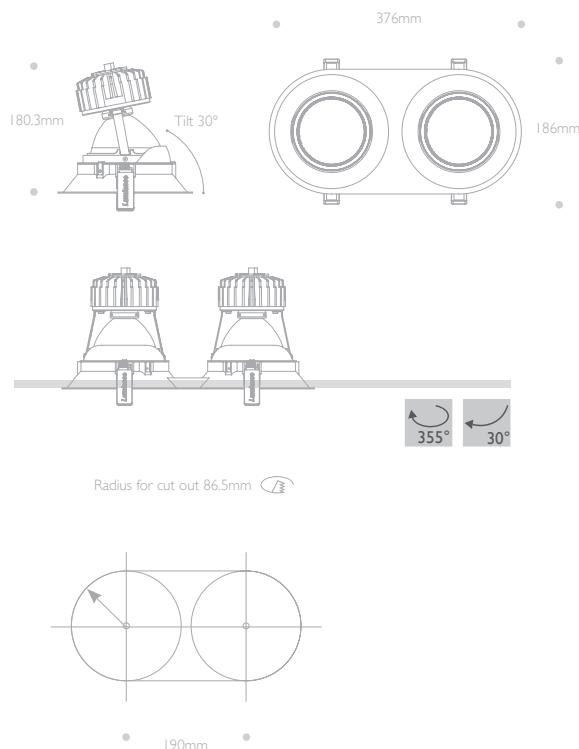





DIALux

Autodesk Revit

SLA Australian Customer Service Centres:

HEADQUARTERS

Sylvania Lighting
Australasia Pty Ltd
ACN: 000 534 243 ABN: 81 000 534 243
Sylvania Way
(Locked Bag 9, Gosford)
Lisarow NSW 2250 Australia
Phone: 02 4328 0600
Fax: 02 4328 2605

Phone: 1300 728 988
Fax: 1300 728 844
Email: sylvania@sla.net.au

CENTRAL REGION

NEW SOUTH WALES
Sylvania Lighting
Australasia Pty Ltd
Suite 1C, 69 Waterloo Road
North Ryde NSW 2113
Phone: 02 8873 0000
Fax: 02 8873 0001

Phone: 1300 728 988
Fax: 1300 728 844
Email: slansw@sla.net.au

NEWCASTLE

Stramac Pty Ltd
10-12 Union Street
Wickham NSW 2293
Phone: 02 4969 6555
Fax: 02 4962 2457
Email: stramac@bigpond.com.au

NORTHERN REGION

QUEENSLAND
Sylvania Lighting
Australasia Pty Ltd
25 Donkin Street
West End QLD 4101
Phone: 07 3034 8600
Fax: 07 3846 3689
Email: slaqlid@sla.net.au

NORTHERN QUEENSLAND
JEM Distributors Pty Ltd
2/37 Mackley Street
Garbutt, Townsville QLD 4814
Phone: 07 4775 6299
Fax: 07 4725 1191
Email: slaqlid@sla.net.au

NORTHERN TERRITORY
Gerard Lighting Group Ltd
20 Bishop Street
Woolner NT 0820
Phone: 08 8941 2225
Fax: 08 8941 2223
Email: slant@sla.net.au

SOUTHERN REGION

VICTORIA
Sylvania Lighting
Australasia Pty Ltd
Riverview Business Park
87 Moreland Street
Footscray VIC 3011
Phone: 03 9689 7833
Fax: 03 9689 5611
Email: slavic@sla.net.au

SOUTH AUSTRALIA
Sylvania Lighting
Australasia Pty Ltd
101 Port Wakefield Road
Cavan SA 5094
Ph: 08 8139 7378
Freecall: 1800 248 241
Freefax: 1800 648 641
Email: slasa@sla.net.au

TASMANIA

Sylvania Lighting
Australasia Pty Ltd
Riverview Business Park
87 Moreland Street
Footscray VIC 3011
Phone: 1300 519 796
Fax: 1300 841 796
Email: slatas@sla.net.au

WESTERN REGION

WESTERN AUSTRALIA
Sylvania Lighting
Australasia Pty Ltd
77 Truganina Road
Malaga WA 6090
Phone: 08 9249 2890
Fax: 08 9249 8160
Email: slawa@sla.net.au