



## LED/LEP



Ultra Midi LED  
Page 17



Ilia Maxi LED  
Page 15



Ilia Midi LED  
Page 13



Ilia Minor LED  
Page 11



A2 Midi LED  
Page 9




A2 Mini LED  
Page 8



R1/R2 Micro  
LED  
Page 7




Cardinal LEP  
Highbay  
Page 6




DL10 Series  
Page 31



Alto LED  
Page 30



Rokast LED  
Series  
Page 29



Lineales U LED  
Page 27



Lineales S LED  
Page 25



Lineales E LED  
Page 23



Aqua LED Series  
Page 21



Ultra Maxi LED  
Page 19



DL20  
Page 37



City Light Bollard  
LED  
Page 35



Lantern LED  
Page 34



City Light  
Elegance LED  
Page 33



City Light Plus LED  
Page 32

# CARDINAL LEP HIGHBAY **NEW**



## LEP HIGHBAY


The Cardinal LEP Highbay features cutting edge Light Emitting Plasma technology. The LEP is an extremely compact light source with high lumen output which allows for precise optical design delivering excellent luminaire efficiency with a total system power consumption of 280W.

## LUMINAIRE CONSTRUCTION


- Cast and extruded aluminium body
- High transmission tempered glass lens
- High grade aluminium reflector system
- Integral control gear
- 2 lamp type options
  - 23,000 lm, CRI 75, 5,700K
  - 17,000 lm, CRI 95, 5600K

## FEATURES

- Exceptional Light Output Ratio
- Dimming capabilities
- Symmetric distribution
- 240V mains volt supply
- 45 seconds to full lamp output
- 2 minutes to full lamp output for hot-restrike
- Replaceable lamp housing
- 50,000 hour lamp life
- 10kv surge protection
- Powdercoat finish in silver

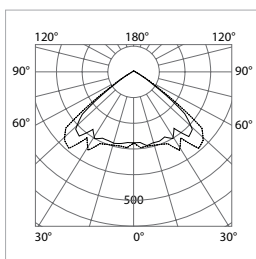


Cardinal LEP Highbay  
—C0 - C180    ---C90 - C270

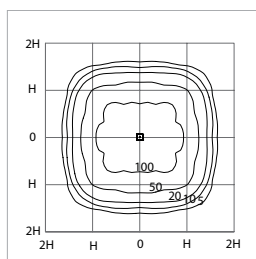

Cardinal LEP Highbay  
H = 6m

| H   | Multiplier |
|-----|------------|
| 5.0 | 1.44       |
| 6.0 | 1.00       |
| 7.0 | 0.73       |

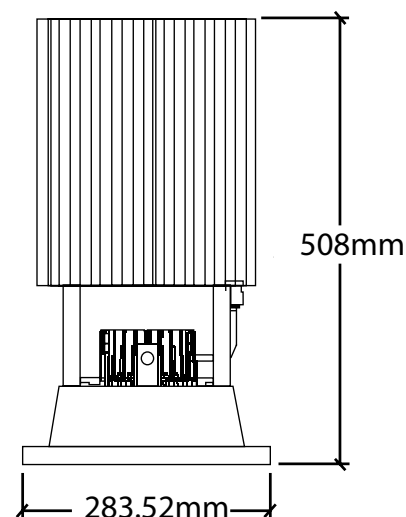

CARDINAL LEP HIGHBAY

**iReady**



| Description        | Lumens | CRI | Temperature | Weight  |
|--------------------|--------|-----|-------------|---------|
| Cardinal LEP 41-01 | 23,000 | 75  | 5,700K      | 12.20kg |
| Cardinal LEP 41-02 | 17,000 | 95  | 5,600K      | 12.20kg |

# R1/R2 MICRO LED NEW



## PROJECTOR FOR LED

The R1/R2 Micro LED is an extremely compact and unobtrusive symmetric projector ideal for spotlighting features. The luminaire features 1x10W LED with option for either trunnion or rotational base mounting system.

## LUMINAIRE CONSTRUCTION

- Housing made of die-cast aluminium
- Surface powder coated in Siteco metallic grey DB702S
- Die-cast aluminium rotational base mount or aluminium trunnion
- Tempered flat glass enclosure

## FEATURES

- Stainless steel trunnion option
- Minimised power consumption
- CRI >80
- Mains volt supply
- 50,000 hour 10W LED



R1 Micro LED




R2 Micro LED

## R1/R2 MICRO LED


**iReady**



| Description          | Lamp      | Colour     | Weight | Order Code    |
|----------------------|-----------|------------|--------|---------------|
| R1 Micro 1x10 LED CW | 1x10W LED | Cool White | 1.8kg  | 5NY72171LC008 |
| R2 Micro 1x10 LED CW | 1x10W LED | Cool White | 1.8kg  | 5NY72171LC108 |
| R1 Micro 1x10 LED WW | 1x10W LED | Warm White | 1.8kg  | 5NY72171LW008 |
| R2 Micro 1x10 LED WW | 1x10W LED | Warm White | 1.8kg  | 5NY72171LW108 |

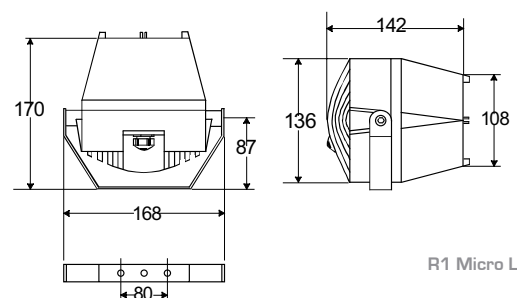

R1 Micro LED

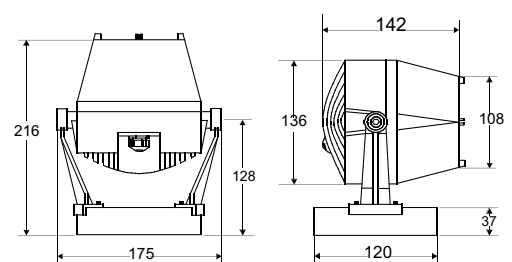

R2 Micro LED

# A2 MINI LED NEW



## LED FLOODLIGHT



The A2 Mini LED is a high quality flat glass side throw luminaire ideal for a wide range of applications whereby precise beam control, low glare and minimal spill is required. The luminaire features twin 12 LED module systems for optimised performance providing total power consumption of 43W.

## LUMINAIRE CONSTRUCTION


- Die-Cast aluminium housing
- Silicon gasket system
- Flat safety glass cover
- Zinc plated steel trunnion or pole mount adaptors (suit 76mm spigot)
- Powdercoat finish in Siteco metallic grey DB702S

## FEATURES

- 24 LEDs providing long life
- 4800K
- Luminous flux 2200 lm
- Control option for 100%/50% output
- Luminaire includes 6 MT of fitted cable
- CRI >80
- Mains volt supply
- 50,000 hour LED lamp life

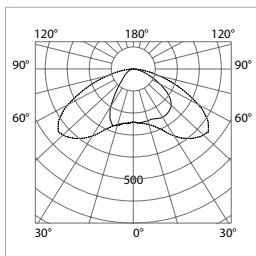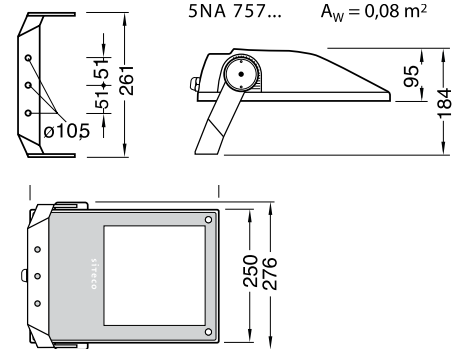

A2 Mini LED 43W  
— C0 - C180    - - - C90 - C270

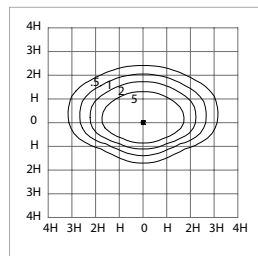

A2 Mini LED 43W  
H = 4.5m

| H   | Multiplier |
|-----|------------|
| 4.0 | 1.27       |
| 4.5 | 1.00       |
| 5.0 | 0.81       |
| 5.5 | 0.68       |

## A2 MINI LED

**iReady**



| Description                 | Lamp     | Colour | Weight | Order Code     |
|-----------------------------|----------|--------|--------|----------------|
| A2 Mini 24 LED Trunnion     | 24x 1.5W | 4800 K | 5.0kg  | 5XA7577LNA008  |
| A2 Mini 24 LED No Mount     | 24x 1.5W | 4800 K | 4.8kg  | 5XA7577LNA208  |
| A2 Mini Single Mast Adaptor |          | -      | -      | 5NY75701XA2108 |
| A2 Mini Twin Mast Adaptor   |          | -      | -      | 5NY75702XA2108 |



## LED FLOODLIGHT

The A2 Midi LED is a high quality flat glass side throw luminaire ideal for a wide range of applications whereby precise beam control, low glare and minimal spill is required. The luminaire features 84 LEDs with oval flood lenses providing total power consumption of 103W.

## LUMINAIRE CONSTRUCTION





- Die-cast aluminium housing
- Silicon gasket system
- Flat safety glass cover
- Zinc plated steel trunnion or pole mount adaptors
- Powder coated finish in Siteco metallic grey DB702S

## FEATURES


- 84 LEDs providing long life
- 4800K
- Luminous flux 6200 lm
- Luminaire includes 8MT of fitted cable
- CRI >80
- Mains volt supply
- 50,000 hour LED lamp life



5NA 758...  $A_w = 0,10 \text{ m}^2$

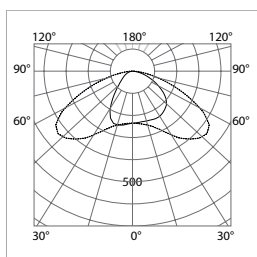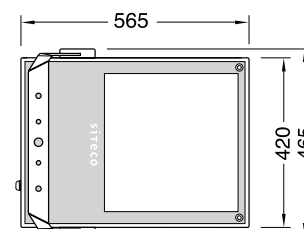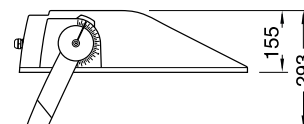

A2 Midi LED 103W  
— C0 - C180    - - - C90 - C270

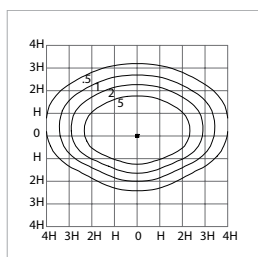

A2 Midi LED 103W  
H = 4.5m


| H   | Multiplier |
|-----|------------|
| 4.0 | 1.37       |
| 4.5 | 1.00       |
| 5.0 | 0.81       |
| 6.0 | 0.56       |

## A2 MIDI LED

**iReady**



| Description                      | Lamp     | Colour | Weight | Order Code     |
|----------------------------------|----------|--------|--------|----------------|
| A2 Midi 84 LED Trunnion          | 84x 1.1W | 4800 K | 17.5kg | 5XA7587BNT008  |
| A2 Midi 84 LED No Mount          | 84x 1.1W | 4800 K | 17.2kg | 5XA7507BNT208  |
| A2 Midi Single Mast Adaptor 76mm | -        | -      | -      | 5NY75801XA2108 |
| A2 Midi Twin Mast Adaptor 89mm   | -        | -      | -      | 5NY75802XA2108 |

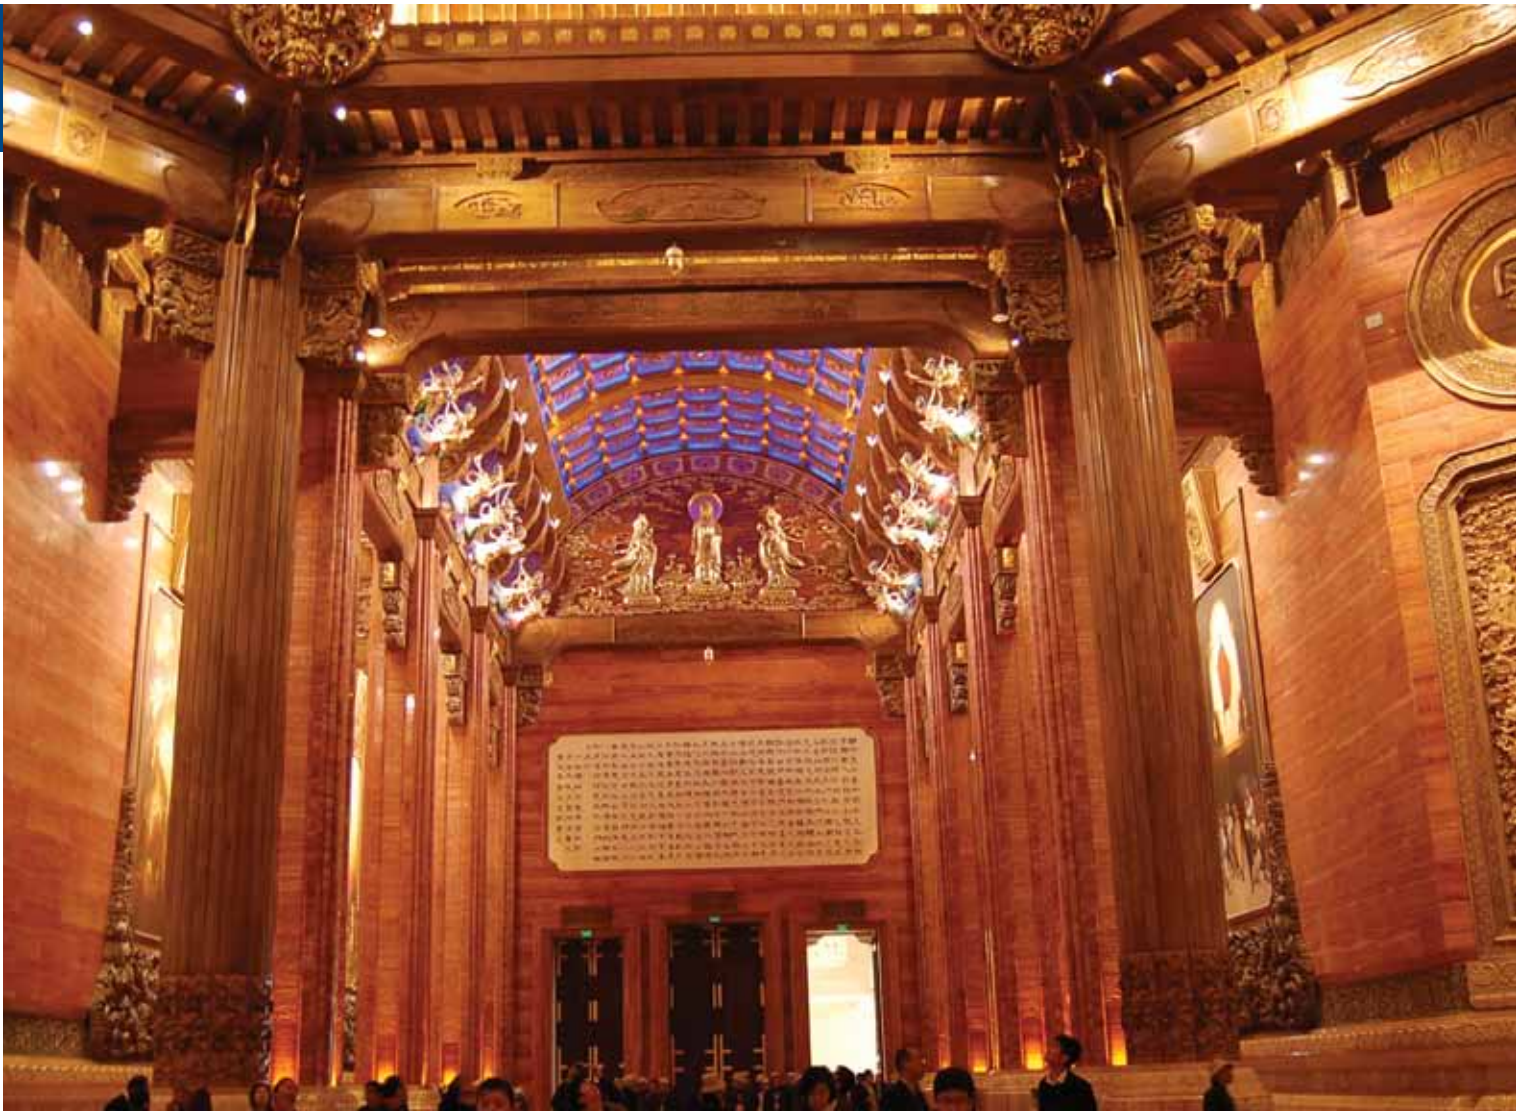



## ACCENT LED LUMINAIRE



The Ilia Minor is fully encapsulated in a stylish and rugged enclosure. Complying with IP66 makes this luminaire suitable for both indoor and outdoor wall washing or floodlighting applications. The luminaire offers a range of white, saturated colour or RGB in multiple beam options to provide suitable distribution for a wide range of requirements.

## LUMINAIRE CONSTRUCTION

- Die-cast aluminium
- Powdercoat finish in Aluminum grey
- 8mm tempered glass lens
- Silicon gasket system
- Weight - 3.8kg

## FEATURES

- High power 1W or 3W LEDs
- Lumileds as standard. Option for Cree or Osram
- Beam Options 8°, 15°, 20°, 25°, 40° or 60°
- Warm White app 3,000k, Natural White app 4,000k, White app 5,000k
- Red, Green, Blue, Amber and RGB options
- Multi rotational fixing system
- Surge protected control gear
- Integral control gear for 240V supply, allowing for ease of installation
- DMX compatible versions
- CRI >80
- 50,000 hour LED lamp life
- 3mtr cable as standard, other lengths on request
- Plug system options

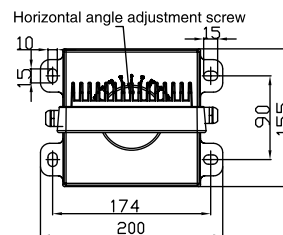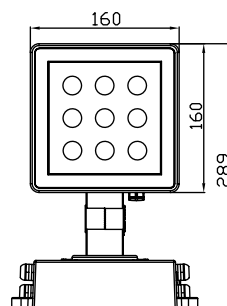

ILIA MINOR LED

iReady



| Description                        | Lamp | Colour                       | Weight | Order Code            |
|------------------------------------|------|------------------------------|--------|-----------------------|
| Ilia Minor 9x1 WW*                 | 9x1W | Warm White                   | 3.8kg  | IMR91WW*              |
| Ilia Minor 9x1 NW*                 | 9x1W | Natural White                | 3.8kg  | IMR91NW*              |
| Ilia Minor 9x1 WH*                 | 9x1W | White                        | 3.8kg  | IMR91WH*              |
| Ilia Minor 9x1 (R), (G), (B), (A)* | 9x1W | Red, Green, Blue, Amber      | 3.8kg  | IMR91(R),(G),(B),(A)* |
| Ilia Minor 9x1 RGB*                | 9x1W | Red (3), Green (3), Blue (3) | 3.8kg  | IMR91RGB*             |
| Ilia Minor 9x3 WW*                 | 9x3W | Warm White                   | 3.8kg  | IMR93WW*              |
| Ilia Minor 9x3 NW*                 | 9x3W | Natural White                | 3.8kg  | IMR93NW*              |
| Ilia Minor 9x3 WH*                 | 9x3W | White                        | 3.8kg  | IMR93WH*              |
| Ilia Minor 9x3 (R), (G), (B), (A)* | 9x3W | Red, Green, Blue, Amber      | 3.8kg  | IMR93(R),(G),(B),(A)* |
| Ilia Minor 9x3 RGB*                | 9x3W | Red (3), Green (3), Blue (3) | 3.8kg  | IMR93RGB*             |

\* Nominate beam widths as suffix : 8°, 15°, 20°, 25°, 40° or 60°

Note: WW= App 3,000k, NW= App 4,000K, WH= App 5,000K





## ACCENT LED LUMINAIRE



The Iliia Midi is fully encapsulated in a stylish and rugged enclosure. Complying with IP66 makes this luminaire suitable for both indoor and outdoor wall washing or floodlighting applications. The luminaire offers a range of white, saturated colour or RGB in multiple beam options to provide suitable distribution for a wide range of requirements.

## LUMINAIRE CONSTRUCTION

- Die-cast aluminium
- Powdercoat finish in Aluminum grey
- 8mm tempered glass lens
- Silicon gasket system
- Weight - 5.1kg

## FEATURES

- High power 1W or 3W LEDS
- Lumileds as standard. Option for Cree or Osram
- Beam Options 8°, 15°, 20°, 25°, 40° or 60°
- Warm White app 3,000k, Natural White app 4,000k, White app 5,000k
- Red, Green, Blue, Amber and RGB options
- Multi rotational fixing system
- Surge protected control gear
- Integral control gear for 240V supply, allowing for ease of installation
- DMX compatible versions
- CRI >80 for white versions
- 50,000 hour LED lamp life
- 3mtr cable as standard, other lengths on request
- Plug system options

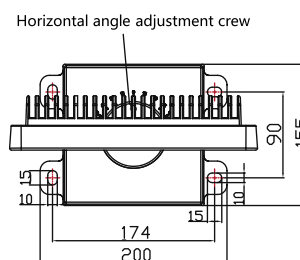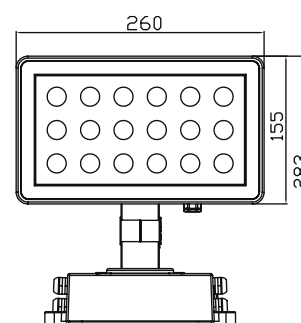

ILIA MIDI LED

**iReady**



| Description                         | Lamp  | Colour                       | Weight | Order Code              |
|-------------------------------------|-------|------------------------------|--------|-------------------------|
| Iliia Midi 18x3 WW*                 | 18x3W | Warm White                   | 5.1kg  | IMD183WW*               |
| Iliia Midi 18x3 NW*                 | 18x3W | Natural White                | 5.1kg  | IMD183NW*               |
| Iliia Midi 18x3 WH*                 | 18x3W | White                        | 5.1kg  | IMD183WH*               |
| Iliia Midi 18x3 (R), (G), (B), (A)* | 18x3W | Red, Green, Blue, Amber      | 5.1kg  | IMD183 (R),(G),(B),(A)* |
| Iliia Midi 18x3 RGB*                | 18x3W | Red (6), Green (6), Blue (6) | 5.1kg  | IMD183RGB*              |
| Iliia Midi 36x1 WW*                 | 36x1W | Warm White                   | 5.1kg  | IMD361WW*               |
| Iliia Midi 36x1 NW*                 | 36x1W | Natural White                | 5.1kg  | IMD361NW*               |
| Iliia Midi 36x1 WH*                 | 36x1W | White                        | 5.1kg  | IMD361WH*               |
| Iliia Midi 36x1 (R), (G), (B), (A)* | 36x1W | Red, Green, Blue, Amber      | 5.1kg  | IMD361 (R),(G),(B),(A)* |
| Iliia Midi 36x1 RGB*                | 36x1W | Red (3), Green (3), Blue (3) | 5.1kg  | IMD361RGB*              |

\* Nominate beam widths as suffix : 8°, 15°, 20°, 25°, 40° or 60°

Note: WW= App 3,000k, NW= App 4,000K, WH= App 5,000K





## ACCENT LED LUMINAIRE


The Ilia Maxi is fully encapsulated in a stylish and rugged enclosure. Complying with IP66 makes this luminaire suitable for both indoor and outdoor wall washing or floodlighting applications. The luminaire offers a range of white, saturated colour or RGB in multiple beam options to provide suitable distribution for a wide range of requirements.

## LUMINAIRE CONSTRUCTION

- Die-cast aluminium
- Powdercoat finish in Aluminum grey
- 8mm tempered glass lens
- Silicon gasket system
- Weight - 12.5kg


## FEATURES

- High power 1W or 3W LEDs
- Lumileds as standard. Option for Cree or Osram
- Beam Options 8°, 15°, 20°, 25°, 40° or 60°
- Warm White app 3,000k, Natural White app 4,000k, White app 5,000k
- Red, Green, Blue, Amber and RGB options
- Multi rotational fixing system
- Surge protected control gear
- Integral control gear for 240V supply, allowing for ease of installation
- DMX compatible versions
- CRI >80 for white versions
- 50,000 hour LED lamp life
- 3mtr cable as standard, other lengths on request
- Plug system options

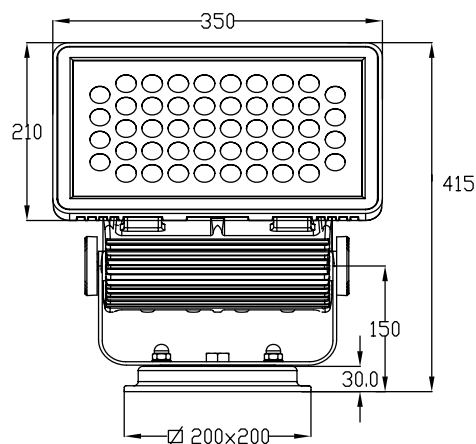

ILIA MAXI LED

iReady



| Description                        | Lamp  | Colour                          | Weight | Order Code             |
|------------------------------------|-------|---------------------------------|--------|------------------------|
| Ilia Maxi 48x1 WW*                 | 48x1W | Warm White                      | 12.5kg | IMX481WW*              |
| Ilia Maxi 48x1 NW*                 | 48x1W | Natural White                   | 12.5kg | IMX481NW*              |
| Ilia Maxi 48x1 WH*                 | 48x1W | White                           | 12.5kg | IMX481WH*              |
| Ilia Maxi 48x1 (R), (G), (B), (A)* | 48x1W | Red, Green, Blue, Amber         | 12.5kg | IMX481(R),(G),(B),(A)* |
| Ilia Maxi 48x1 RGB*                | 48x1W | Red (16), Green (16), Blue (16) | 12.5kg | IMX481RGB*             |
| Ilia Maxi 42x3 WW*                 | 42x3W | Warm White                      | 12.5kg | IMX423WW*              |
| Ilia Maxi 42x3 NW*                 | 42x3W | Natural White                   | 12.5kg | IMX423NW*              |
| Ilia Maxi 42x3 WH*                 | 42x3W | White                           | 12.5kg | IMX423WH*              |
| Ilia Maxi 42x3 (R), (G), (B), (A)* | 42x3W | Red, Green, Blue, Amber         | 12.5kg | IMX423(R),(G),(B),(A)* |
| Ilia Maxi 42x3 RGB*                | 42x3W | Red (16), Green (16), Blue (16) | 12.5kg | IMX423RGB*             |

\* Nominate beam widths as suffix : 8°, 15°, 20°, 25°, 40° or 60°

Note: WW= App 3,000k, NW= App 4,000K, WH= App 5,000K





## ACCENT LED LUMINAIRE


The Ultra Midi is fully encapsulated in a stylish and rugged enclosure. Complying with IP66 makes this luminaire suitable for both indoor and outdoor wall washing or floodlighting applications. The luminaire offers a range of white, saturated colour or RGB in multiple beam options to provide suitable distribution for a wide range of requirements.

## LUMINAIRE CONSTRUCTION

- Die-cast aluminium
- Powdercoat finish in Aluminum grey
- 8mm tempered glass lens
- Silicon gasket system
- Weight - 3.3kg


## FEATURES

- High power 1W LEDS
- Lumileds as standard. Option for Cree or Osram
- Beam Options 8°, 15°, 20°, 25°, 40° or 60°
- Warm White app 3,000k, Natural White app 4,000k, White app 5,000k
- Red, Green, Blue, Amber and RGB options
- Multi rotational fixing system
- Surge protected control gear
- Integral control gear for 240V supply, allowing for ease of installation
- DMX compatible versions
- CRI >80 for white versions
- 50,000 hour LED lamp life
- 3mtr cable as standard, other lengths on request
- Plug system options

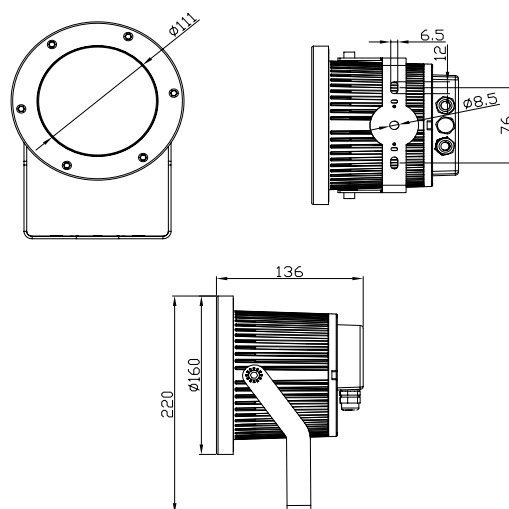

ULTRA MIDI LED

**iReady**



| Description                        | Lamp | Colour                       | Weight | Order Code            |
|------------------------------------|------|------------------------------|--------|-----------------------|
| Ultra Midi 9x1 WW*                 | 9x1W | Warm White                   | 3.3kg  | UMD91WW*              |
| Ultra Midi 9x1 NW*                 | 9x1W | Natural White                | 3.3kg  | UMD91NW*              |
| Ultra Midi 9x1 WH*                 | 9x1W | White                        | 3.3kg  | UMD91WH*              |
| Ultra Midi 9x1 (R), (G), (B), (A)* | 9x1W | Red, Green, Blue, Amber      | 3.3kg  | UMD91(R),(G),(B),(A)* |
| Ultra Midi 9x1 RGB*                | 9x1W | Red (3), Green (3), Blue (3) | 3.3kg  | UMD91RGB*             |

\* Nominate beam widths as suffix : 8°, 15°, 20°, 25°, 40° or 60°

Note: WW= App 3,000k, NW= App 4,000K, WH= App 5,000K





## ACCENT LED LUMINAIRE



The Ultra Maxi is fully encapsulated in a stylish and rugged enclosure. Complying with IP66 makes this luminaire suitable for both indoor and outdoor wall washing or floodlighting applications. The luminaire offers a range of white, saturated colour or RGB in multiple beam options to provide suitable distribution for a wide range of requirements.

## LUMINAIRE CONSTRUCTION

- Die-cast aluminium
- Powdercoat finish in Aluminum grey
- 8mm tempered glass lens
- Silicone gasket system
- Weight - 11.5kg


## FEATURES

- High power 1W or 3W LEDs
- Lumileds as standard. Option for Cree or Osram
- Beam Options 8°, 15°, 20°, 25°, 40° or 60°
- Warm White app 3,000k, Natural White app 4,000k, White app 5,000k
- Red, Green, Blue, Amber and RGB options
- Multi rotational fixing system
- Surge protected control gear
- Integral control gear for 240V supply, allowing for ease of installation
- DMX compatible versions
- CRI >80 for white versions
- 50,000 hour LED lamp life
- 3mtr cable as standard, other lengths on request
- Plug system options



## ULTRA MAXI LED

**iReady**



| Description                         | Lamp  | Colour                          | Weight | Weight                 |
|-------------------------------------|-------|---------------------------------|--------|------------------------|
| Ultra Maxi 30x1 WW*                 | 30x1W | Warm White                      | 11.5kg | UMX301WW*              |
| Ultra Maxi 30x1 NW*                 | 30x1W | Natural White                   | 11.5kg | UMX301NW*              |
| Ultra Maxi 30x1 WH*                 | 30x1W | White                           | 11.5kg | UMX301WH*              |
| Ultra Maxi 30x1 (R), (G), (B), (A)* | 30x1W | Red, Green, Blue, Amber         | 11.5kg | UMX301(R),(G),(B),(A)* |
| Ultra Maxi 30x1 RGB*                | 30x1W | Red (10), Green (10), Blue (10) | 11.5kg | UMX301RGB*             |
| Ultra Maxi 24x3 WW*                 | 24x3W | Warm White                      | 11.5kg | UMX243WW*              |
| Ultra Maxi 24x3 NW*                 | 24x3W | Natural White                   | 11.5kg | UMX243NW*              |
| Ultra Maxi 24x3 WH*                 | 24x3W | White                           | 11.5kg | UMX243WH*              |
| Ultra Maxi 24x3 (R), (G), (B), (A)* | 24x3W | Red, Green, Blue, Amber         | 11.5kg | UMX243(R),(G),(B),(A)* |
| Ultra Maxi 24x3 RGB*                | 24x3W | Red (8), Green (8), Blue (8)    | 11.5kg | UMX243RGB*             |

\* Nominate beam widths as suffix : 8°, 15°, 20°, 25°, 40° or 60°

Note: WW= App 3,000k, NW= App 4,000K, WH= App 5,000K





## ACCENT LED LUMINAIRE

The Aqua LED range offers three sizes of luminaires providing a wide array of lumen packages. Multiple beam widths and colour options combined with a fully die-cast brass IP68 body, makes the Aqua Minor, Midi and Maxi suitable for a wide range of applications including submersible environments, 12V DC supply required.

## LUMINAIRE CONSTRUCTION

- Die-cast brass
- 10mm tempered glass lens
- Silicon gasket system
- Aqua Minor weight - 2.3kg
- Aqua Midi weight - 3.5kg
- Aqua Maxi weight - 5.5kg

## FEATURES


- High power 2W or 3W LEDs
- Lumiled as standard. Osram and Cree options
- Beam options 8°, 15°, 20°, 25°, 40°, 60°.
- Warm White app 3,000K, Natural White app 4,000K, White app 5,000K
- Red, Green, Blue, Amber and RGB options
- 12V DC supply via IP65 240V 90W Enclosure as standard. (Longer lengths on request)
- Luminaire supplied with 3MT fitted cable as standard
- CMI >80 for white versions
- For RGB options a remote driver is required
- 50,000 hour LED lamp life




Aqua Maxi





Aqua Midi

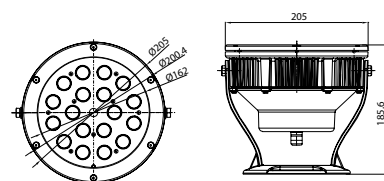

Aqua Maxi

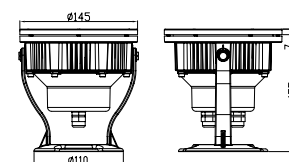

Aqua Midi

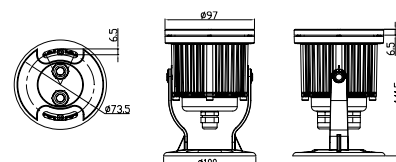

Aqua Minor

AQUA LED


iReady



| Description                         | Lamp  | Colour                       | Weight | Order Code             |
|-------------------------------------|-------|------------------------------|--------|------------------------|
| Aqua Minor 3x3W WW*                 | 3x3W  | Warm White                   | 2.3kg  | AMR33WW*               |
| Aqua Minor 3x3W NW*                 | 3x3W  | Natural White                | 2.3kg  | AMR33NW*               |
| Aqua Minor 3x3W WH*                 | 3x3W  | White                        | 2.3kg  | AMR33WH*               |
| Aqua Minor 3x3W (R), (G), (B), (A)* | 3x3W  | Red, Green, Blue, Amber      | 2.3kg  | AMR33(R),(G),(B),(A)*  |
| Aqua Minor 3x3W RGB*                | 3x3W  | Red (1), Green (1), Blue (1) | 2.3kg  | AMR33RGB*              |
| Aqua Midi 9x2W WW*                  | 9x2W  | Warm White                   | 3.5kg  | AMD92WW*               |
| Aqua Midi 9x2W NW*                  | 9x2W  | Natural White                | 3.5kg  | AMD92NW*               |
| Aqua Midi 9x2W WH*                  | 9x2W  | White                        | 3.5kg  | AMD92WH*               |
| Aqua Midi 9x2W (R), (G), (B), (A)*  | 9x2W  | Red, Green, Blue, Amber      | 3.5kg  | AMD92(R),(G),(B),(A)*  |
| Aqua Midi 9x2W RGB*                 | 9x2W  | Red (3), Green (3), Blue (3) | 3.5kg  | AMD92RGB*              |
| Aqua Maxi 18x2W WW*                 | 18x2W | Warm White                   | 5.5kg  | AMX182WW*              |
| Aqua Maxi 18x2W NW*                 | 18x2W | Natural White                | 5.5kg  | AMX182NW*              |
| Aqua Maxi 18x2W WH*                 | 18x2W | White                        | 5.5kg  | AMX182WH*              |
| Aqua Maxi 18x2W (R), (G), (B), (A)* | 18x2W | Red, Green, Blue, Amber      | 5.5kg  | AMX182(R),(G),(B),(A)* |
| Aqua Maxi 18x2W RGB*                | 18x2W | Red (3), Green (3), Blue (3) | 5.5kg  | AMX182RGB*             |

\* Nominate beam widths as suffix : 8°, 15°, 20°, 25°, 40° or 60°

Note: WW= App 3,000k, NW= App 4,000K, WH= App 5,000K

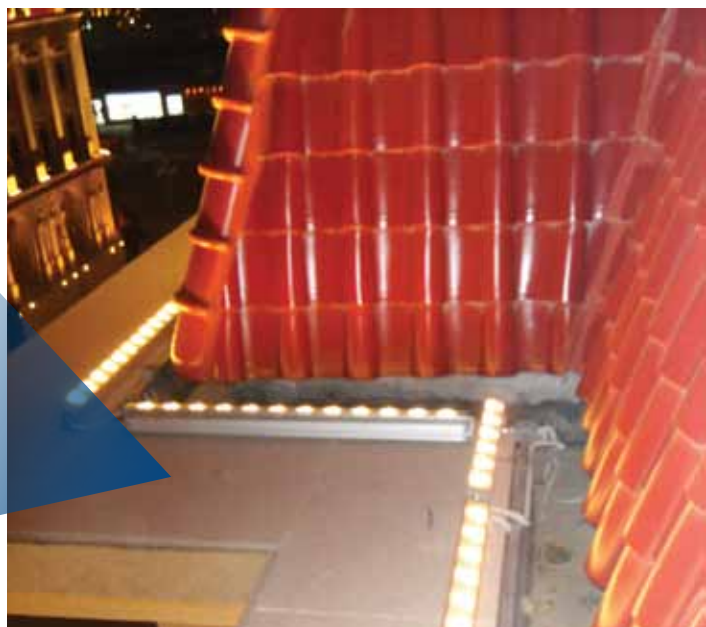



## ACCENT LED LUMINAIRE


The Lineales E is an extremely compact precision linear fluorescent floodlight ideal as an inconspicuous light source when highlighting structural or building facades. The luminaire offers a range of white, saturated colour or RGB in multiple beam options to provide suitable distribution for a wide range of requirements.

## LUMINAIRE CONSTRUCTION

- Extruded aluminium body with cast end plates
- Powdercoat finish in Aluminium grey
- 5mm tempered glass lens
- Silicon gasket system
- Adjustable end mounting bracket system

## FEATURES

- High powered 1W LED's
- Beam options - 8°, 15°, 20°, 25°, 40°, 60°
- Warm White app 3,000K, Natural White app 4,000k, White app 5,000K
- Red, Green, Blue, Amber or RGB options
- Surge protected control gear
- 36V DC control by way of remote IP65 driver enclosure
- CRI >80 for white versions
- 50,000 hour LED lamp life
- For RGB options a remote driver is required
- 3mtr cable as standard, other lengths on request
- Plug system options

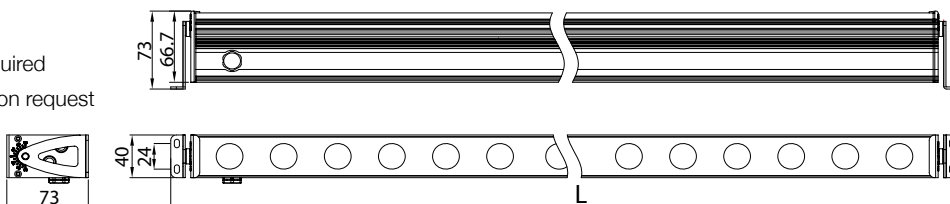

LINEALES E

**iReady**



| Description                          | Lamp                      | Length | Weight | Order Code            |
|--------------------------------------|---------------------------|--------|--------|-----------------------|
| Lineales E 9x1W (WW), (NW), (WH)*    | 9x1W                      | 330mm  | 1.0kg  | LE91(WW),(NW),(WH)*   |
| Lineales E 9x1W (R), (G), (B), (A)*  | 9x1W                      | 330mm  | 1.0kg  | LE91(R),(G),(B),(A)*  |
| Lineales E 9x1W RGB*                 | 9x1W (R3), (G3), (B3)     | 330mm  | 1.0kg  | LE91RGB*              |
| Lineales E 18x1W (WW), (NW), (WH)*   | 18x1W                     | 630mm  | 1.6kg  | LE181(WW),(NW),(WH)*  |
| Lineales E 18x1W (R), (G), (B), (A)* | 18x1W                     | 630mm  | 1.6kg  | LE181(R),(G),(B),(A)* |
| Lineales E 18x1W RGB*                | 18x1W (R6), (G6), (B6)    | 630mm  | 1.6kg  | LE181RGB*             |
| Lineales E 36x1W (WW), (NW), (WH)*   | 36x1W                     | 1200mm | 3.1kg  | LE361(WW),(NW),(WH)*  |
| Lineales E 36x1W (R), (G), (B), (A)* | 36x1W                     | 1200mm | 3.1kg  | LE361(R),(G),(B),(A)* |
| Lineales E 36x1W RGB*                | 36x1W (R12), (G12), (B12) | 1200mm | 3.1kg  | LE361RGB*             |

\* Nominate beam widths as suffix : 8°, 15°, 20°, 25°, 40° or 60°

Note: WW= App 3,000k, NW= App 4,000K, WH= App 5,000K

Other lengths may also be available. Contact your SLA representative for more information





## ACCENT LED LUMINAIRE



The Lineales S is an extremely compact precision linear fluorescent floodlight ideal as an inconspicuous light source when highlighting structural or building facades. The luminaire offers a range of white, saturated colour or RGB in multiple beam options to provide suitable distribution for a wide range of requirements.

## LUMINAIRE CONSTRUCTION

- Extruded aluminium body with cast end plates
- Powdercoat finish in Aluminium grey
- 5mm tempered glass lens
- Silicon gasket system
- Adjustable side mounting bracket system

## FEATURES

- High powered 1W and 3W LED's
- Beam options - 8°, 15°, 20°, 25°, 40°, 60°
- Warm White app 3,000K, Natural White app 4,000k, White app 5,000K
- Red, Green, Blue, Amber or RGB options
- Surge protected control gear
- Integral control gear for 240V supply allowing for ease of installation
- CRI >80 for white version
- 50,000 hour LED lamp life
- 3mtr cable as standard, other lengths on request
- Plug system options

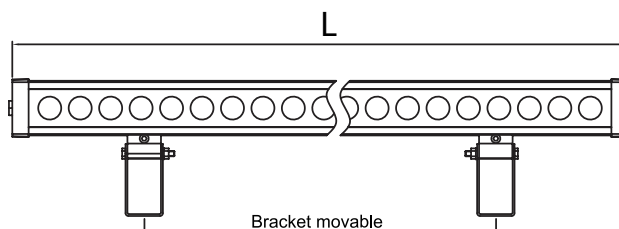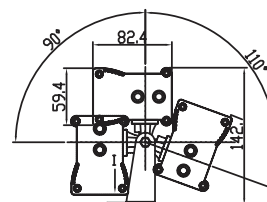

## LINEALES S



**iReady**

| Description                          | Lamp                      | Length | Weight | Order Code            |
|--------------------------------------|---------------------------|--------|--------|-----------------------|
| Lineales S 6x3W (WW), (NW), (WH)*    | 6x3W                      | 330mm  | 1.8kg  | LS63(WW),(NW),(WH)*   |
| Lineales S 6x3W (R), (G), (B), (A)*  | 6x3W                      | 330mm  | 1.8kg  | LS63(R),(G),(B),(A)*  |
| Lineales S 9x3W RGB*                 | 9x3W (R3), (G3), (B3)     | 330mm  | 1.9kg  | LS93RGB*              |
| Lineales S 12x3W (WW), (NW), (WH)*   | 12x3W                     | 630mm  | 3.3kg  | LS123(WW),(NW),(WH)*  |
| Lineales S 12x3W (R), (G), (B), (A)* | 12x3W                     | 630mm  | 3.3kg  | LS123(R),(G),(B),(A)* |
| Lineales S 18x3W RGB*                | 18x3W (R6), (G6), (B6)    | 630mm  | 3.4kg  | LS183RGB*             |
| Lineales S 24x3W (WW), (NW), (WH)*   | 24x3W                     | 1230mm | 5.3kg  | LS243(WW),(NW),(WH)*  |
| Lineales S 24x3W (R), (G), (B), (A)* | 24x3W                     | 1230mm | 5.3kg  | LS243(R),(G),(B),(A)* |
| Lineales S 36x1W RGB*                | 36x1W (R12), (G12), (B12) | 1230mm | 5.5kg  | LS361RGB*             |

\* Nominate beam widths as suffix : 8°, 15°, 20°, 25°, 40° or 60°

Note: WW= App 3,000k, NW= App 4,000K, WH= App 5,000K

Other lengths may also be available. Contact your SLA representative for more information

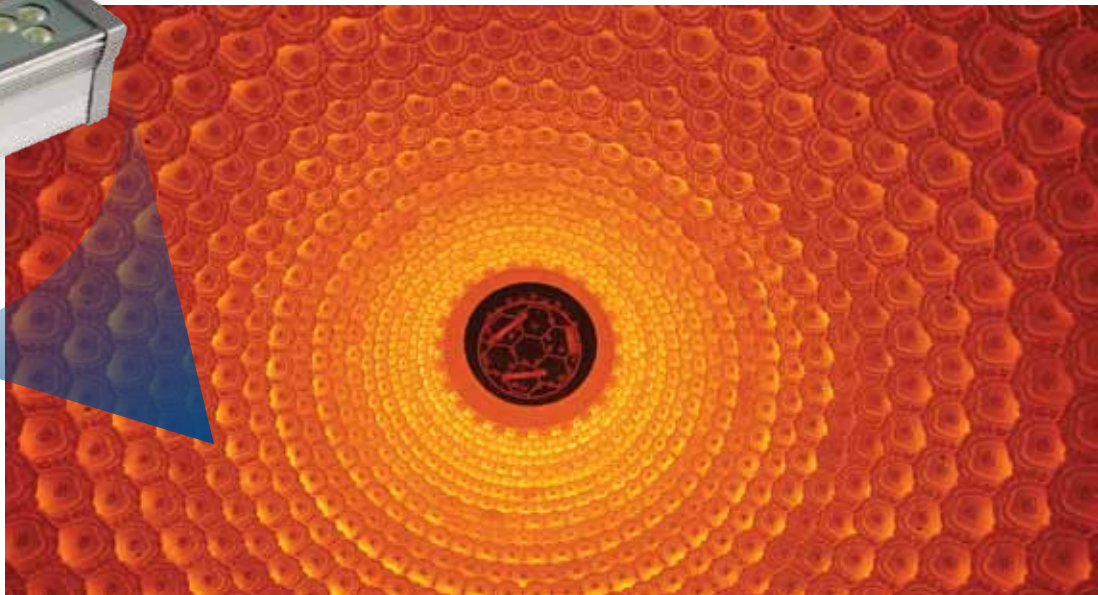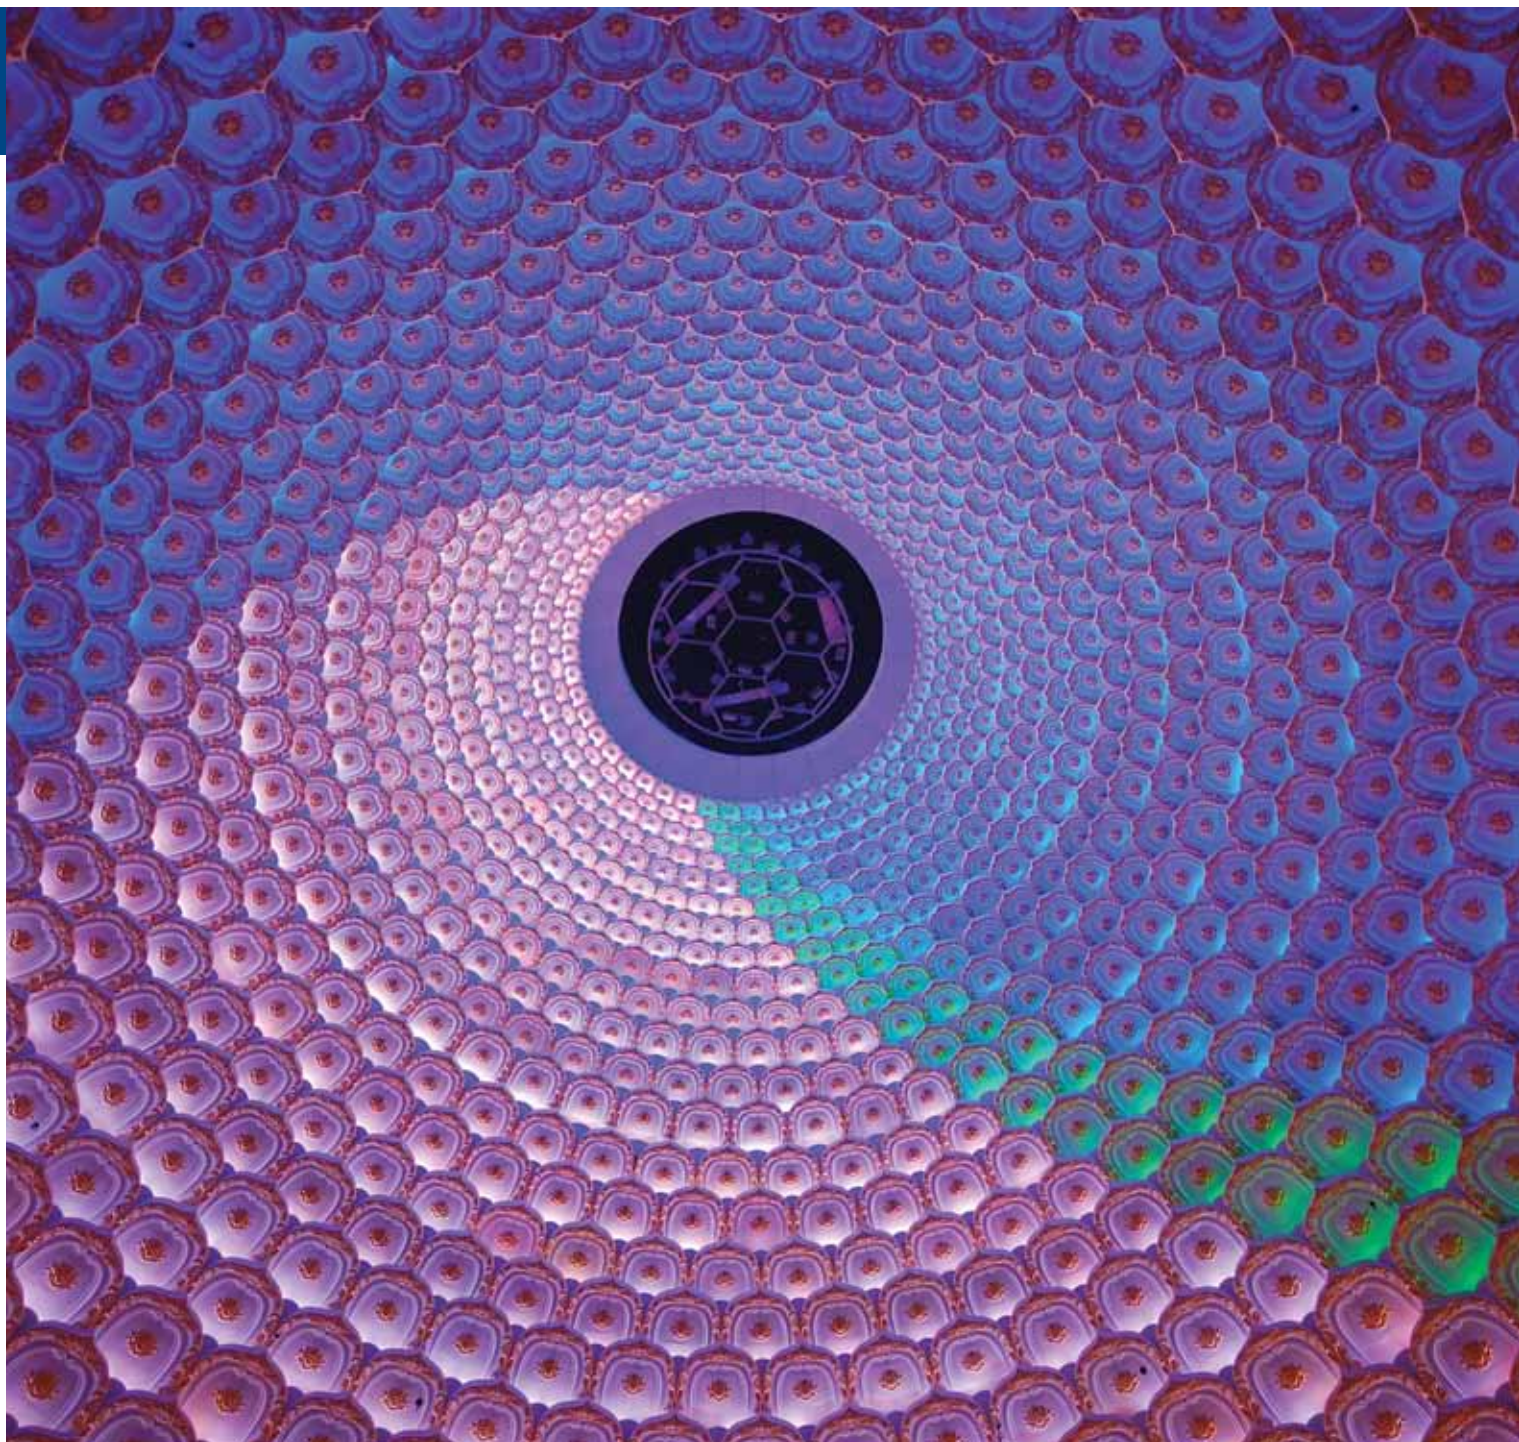



## ACCENT LED LUMINAIRE




The Lineales U is an extremely compact precision linear fluorescent floodlight ideal as an inconspicuous light source when highlighting structural or building facades. The luminaire offers a range of white, saturated colour or RGB in multiple beam options to provide suitable distribution for a wide range of requirements.

## LUMINAIRE CONSTRUCTION

- Extruded aluminium body with cast end plates
- Powdercoat finish in Aluminium grey
- 5mm tempered glass lens
- Silicon gasket system
- Adjustable mounting bracket system on underside of luminaire

## FEATURES

- High powered 3W LED's
- Beam options - 8°, 15°, 20°, 25°, 40°, 60°
- Warm White app 3,000K, Natural White app 4,000k, White app 5,000K
- Red, Green, Blue, Amber or RGB options
- Surge protected control gear
- Integral control gear for 240V supply allowing for ease of installation
- CRI >80 for white versions
- 50,000 hour LED lamp life
- 3mtr cable as standard, other lengths on request
- Plug system options

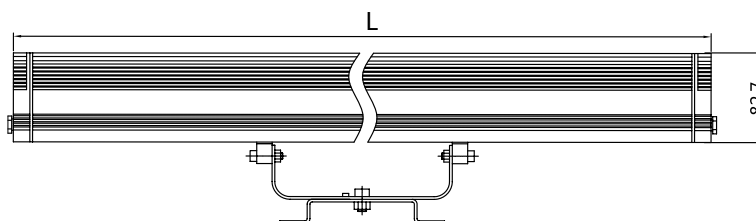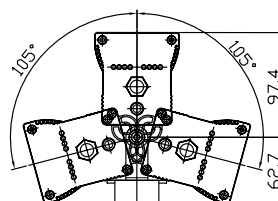

LINEALES U

**iReady**





| Description                          | Lamp                      | Length | Weight | Order Code            |
|--------------------------------------|---------------------------|--------|--------|-----------------------|
| Lineales U 9x3W (WW), (NW), (WH)*    | 9x3W                      | 330mm  | 2.1kg  | LU93(WW),(NW),(WH)*   |
| Lineales U 9x3W (R), (G), (B), (A)*  | 9x3W                      | 330mm  | 2.1kg  | LU93(R),(G),(B),(A)*  |
| Lineales U 12x3W RGB*                | 12x3W (R4), (G4), (B4)    | 330mm  | 2.2kg  | LU123RGB*             |
| Lineales U 27x3W (WW), (NW), (WH)*   | 27x3W                     | 930mm  | 5.2kg  | LU273(WW),(NW),(WH)*  |
| Lineales U 27x3W (R), (G), (B), (A)* | 27x3W                     | 930mm  | 5.2kg  | LU273(R),(G),(B),(A)* |
| Lineales U 36x3W RGB*                | 36x3W (R12), (G12), (B12) | 930mm  | 5.3kg  | LU363RGB*             |
| Lineales U 36x3W (WW), (NW), (WH)*   | 36x3W                     | 1200mm | 5.2kg  | LU363(WW),(NW),(WH)*  |
| Lineales U 36x3W (R), (G), (B), (A)* | 36x3W                     | 1200mm | 5.2kg  | LU363(R),(G),(B),(A)* |
| Lineales U 48x3W RGB*                | 48x3W (R16), (G16), (B16) | 1200mm | 5.4kg  | LU483RGB*             |

\* Nominate beam widths as suffix : 8°, 15°, 20°, 25°, 40° or 60°

Note: WW= App 3,000k, NW= App 4,000K, WH= App 5,000K

Other lengths may also be available. Contact your SLA representative for more information

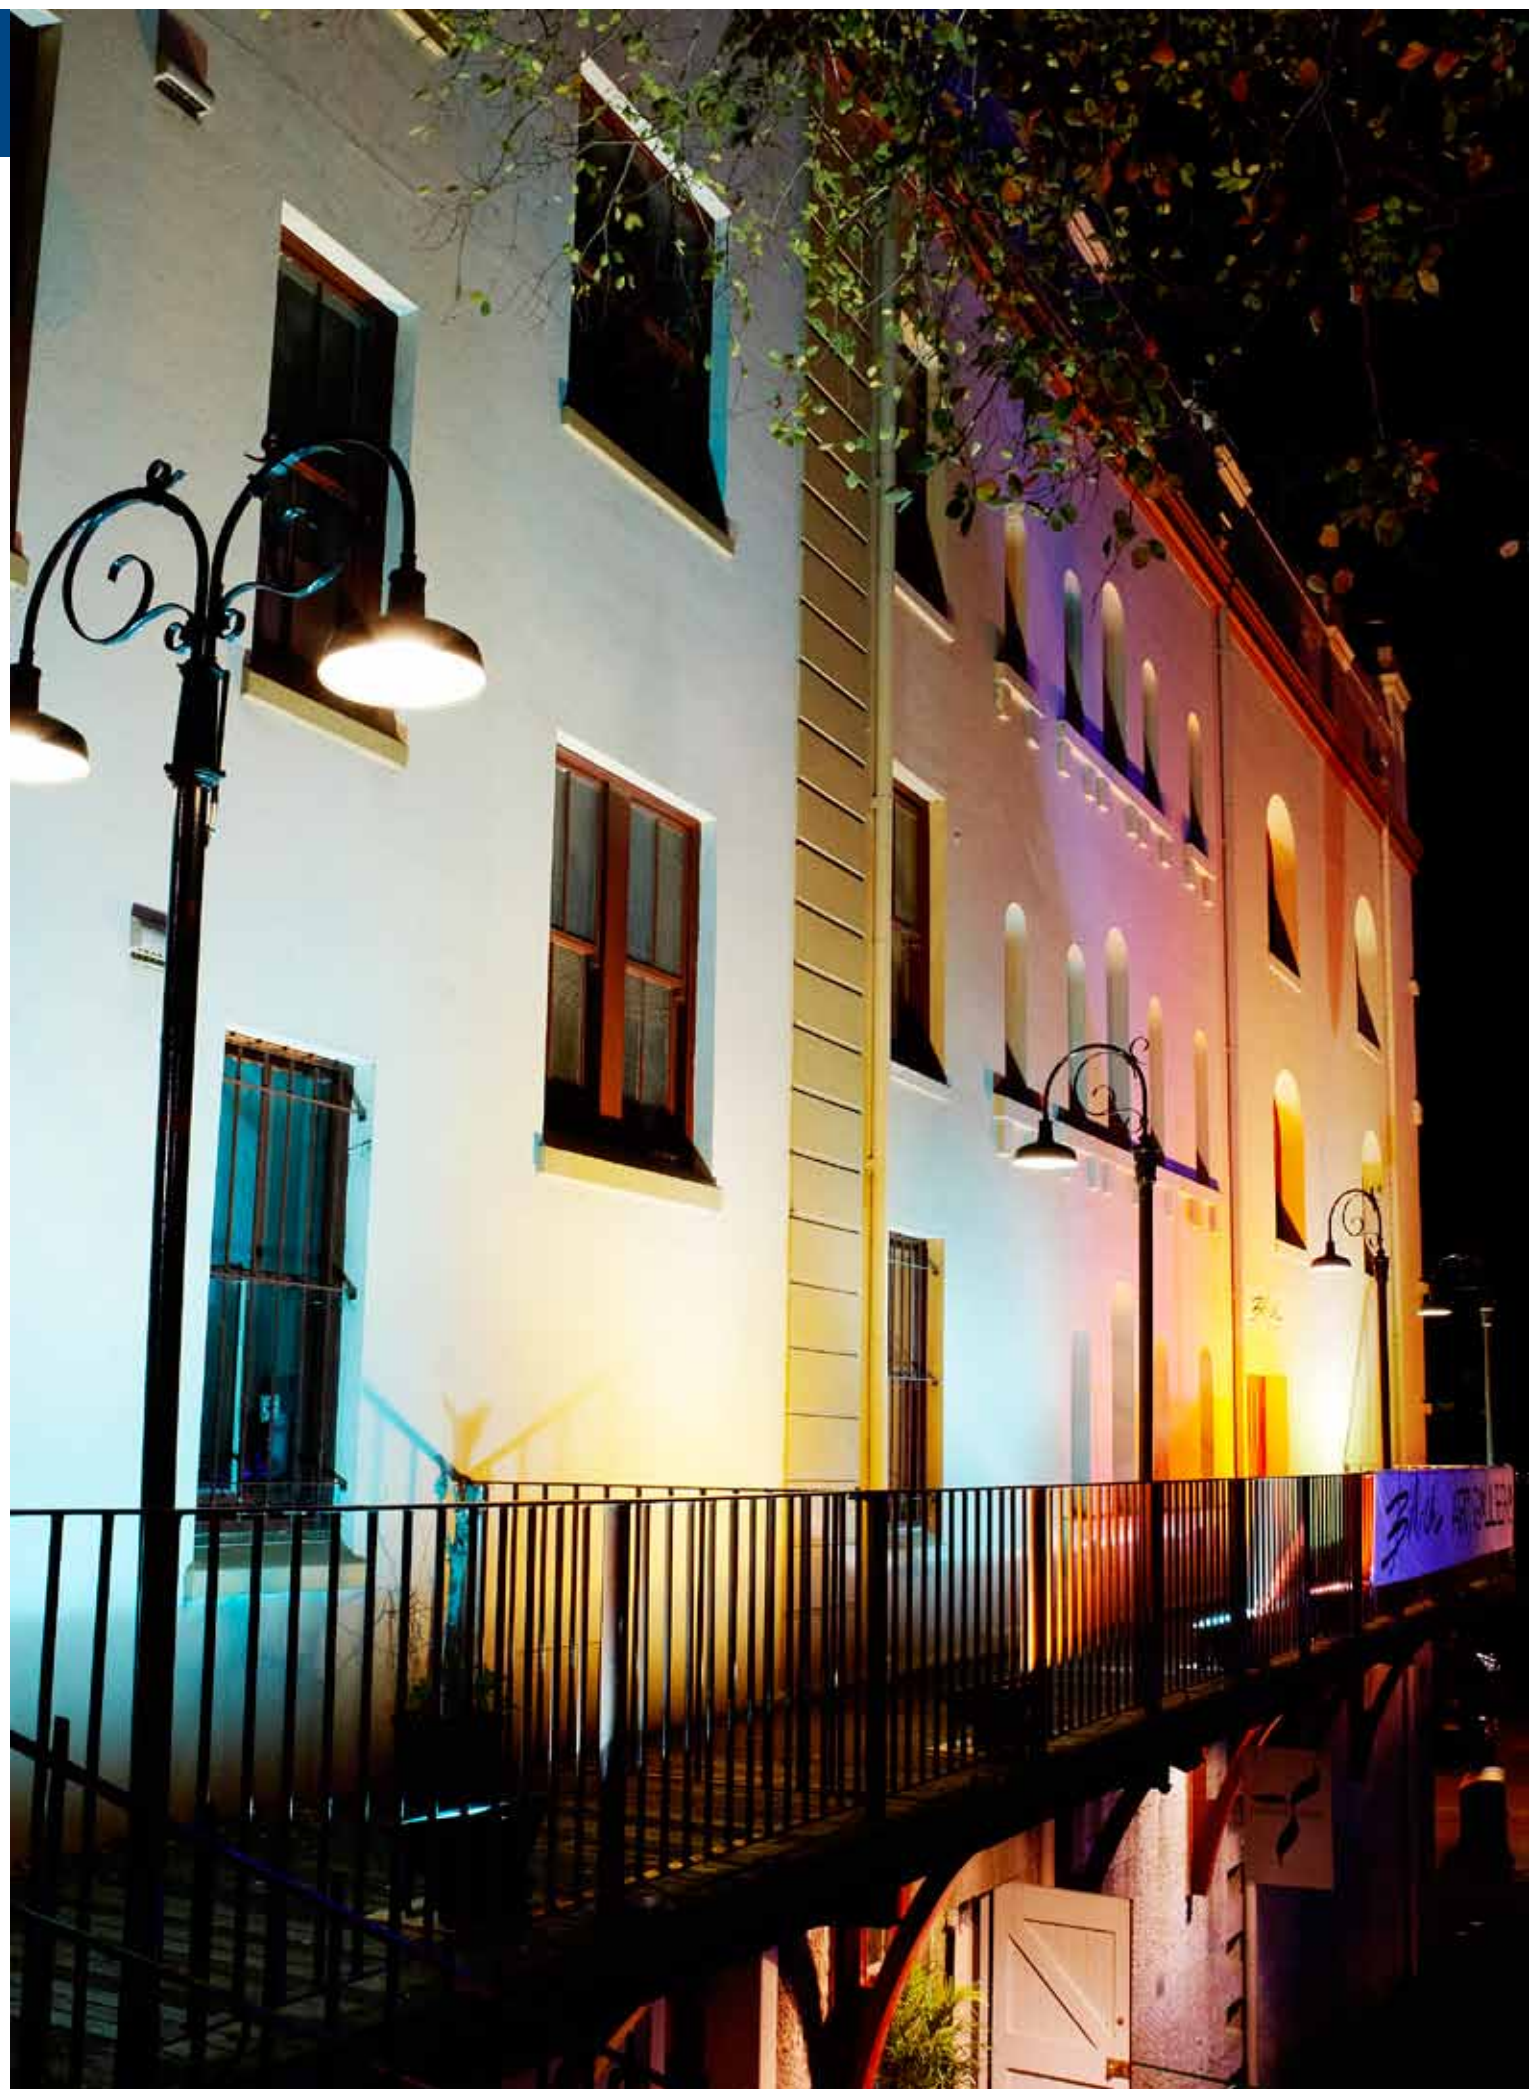



## LED MARKER LIGHTS

The Rokast is a range of compact LED Marker lights featuring high powered 3W LED's with a wide rang of colour and RGB options. The Rokast Small utilises a remote IP65 driver whilst the Rokast Medium incorporates an integral driver with 240V mains volt supply.

## LUMINAIRE CONSTRUCTION

- Die-Cast aluminium body powdercoated grey
- Ultra-violet resistant polycarbonate lens system for all
- Rokast Small - Flat clear, domed opal, or domed faceted options
- Rokast Small - remote IP65 driver. - Weight 0.42kg
- Rokast Medium - Integral driver with 240V supply. - Weight 2.0kg

## FEATURES

- High powered 3W LED
- Lumiled as standard, option for Cree or Osram
- Warm White app 3,000K, Natural White app 4,000K, White app 5,000K
- Red, Green, Blue, Amber or RGB options
- DMX compatible
- CRI >80 for white versions
- Rokast small RGB requires a remote driver
- 50,000 hour LED lamp life



Rokast Small Opal

Rokast Small Faceted



Rokast Small Clear

Rokast Medium Opal



## ROKAST LED



iReady





| Description                                   | Lamp                  | Weight | Order Code            |
|-----------------------------------------------|-----------------------|--------|-----------------------|
| Rokast Small Clear 3x3W (WW), (NW), (WH)*     | 3x3W                  | 0.42kg | RSC33(WW),(NW),(WH)*  |
| Rokast Small Clear 3x3W (R), (G), (B), (A)*   | 3x3W                  | 0.42kg | RSC33(R),(G),(B),(A)* |
| Rokast Small Clear 3x3W RGB*                  | 3x3W (R1), (G1), (B1) | 0.42kg | RSC33RGB*^            |
| Rokast Small Opal 3x3W (WW), (NW), (WH)*      | 3x3W                  | 0.42kg | RSO33(WW),(NW),(WH)*  |
| Rokast Small Opal 3x3W (R), (G), (B), (A)*    | 3x3W                  | 0.42kg | RSO33(R),(G),(B),(A)* |
| Rokast Small Opal 3x3W RGB*^                  | 3x3W (R1), (G1), (B1) | 0.42kg | RSO33RGB*^            |
| Rokast Small Faceted 3x3W (WW), (NW), (WH)*   | 3x3W                  | 0.42kg | RSF33(WW),(NW),(WH)*  |
| Rokast Small Faceted 3x3W (R), (G), (B), (A)* | 3x3W                  | 0.42kg | RSF33(R),(G),(B),(A)* |
| Rokast Small Faceted 3x3W RGB*                | 3x3W (R1), (G1), (B1) | 0.42kg | RSF33RGB*^            |
| Rokast Medium Opal 6x3W (WW), (NW), (WH)      | 6x3W                  | 2.0kg  | RMO63(WW),(NW),(WH)   |
| Rokast Medium Opal 6x3W (R), (G), (B), (A)    | 6x3W                  | 2.0kg  | RMO63(R),(G),(B),(A)  |
| Rokast Medium Opal 6x3W RGB                   | 6x3W (R2), (G2), (B2) | 2.0kg  | RMO63RGB              |

Note: \* Requires a remote driver  
^ Requires a special signal differentiator unit



Rokast Small Opal






Rokast Small Faceted



Rokast Small Clear



Rokast Medium Opal



# ALTO LED **NEW**



## ACCENT LED DOWNLIGHT


The Alto is an IP54 rated downlight featuring 16 high output 2W LEDs with a wide range of beam options in Warm White, Natural White or White. Featuring a diecast aluminium body with options for either integral driver or low profile remote driver configurations the luminaire is ideal for most applications.

## LUMINAIRE CONSTRUCTION


- Powdercoated die-cast aluminium body
- Integrated cooling fins for peak efficiency
- 3 mounting clips for a firm fixing arrangement
- Cut out Ø196mm
- Weight 3.8kg - Integral, 3.5kg - remote version including driver

## FEATURES

- High powered 2W LED
- Lumiled as standard, option for Cree or Osram
- Beam options 8°, 15°, 20°, 25°, 40°, 60°
- Warm White app 3,000K, Natural White app 4,000K, White app 5,000K
- 240V supply
- Surge protected control gear
- CRI >80
- 50,000 hour LED lamp life

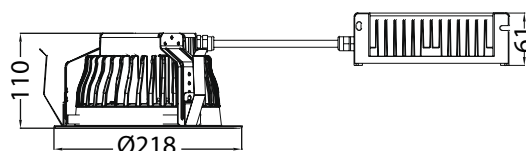

Cut off dimension: Ø196mm

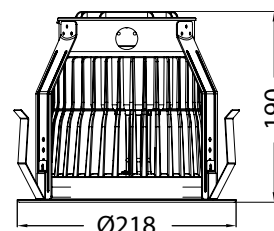

Cut off dimensions: Ø196mm

ALTO LED

**iReady**



| Description             | Lamp  | Colour        | Depth | Weight | Order Code |
|-------------------------|-------|---------------|-------|--------|------------|
| Alto Integral 16x2W WW* | 16x2W | Warm White    | 190mm | 3.8kg  | IBI162WW*  |
| Alto Integral 16x2W NW* | 16x2W | Natural White | 190mm | 3.8kg  | IBI162NW*  |
| Alto Integral 16x2W WH* | 16x2W | White         | 190mm | 3.8kg  | IBI162WH*  |
| Alto Remote 16x2W WW*   | 16x2W | Warm White    | 110mm | 3.5kg  | IBR162WW*  |
| Alto Remote 16x2W NW*   | 16x2W | Natural White | 110mm | 3.5kg  | IBR162NW*  |
| Alto Remote 16x2W WH*   | 16x2W | White         | 110mm | 3.5kg  | IBR162WH*  |


\* Nominate beam widths as suffix : 8°, 15°, 20°, 25°, 40° or 60°

Note: WW= App 3,000k, NW= App 4,000K, WH= App 5,000K

# DL 10 SERIES

LED/LEP

LED/LEP

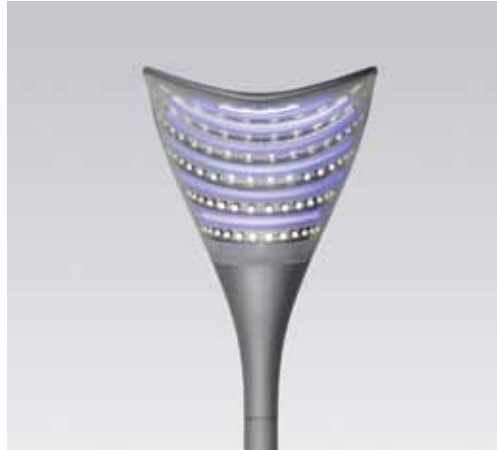

# CITY LIGHT PLUS LED **NEW**



## DECORATIVE LED POST TOP


The City Light Plus LED is a decorative post top luminaire featuring a flat circular aluminium canopy. The luminaire features an LED module with either symmetrical or single sided asymmetrical distribution in 3,000k or 4,000k colour temperature options.

## LUMINAIRE CONSTRUCTION


- Die-cast aluminium base to suit 76mm spigot
- Pressed aluminium flat canopy
- Powdercoat finish in Siteco metallic grey DB702S
- Optical enclosure made of UV-stabilised acrylic

## FEATURES

- Long life 39W 50,000 hour LED lamp life
- Symmetric or asymmetric (house side shielding) distribution
- 3,000K or 4,000K options
- 240V Mains Volt supply
- Control options for 100%/50% output
- CRI >80
- 50,000 hour LED lamp life

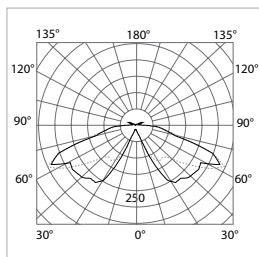


City Light Plus LED  
— C0 - C180    --- C90 - C270

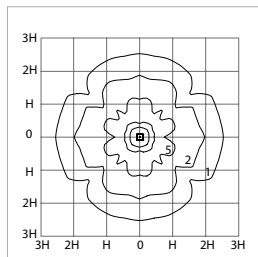

City Light Plus LED  
Symmetric  
H = 4.5m

| H   | Multiplier |
|-----|------------|
| 4.0 | 1.27       |
| 4.5 | 1.00       |
| 5.0 | 0.81       |

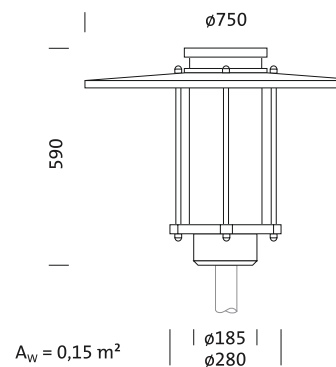

CITY LIGHT PLUS LED

**iReady**



| Description                  | Lamp   | Distribution | Weight | Order Code   |
|------------------------------|--------|--------------|--------|--------------|
| City Light P S 30x1W LED 3K  | 3,000K | Symmetric    | 12.5kg | 5XA52717WS18 |
| City Light P S 30x1W LED 4K  | 4,000K | Symmetric    | 12.5kg | 5XA52717NS18 |
| City Light P AS 25x1W LED 3K | 3,000K | Asymmetric   | 12.5kg | 5XA52717WA18 |
| City Light P AS 25x1W LED 4K | 4,000K | Asymmetric   | 12.5kg | 5XA52717NA18 |

Note: "S" represents symmetrical distribution  
"AS" represents house side shielding distribution

# CITY LIGHT ELEGANCE LED **NEW**



## DECORATIVE LED POST TOP


The City Light Elegance LED is a decorative post top luminaire featuring a domed circular aluminium canopy. The luminaire features an LED module with either symmetrical or single sided asymmetrical distribution in 3,000k or 4,000k colour temperature options.

## LUMINAIRE CONSTRUCTION


- Die-cast aluminium base to suit 76mm spigot
- Pressed aluminium domed canopy
- Powdercoat finish in Siteco metallic grey DB702S
- Optical enclosure made of UV-stabilised acrylic

## FEATURES

- Long life 39W 50,000 hour LED lamp life
- Symmetric or asymmetric (house side shielding) distribution
- 3,000K or 4,000K options
- 240V Mains Volt supply
- Control options for 100%/50% output
- CRI >80
- 50,000 hour LED lamp life

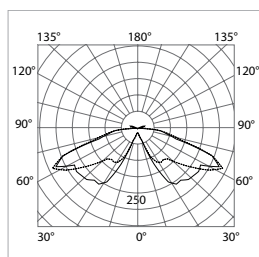


City Light Elegance LED  
— C0 - C180    --- C90 - C270

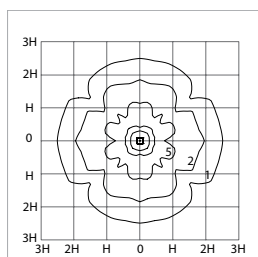

City Light Elegance LED  
Symmetric  
H = 4.5m

| H   | Multiplier |
|-----|------------|
| 4.0 | 1.27       |
| 4.5 | 1.00       |
| 5.0 | 0.81       |

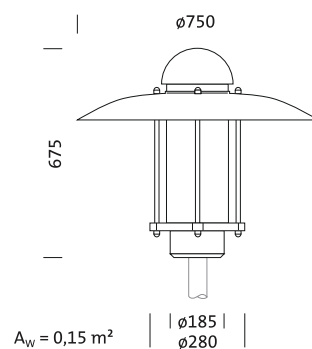

## CITY LIGHT ELEGANCE LED

**iReady**



| Description                  | Lamp   | Distribution | Weight | Order Code   |
|------------------------------|--------|--------------|--------|--------------|
| City Light E S 30x1W LED 3K  | 3,000K | Symmetric    | 13.0kg | 5XA52717WS28 |
| City Light E S 30x1W LED 4K  | 4,000K | Symmetric    | 13.0kg | 5XA52717NS28 |
| City Light E AS 25x1W LED 3K | 3,000K | Asymmetric   | 13.0kg | 5XA52717WA28 |
| City Light E AS 25x1W LED 4K | 4,000K | Asymmetric   | 13.0kg | 5XA52717NA28 |

Note: "S" represents symmetrical distribution  
"AS" represents house side shielding distribution

# LANTERN LED NEW



## DECORATIVE LED POST TOP


The Lantern LED is a decorative post top luminaire featuring a domed aluminium canopy and uniquely moulded acrylic visor. The luminaire also features an LED module with either symmetrical or single sided asymmetrical distribution in 3,000K or 4,000K colour temperature options.

## LUMINAIRE CONSTRUCTION


- Die-cast aluminium base to suit 76mm spigot
- Pressed aluminium domed canopy
- Unique moulded acrylic visor
- Powdercoat finish in Siteco metallic grey DB702S

## FEATURES

- Decorative housing element option
- Long life 39W 50,000 hour LED lamp life
- Symmetric or asymmetric (house side shielding) distribution
- 3,000K or 4,000K options
- 240V Mains Volt supply
- Control options for 100%/50%
- Option for decorative housing elements
- CRI >80
- 50,000 hour LED lamp life

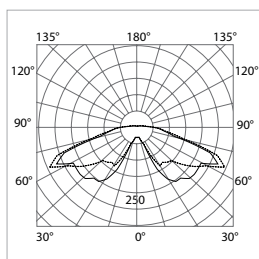

Lantern LED  
—C0 - C180    ---C90 - C270

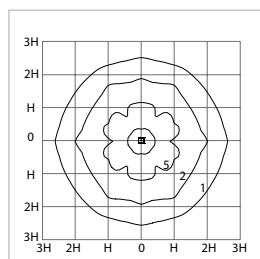


Lantern LED  
Symmetric  
H = 4.5m

| H   | Multiplier |
|-----|------------|
| 4.0 | 1.27       |
| 4.5 | 1.00       |
| 5.0 | 0.81       |



Lantern with Decorative Housing Element

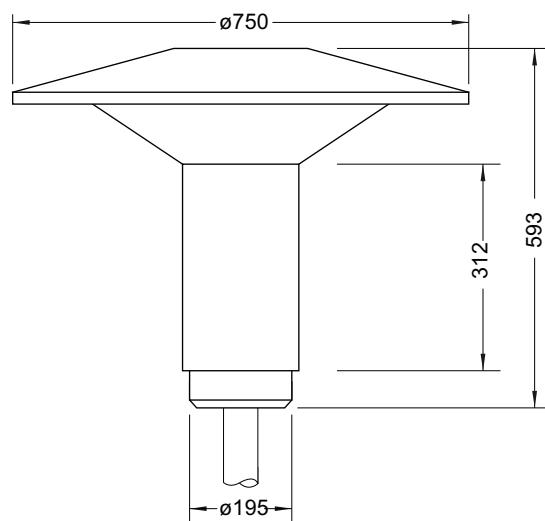

LANTERN LED

iReady



| Description             | Lamp   | Distribution | Weight | Order Code   |
|-------------------------|--------|--------------|--------|--------------|
| Lantern S 30x1W LED 3K  | 3,000K | Symmetric    | 12.0kg | 5XA52517WS28 |
| Lantern S 30x1W LED 4K  | 4,000K | Symmetric    | 12.0kg | 5XA52517NS28 |
| Lantern AS 25x1W LED 3K | 3,000K | Asymmetric   | 12.0kg | 5XA52517WA28 |
| Lantern AS 25x1W LED 4K | 4,000K | Asymmetric   | 12.0kg | 5XA52517NA28 |

Note: "S" represents symmetrical distribution  
"AS" represents house side shielding distribution

# CITY LIGHT BOLLARD LED NEW

LED/LEP

LED/LEP



## DECORATIVE LED BOLLARD


The City Light Bollard LED range is manufactured from die-cast and extruded aluminium with an option for either a flat or domed top cap arrangement. The bollard features an LED module with either symmetrical or single sided asymmetrical distribution in 3,000K or 4,000K colour temperature options.

## LUMINAIRE CONSTRUCTION


- Die-cast aluminium head assembly
- Extruded aluminium pole
- Acrylic visor
- Powdercoat finish in Siteco metallic grey DB702S
- Standard version with flat cap, "E" version with domed cap

## FEATURES


- Long life 39W 50,000 hour LED lamp life
- Symmetric or asymmetric (house side shielding) distribution
- 3,000K or 4,000K options
- 240V Mains Volt supply
- Control options for 100%/50% output
- CRI >90
- 50,000 hour LED lamp life

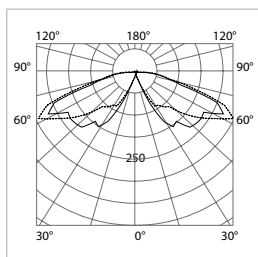

City Light Bollard LED  
—C0 - C180    - - -C90 - C270

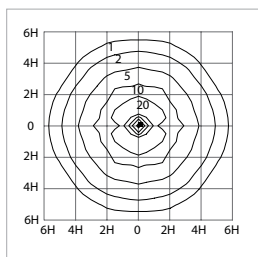

City Light Bollard LED  
H = 1.5m

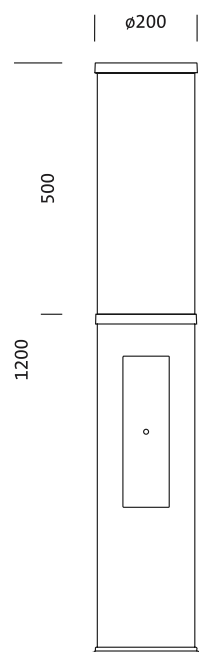


CITY LIGHT BOLLARD LED

**iReady**



| Description                      | Lamp   | Distribution | Weight | Order Code   |
|----------------------------------|--------|--------------|--------|--------------|
| City Light Bol S 30x1W LED 3K    | 3,000K | Symmetric    | 11.5kg | 5XA52817WS28 |
| City Light Bol S 30x1W LED 4K    | 4,000K | Symmetric    | 11.5kg | 5XA52817NS28 |
| City Light Bol AS 25x1W LED 3K   | 3,000K | Asymmetric   | 11.5kg | 5XA52817WA28 |
| City Light Bol AS 25x1W LED 4K   | 4,000K | Asymmetric   | 11.5kg | 5XA52817NA28 |
| City Light Bol E S 30x1W LED 3K  | 3,000K | Symmetric    | 11.5kg | 5XA52817WS58 |
| City Light Bol E S 30x1W LED 4K  | 4,000K | Symmetric    | 11.5kg | 5XA52817NS58 |
| City Light Bol E AS 25x1W LED 3K | 3,000K | Asymmetric   | 11.5kg | 5XA52817WA58 |
| City Light Bol E AS 25x1W LED 4K | 4,000K | Asymmetric   | 11.5kg | 5XA52817NA58 |

Note: "S" represents symmetrical distribution  
"AS" represents house side shielding distribution

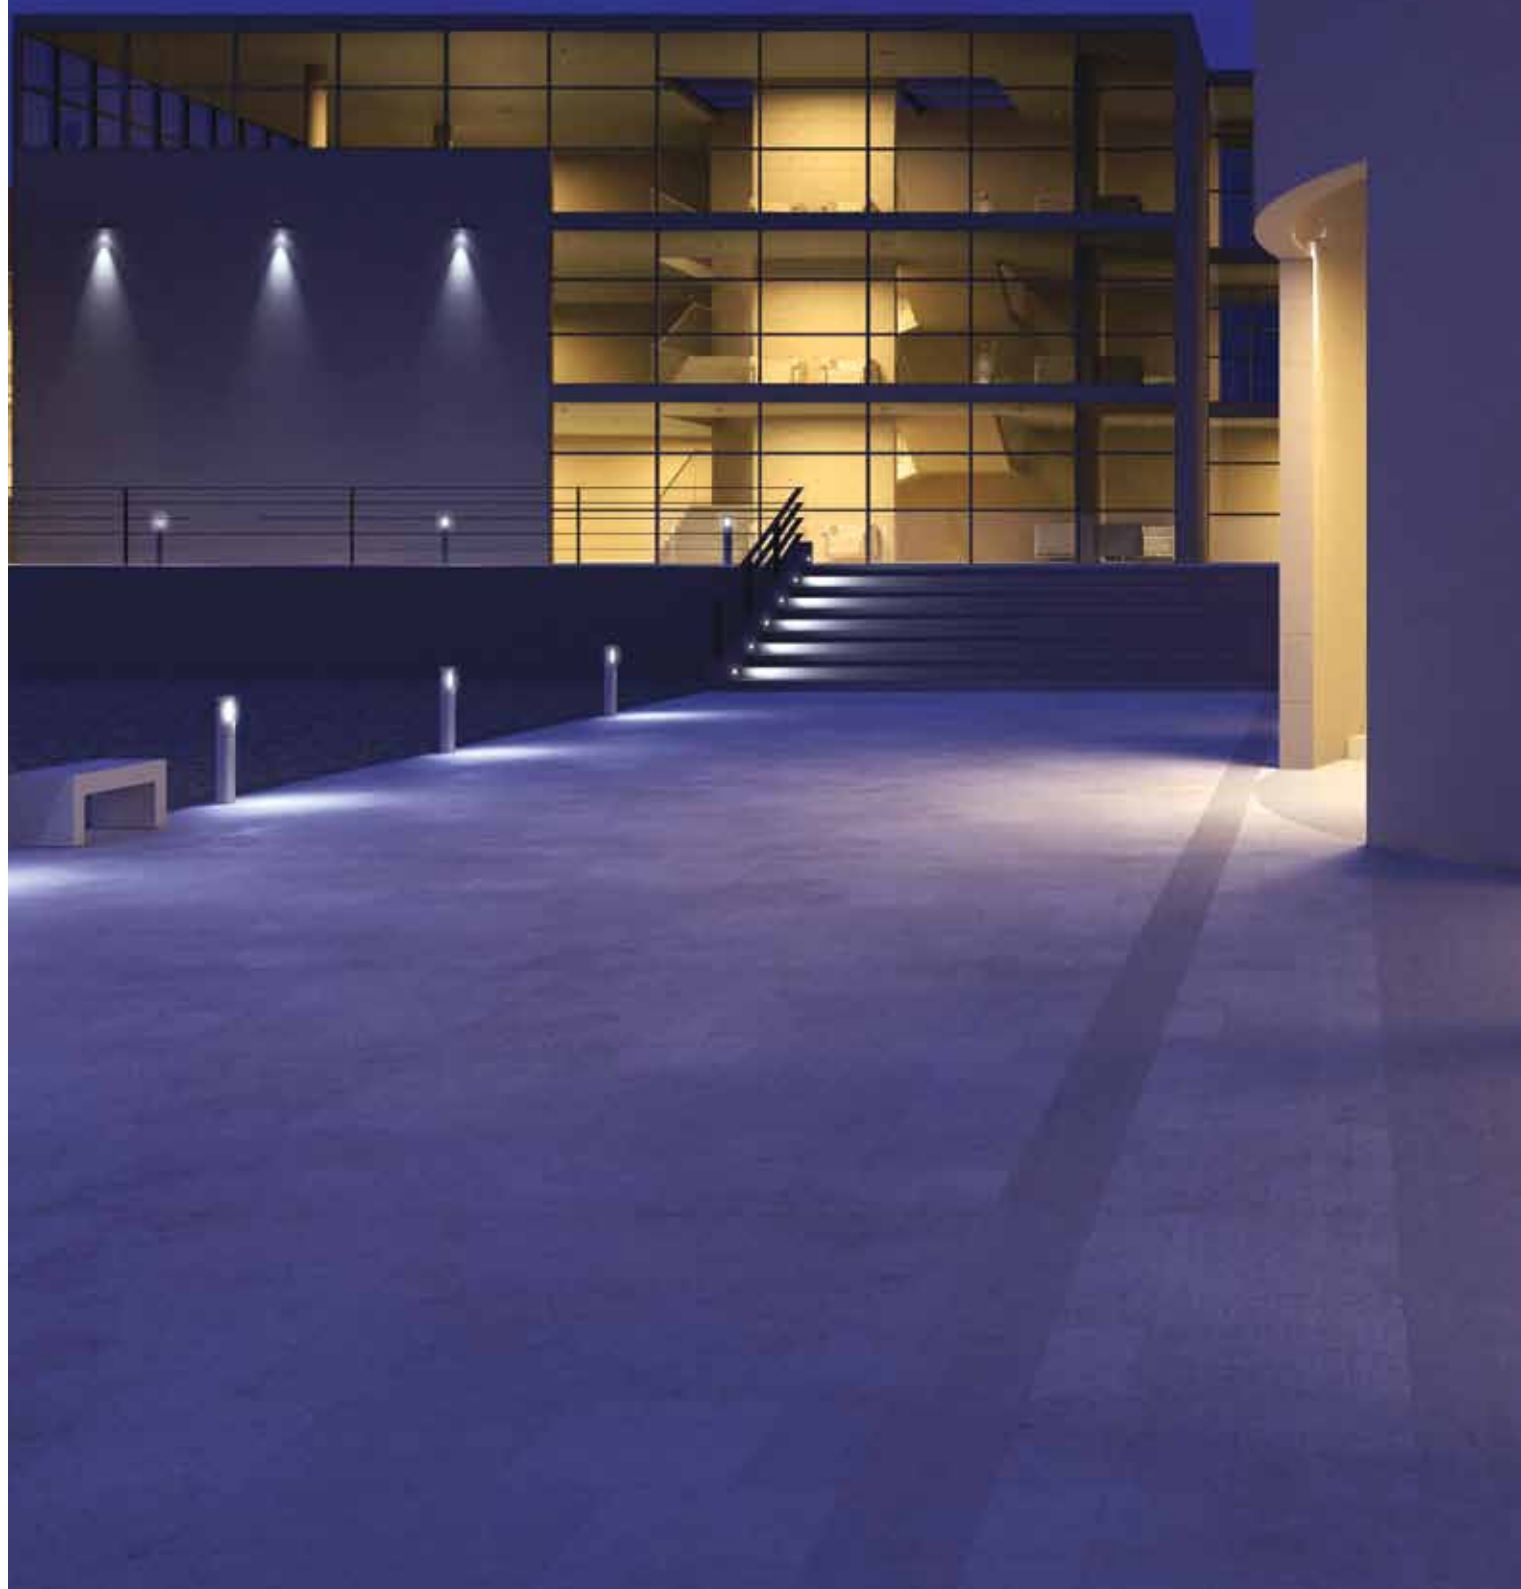



## DECORATIVE LED BOLLARD


The DL20 is a precision designed and manufactured luminaire with excellent aesthetic charm. The LED distribution is by way of a series of modules positioned within a luminaire ring under the top canopy thereby maximising output and minimising obtrusive glare.

## LUMINAIRE CONSTRUCTION


- Housing manufactured from die cast aluminium
- Lighting enclosure made of white glass with ideal transmission levels and excellent photometric characteristics
- Powdercoat finish in Siteco Metallic Grey DB702S
- 76mm spigot

## FEATURES

- 3,000K or 4,000K options
- 3 beam types, side throw, pathway specific, symmetrical
- 24x High powered 1W LED's
- Ideal for mounting heights of 4-6m
- Control option for 100%/50% output
- CRI >80
- 50,000 hour LED lamp life

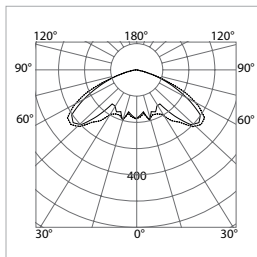


DL20 3K  
cd/klm  
— C0 - C180    -- C90 - C270

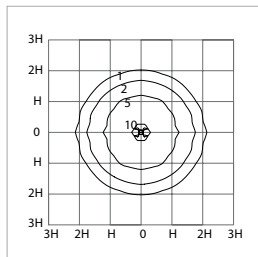

DL20 3K LED Symmetric  
H = 4.5m

| H   | Multiplier |
|-----|------------|
| 4.0 | 1.27       |
| 4.5 | 1.00       |
| 5.0 | 0.81       |

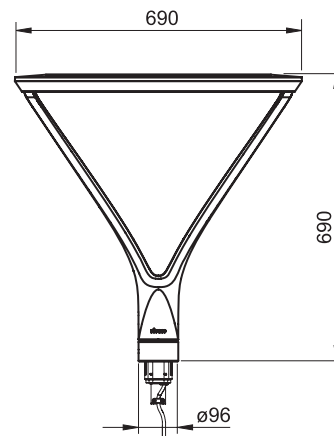

## DL20

iReady



| Description                   | Lamp  | Colour | Weight | Order Code    |
|-------------------------------|-------|--------|--------|---------------|
| DL20 Plus 24x1W 3K Side Throw | 24x1W | 3000K  | 13.7kg | 5XA5128LWA008 |
| DL20 Plus 24x1W 3K Symmetric  | 24x1W | 3000K  | 13.7kg | 5XA5128LWS008 |
| DL20 Plus 24x1W 3K Pathway    | 24x1W | 3000K  | 13.7kg | 5XA5128LWR008 |
| DL20 Plus 24x1W 4K Side Throw | 24x1W | 4000K  | 13.7kg | 5XA5128NWA008 |
| DL20 Plus 24x1W 4K Symmetric  | 24x1W | 4000K  | 13.7kg | 5XA5128NWS008 |
| DL20 Plus 24x1W 4K Pathway    | 24x1W | 4000K  | 13.7kg | 5XA5128NWR008 |