



MGE Galaxy 3500

“Performance power protection for critical applications.”

10/15/20/30/40 kVA - Three Phase in, Three Phase out

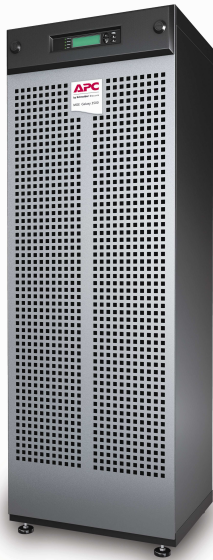

Wide Enclosure
(10/15/20/30/40 kVA)

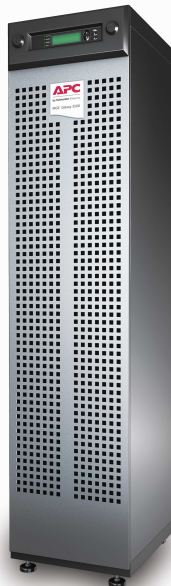

Narrow Enclosure
(10/15/20 kVA)

A performance UPS with
excellent efficiency and
optimized footprint -
for commercial and
technical facilities up to
industrial environments

- Double Conversion On-Line Topology
- Compact and robust design
- Best-in-class efficiency (96%)
- Parallel Capability
- Network manageability
- IP51 for Industrial environments

MGE Galaxy 3500 -

Features & Benefits

Performance power protection with best in-class efficiency for technical facilities and industrial applications.

The MGE Galaxy 3500 offers a new way for electrical contractors and facility managers to achieve reliable and cost-effective protection for mission-critical applications. A modular design with factory installed hot swappable batteries and electronics reduce installation time and make the MGE Galaxy 3500 easy to deploy and maintain. The product features an excellent 96% efficiency (TUV certified) which means reduced Total Cost of Ownership and customer savings every year. MGE Galaxy 3500 ships with dual mains input and a built-in maintenance bypass switch increasing the system availability. The environment monitoring card is supplied with the product, as well as a start-up service to ensure the right configuration from start. And for demanding industrial environments, reliability features include IP 51 protection, standard 2 millimeter thick steel plate enclosure, and user-replaceable air filters.

Availability

- > Dual mains input
- > Automatic internal bypass
- > Hot-swappable batteries
- > Modular Power Module
- > Generator compatible
- > Parallel up to 4 units for capacity and redundancy

Serviceability

- > Manual maintenance bypass
- > User-replaceable air filters
- > Battery replacement without tools
- > Front-access servicing

Economy

- > Input power factor correction
- > Temperature-compensated battery charging
- > Efficiency: up to 96%

Simplified Installation

- > Wiring connections
- > Busbar Connections
- > Wheels

Approvals

- > Designed and built according to UL, IP, ANSI, IEEE

Manageability

- > Built in Web/SNMP management & environmental monitoring
- > LCD display
- > Audible alarms

Options

- > Up to 4 External Runtime Frame with Batteries
- > Parallel Maintenance Bypass Panel- Wall mount
- > Single-Unit Maintenance bypass-Wall Mount
- > Empty Battery Frame for third party Batteries
- > Empty Frame for third party Transformers

Typical Applications

- > Commercial Buildings: Shop floors, Hotels, Convention Centers
- > Transportation and Infrastructures
- > Pharmaceutical and Chemical plants
- > Semiconductor plants
- > Food & beverage plants
- > Other industrial facilities and process plants

Support & Service

- > Start-Up included
- > Worldwide support and after-sales services



4 units in parallel

MGE Galaxy 3500 - Features & Benefits

Reduced Total Cost of Ownership

> Up to 96% Efficiency

Minimizes energy loss and operating costs over time

> Optimized footprint

Allows for a wide range of uses in Electrical rooms and up to 60% space saving



> Reduced Electrical infrastructure rating requirements

Reduced cost for wiring, transformers, generators

> Input power factor correction

Reduces installation costs

Galaxy 3500 30kVA Efficiency

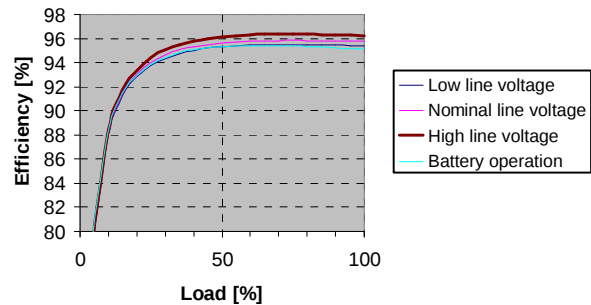

User-replaceable air filters



IP51 enclosure

Rugged Industrial Environments

> Sturdy Enclosure

2mm heavy gate Steel front cover and frame design.

> Easy replaceable air filters

Prevent dust and debris from affecting UPS performance (arrestance value of 80% as per Ashrae 52.1)

> IP 51

Drip shield that prevents falling dirt and dripping liquids from entering the UPS

> Floor anchoring

Prevent the UPS from tilting

> Wheels

Allow the UPS easily to be rolled into place

Options

> External Runtime Frame with Batteries

Adds additional runtime configuration with or without Breaker

> Single or Parallel-Unit Bypass Panel, wall-mounted

Provides space savings and turnkey solution for parallel configurations

> Empty Battery Frame for Third-party Batteries or Transformers

Line up and match cabinet for third party batteries and transformers

> Communication cards

SNMP card supplied with the product, Optional cards available for additional features



Empty Battery Frame



Communication Cards

APC

by Schneider Electric

Technical Specifications

Rated Power (kVA/Kw)	10/8		15/12		20/16		30/24		40/32	
Normal AC supply input										
Input voltage (V)	380/400/415 V (Three phase + Neutral)									
Frequency (Hz)	40 – 70 Hz									
Input Power Factor	>0.99 at load>50%									
THDI	<5% at full load									
Input Voltage Tolerance Utility Operation	304V to 477V at full load, 200V to 477V at half load (For 400 V)									
Dual Mains Input	Yes									
Input Voltage Tolerance Bypass	±10% standard ±4, 6, 8, 10% (programmable)									
Backfeed Protection	Built-in backfeed contactor									
Output										
Nominal Output Voltage (V)	380/400/415 V (Three phase + Neutral)									
Efficiency at Full Load (AC-AC)	95.7%		95.7%		95.3%		96.4%		96.0%	
Efficiency at 50% Load (AC-AC)	95.2%		95.7%		95.7%		96.4%		96.5%	
Efficiency DC-AC nominal Battery voltage	94.7%		94.7%		94.8%		94.8%		94.8%	
Load Power Factor	0.5 leading to 0.5 lagging									
Output Frequency	Mains synchronized in normal operation 50Hz ± 0.05% free-running									
Overload Capacity Utility Operation	125% for 10 minutes, 150% for 60 seconds									
Overload Capacity Battery Operation	150% for 60 seconds									
V THD	<2%from 0 to 100% linear load, <3.5% full non-linear load									
Output Voltage Tolerance	±1% static, ±5% at 100% load step									
Communication and Management										
Communication Interface	Network Management Card with Environmental Monitor									
Control Panel	Power View multi-function LCD, status and control console									
Emergency Power Off (EPO)	Yes									
Dimensions and Weight										
Dimensions (HxWxD) Narrow Tower	1490x352x838 mm									
Dimensions (HxWxD) Wide Tower	1490x523x838 mm									
Maximum Weight (kg) - Narrow Tower	214 kg		402 kg							
Maximum Weight (kg) - Wide Tower	443 kg		472 kg				656 kg		662kg	
Color	Metallic Gray (RAL 9023)									
Protection										
Surge	IEC61000-4-5, EN50091-2									
Thermal	Yes									
Short Circuit	Yes									
Regulatory										
Safety	IEC/EN62040-1-1 and EN60950									
EMC/EMI/RFI	EN50091-2, IEC 62040-2									
Approvals	CE									
Environmental										
Operating Temperature	0°C to 40°C									
Storage Temperature	-15°C to 45°C									
Relative Humidity	0 to 95% non-condensing									
Operating Elevation	0 to 1,000m									
Storage Elevation	0 to 15,000m									
Max. Audible Noise at 1m from unit	<43.3 dBA at <70% load						<46.2 dBA at <70% load			
Protection Class	IP51									