

Human/Machine Interfaces

Catalogue
2012



Vijeo
Designer



Intelligent
DataService

Schneider
Electric

-
- 1 - Operator dialogue terminals**
 - Magelis™ Small Panels
 - Magelis Advanced Panels
 - USB tower lights compatible with HMI terminals
 - 2 - HMI Controllers**
 - Magelis HMI Controllers
 - Magelis XBT GT/GK Advanced Panels with control function
 - SoMachine software suite
 - 3 - Industrial PCs**
 - PC Panels Magelis Smart and Compact iPC
 - Magelis Panel PC and BOX PC
 - Magelis iDisplay flat screens
 - 4 - HMI software**
 - Vijeo Designer™ Lite configuration software
 - Vijeo Designer configuration software
 - 5 - Appendices**
 - Technical appendices
 - Product references index

Architectures, connections to automation systems

- **Presentation** page 1/2

Magelis™ Small Panels

- Selection guide** page 1/4

■ **Magelis STO, STU Small Panels**

- Presentation page 1/6
- Magelis STO Small Panels: 3.4" page 1/8
- Magelis STU Small Panels: 3.5", 5.7" page 1/9
- Separate components page 1/11

■ **Magelis XBT N, XBT R, XBT RT Small Panels**

- Presentation page 1/12
- Magelis XBT N Small Panels page 1/18
- Magelis XBT R Small Panels page 1/19
- Equivalent product table - Magelis XBT P and XBT R page 1/20
- Magelis XBT RT Small Panels page 1/22

■ **Separate components for Magelis STO / STU and**

- XBT N / XBT R / XBT RT** page 1/23

Magelis™ Advanced Panels

- Selection guide for Optimum Advanced Panels** page 1/28

- Selection guide for Standard Advanced Panels** page 1/30

■ **Optimum Advanced Panels:**

- General page 1/34
- Magelis GTO: 3.5", 5.7", 7 wide, 7.5", 10.4", 12.1" page 1/43

■ **Standard Advanced Panels:**

- General page 1/44
- Magelis XBT GT Advanced Panels: 3.8", 5.7", 7.5", 10.4", 12.1" page 1/59
- Magelis XBT GK Advanced Panels: 5.7", 10.4" page 1/60
- Magelis XBT GH Advanced Panels: 5.7" page 1/60
- Magelis XBT GTW Advanced Panels: 10.4", 12", 15" page 1/61

- **Separate components** page 1/62

- **Wiring system** page 1/71

- **Equivalent product tables** page 1/75

Harmony® monolithic tower lights

- **Presentation** page 1/76

- **Harmony XVGU Ø 60 USB tower lights** page 1/78

■ **Compatibility with Magelis Advanced Panels and**


- HMI controllers** page 1/79

Presentation

Magelis™ operator dialogue terminals communicate with automation system equipment:

- Via serial link
- By means of integration into an Ethernet TCP/IP architecture

Communication via serial link

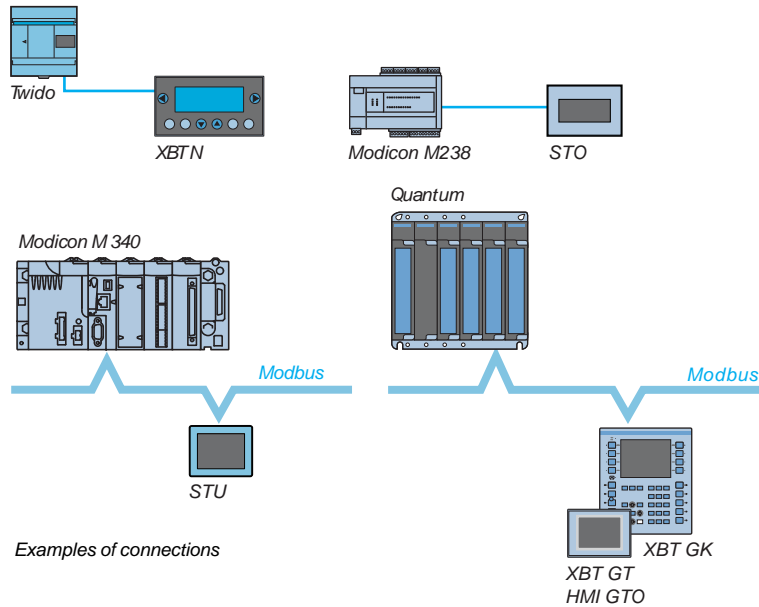

All Magelis terminals feature an integrated RS 232 C or RS 422/485 asynchronous serial link.


Use of the Uni-TE or Modbus protocol makes it easy to set up communication with Schneider Electric PLCs.

Third-party protocols enable connection to PLCs offered by major manufacturers on the market:

- DF1, DH485 for Allen-Bradley PLCs
- SysmacWay for Omron PLCs
- MPI/PPI for Siemens Simatic S7 PLCs
- Mitsubishi Melsec FX PLC

Presentation (continued)


Integration into an architecture with Ethernet TCP/IP network

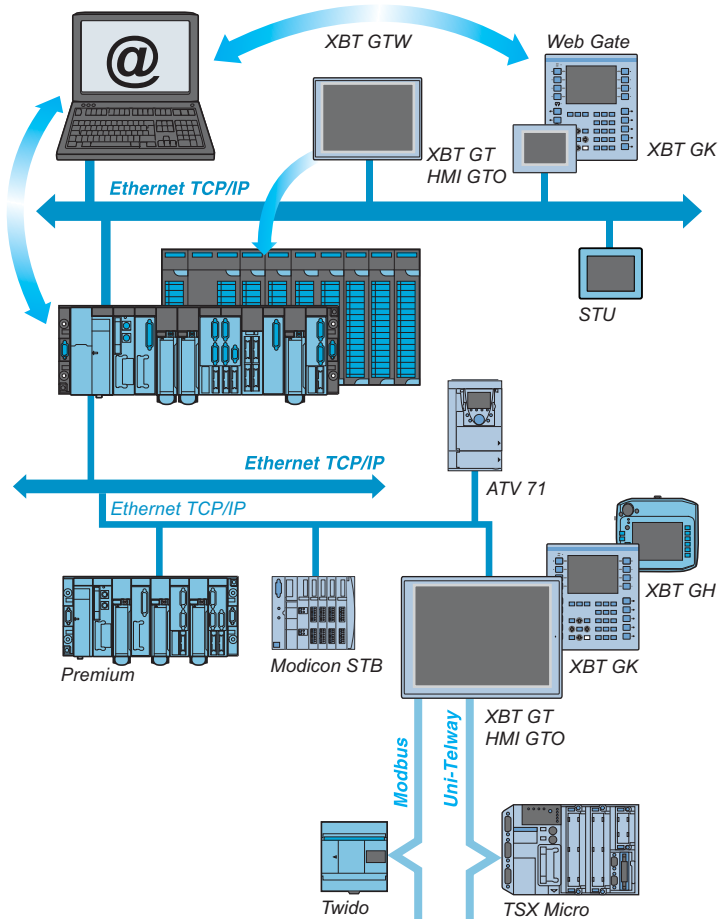




Automation platforms provide transparent routing of Uni-TE or Modbus messages from a TCP/IP network to a Uni-TE or Modbus network and vice versa.

The various services offered for the terminals are:

- **Modbus TCP/IP messaging** (for XBT GK, XBT GH, XBT GTW, XBT GT and HMI GTO, access with Ethernet TCP/IP Modbus protocol)
- **Browse function** with XBT GTW or standard PC
- **Web Gate function:** Diagnostics to remotely control the application
- **FTP server:** Transfer of data files with the terminal
- **Data Sharing function:** Data exchange on Ethernet between 8 terminals (maximum)
- **E-mail function**

Applications		Display of graphic pages		
Type of terminal		Small Panels with touch screen		
				
Display	Type	Monochrome STN LCD (200 x 80 pixels), backlit - Green, orange and red, or - White, pink and red		
	Capacity	3.4" (monochrome)	3.5" (colour)	5.7" (colour)
Data entry		Via touch screen		
Memory capacity	Application	16 MB Flash		
	Expansion	—		
Functions	Maximum number of pages	Limited by internal FLASH EPROM memory capacity		
	Variables per page	Unlimited		
	Representation of variables	Alphanumeric, bitmap, bargraph, gauge, curves, buttons, LEDs		
	Recipes	32 groups of 64 recipes		
	Curves	Yes, with log		
	Alarm logs	Yes		
	Real-time clock	Access to the PLC real-time clock		
	Alarm relay	—		
Communication	Buzzer	Yes		
	Asynchronous serial link	RS 232C/RS 485 (1) RS 232C using Zelio protocol (2)	RS 232C/RS 485	
	Downloadable protocols	Uni-TE, Modbus and for PLC brands: Allen-Bradley, Omron, Mitsubishi, Siemens		
	Printer link	USB for serial or parallel printer		
	USB ports	1 host type A and 1 device type mini-B		
Development software	Operating system	Vijeo Designer (on Windows XP Professional and Windows 7 Business 32-bit and 64-bit)		
		Magelis		
References		HMI STO 5●●	HMI STU 655	HMI STU 855
Page		1/10		



Display of text messages and/or semi-graphic pages		Display of text messages and/or semi-graphic pages Control and configuration of data	
Small Panels with keypad		Small Panels with keypad	Small Panels with touch screen and keypad
			
Green backlit monochrome LCD, height 5.5 mm or Green, orange or red backlit monochrome LCD, height 4.34...17.36 mm		Green, orange or red backlit monochrome LCD, height 4.34...17.36 mm	Green, orange or red backlit monochrome matrix LCD (198 x 80 pixels), height 4...16 mm
2 lines of 20 characters or 1 to 4 lines of 5 to 20 characters (monochrome)		1 to 4 lines of 5 to 20 characters (monochrome)	2 to 10 lines of 5 to 33 characters (monochrome)
Via keypad with 8 keys (4 customizable)		Via keypad with ■ 12 function keys or numeric entry (depending on context) ■ 8 service keys	Via keypad with ■ 4 function keys ■ 8 service keys Via touch screen and keypad with ■ 10 function keys ■ 2 service keys
512 KB Flash –		512 KB Flash EPROM	
128/200 application pages 256 alarm pages 40...50		128/200 application pages 256 alarm pages 40...50, bargraph, buttons, LEDs	200 application pages 256 alarm pages 50
Alphanumeric – Yes Yes (5)		Alphanumeric – Yes Yes (5)	Alphanumeric, bargraph, buttons, LEDs – Yes (4)
Access to the PLC real-time clock – –		Access to the PLC real-time clock – –	
RS 232C/RS 485			
Uni-TE, Modbus and for PLC brands: Allen-Bradley, Omron, Mitsubishi, Siemens			
RS 232C serial link (5)			
– –			
Vijeo Designer Lite (on Windows 2000 Professional, Windows XP Professional and Windows Vista Business 32-bit) Magelis			
XBT N ●●●●		XBT R ●●●	XBT RT ●●●
1/18 (4) Only XBT RT511. (5) Depending on model.		1/19	1/22

More technical information on www.schneider-electric.com

1



Magelis STO 3.4" Small Panel



Magelis STU 3.5" Small Panel



Magelis STU 5.7" Small Panel



Exploded view of Magelis STU Small Panel: Simple installation using 22 mm diameter hole

Presentation

The Magelis Small Panels offer includes the following touch screen terminals:

- Magelis STO, with 3.4" monochrome screen, available with 2 different types of backlighting:
 - Green, orange, red
 - White, pink, red
- Magelis STU, with 3.5" and 5.7" TFT colour screens.

Operation

The features of Magelis STO and STU terminals draw on key technological innovations:

- All Magelis STO and STU models are equipped with:
 - 2 USB V2.0 ports for data transfer
- Magelis STU and STO 531/532 models feature:
 - 1 RJ45 port, enabling integration of an Ethernet TCP/IP network and the use of the services associated with this (in particular, the Web Gate function)
- The Magelis STO 501 model features:
 - 1 RS 232C serial link port (9-way removable screw terminal block), enabling direct communication with the Zelio Logic SR2/SR3 range of controllers (see page 1/7)

No panel cut-out required to install Magelis STU models

No panel cut-out is required to install a Magelis STU Small Panel. All you need to do is drill a hole measuring 22 mm in diameter - just as if you were installing a pushbutton.

The front module (comprising the screen) is connected to the rear module (comprising the terminals and connectors). The two modules are fixed together via a hole measuring 22 mm in diameter.




Display of a video sequence

Configuration

Magelis STO/STU terminals can be configured using Vijeo Designer software in a Windows XP Professional or Windows 7 Business (32-bit and 64-bit) environment.

Vijeo Designer software boasts an advanced user interface with many configurable windows, enabling operator dialogue projects to be developed quickly and easily.

See page 4/8.



Example of serial link architecture

Communication


Magelis STO/STU terminals communicate with PLCs via an integrated serial link, using the following communication protocols:

- **Schneider Electric** (Uni-TE, Modbus)
- **Third-party**: Mitsubishi Electric, Omron, Allen-Bradley and Siemens

The Magelis STO 501 terminal is dedicated exclusively to communication with Zelio Logic SR2/SR3 range controllers.

It communicates with these controllers via a direct connection cable SR2 CBL 09 (see page 1/25), using Zelio protocol, which is included in Vijeo Designer V6.1.


Magelis STU and STO 531/532 terminals are connected on Ethernet TCP/IP networks via Modbus TCP or a third-party protocol.

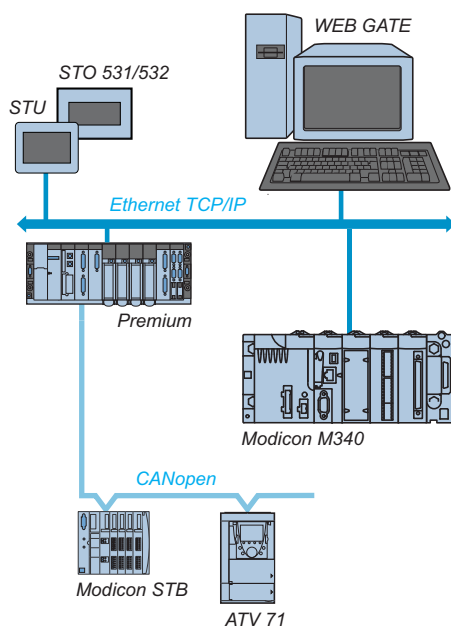

Example of Ethernet TCP/IP network architecture

Description


Magelis STO 3.4" Small Panels

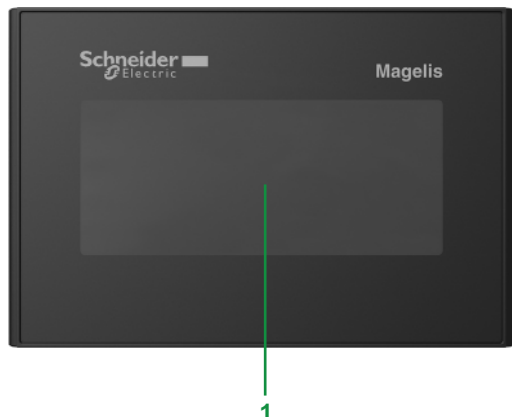

Front panel

The front panels of Magelis STO Small Panels comprise:

- 1 A touch screen for displaying synoptic views (3.4" backlit monochrome) with:
 - Green, orange or red backlighting for STO 511, STO 531 and STO 501 terminals
 - White orange or red backlighting for STO 512 and STO 532 terminals

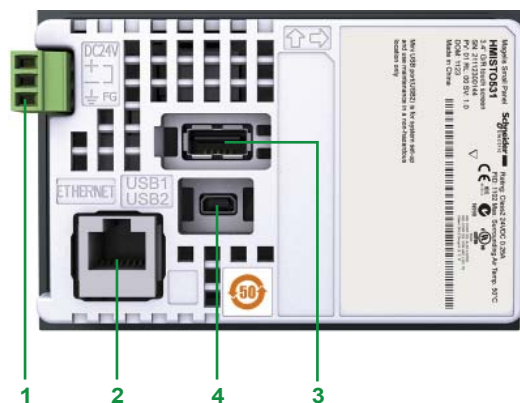


Magelis STO 511/512/531/532 Small Panels

Rear panel

Magelis STO Small Panels have the following on the rear panel:


- 1 A removable screw terminal block for 24 V $\overline{\text{---}}$ power supply
- 2 A connector for connecting to PLCs or controllers, depending on the terminal model:
 - Magelis STO 511/ 512: An RJ45 (COM1) connector for RS 232C or RS 485 serial link
 - Magelis STO 531/532: An RJ45 (ETHERNET) connector for Ethernet 10BASE-T/ 100BASE-TX link
 - Magelis STO 501: A 9-way removable screw terminal block (COM1) for RS 232C serial link using Zelio protocol
- 3 A USB type A host connector for:
 - Connection of a peripheral device
 - Connection of a USB memory stick
 - Application transfer
- 4 A USB mini-B device connector for application transfer

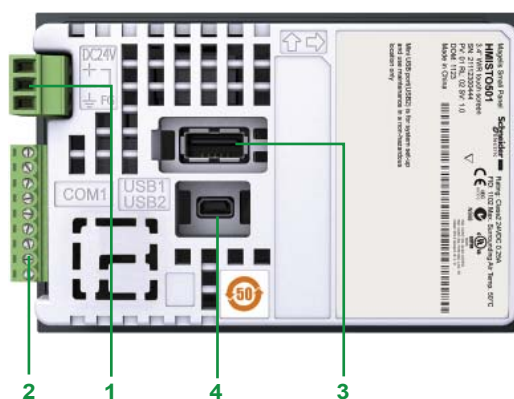

Magelis STO 501 Small Panel

Description


Magelis STU 3.5" and STU 5.7" Small Panels

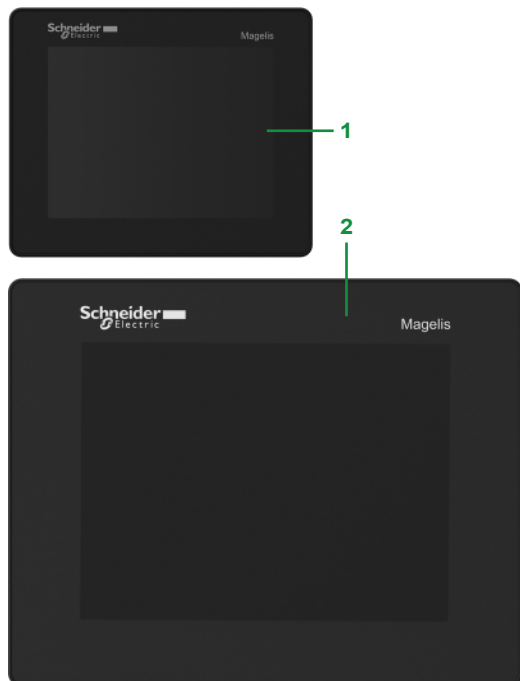

Front module

The front panels of Magelis STU Small Panels comprise, depending on the model:


- 1 Magelis STU 655: A touch screen for displaying synoptic views (3.5" colour TFT)
- 2 Magelis STU 855: A touch screen for displaying synoptic views (5.7" colour TFT)

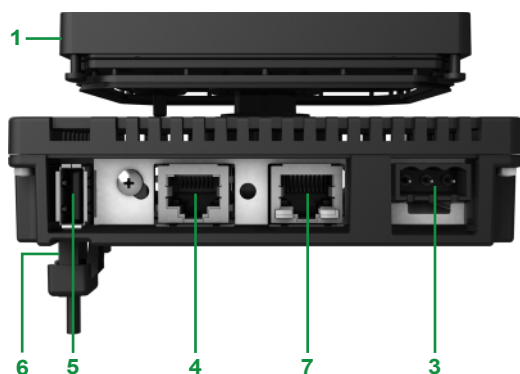

Rear of product

Magelis STU 655 and Magelis STU 855 Small Panels have the following on the rear:

- 3 A removable screw terminal block for 24 V $\overline{\text{---}}$ power supply
- 4 An RJ45 connector for RS 232C or RS 485 serial link connection to PLCs (COM1)
- 5 A USB type A host connector for:
 - ☐ Connection of a peripheral device
 - ☐ Connection of a USB memory stick
 - ☐ Application transfer
- 6 A USB mini-B device connector for application transfer (on the left-hand side)
- 7 An RJ45 connector for the Ethernet TCP/IP 10BASE-T/100BASE-TX link

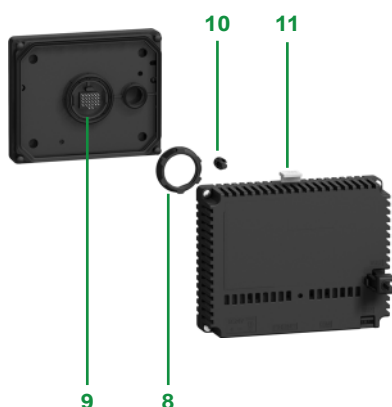

Fixing system

A Magelis STU Small Panel is made up of a front module (comprising the screen) and a rear module (comprising the CPU plus terminals and connectors). The two modules are fixed together via a hole measuring 22 mm in diameter. The fixing system contains the following elements:

- 8 An fixing nut
- 9 A seal
- 10 An anti-rotation tee (can be used as an option)
- 11 A release mechanism: simply press to separate the two modules once they have been fixed together

Operator dialogue terminals

Small Panels with touch screen

Magelis™ STO, STU

1



HMI STO 511

Magelis STO monochrome touch screen terminals

3.4" screen

Type of screen	Number of ports	Application memory capacity	Compact Flash memory	Embedded Ethernet	Reference	Weight kg
STN Green, orange, red	1 COM1 (1) 2 USB	16 MB	No	–	HMI STO 511	1.000
	1 ETHERNET (2) 2 USB	16 MB	No	1	HMI STO 531	1.000
STN White, pink, red	1 COM1 (1) 2 USB	16 MB	No	–	HMI STO 512	1.000
	1 ETHERNET (2) 2 USB	16 MB	No	1	HMI STO 532	1.000
STN Green, orange, red	1 COM1 (1) 2 USB	16 MB	No	–	HMI STO 501	1.000



HMI STU 655

Magelis STU colour touch screen terminals

Type of screen	Number of ports	Application memory capacity	Compact Flash memory	Embedded Ethernet	Reference	Weight kg
3.5" screen						
TFT	1 COM1 (1) 1 ETHERNET (2) 2 USB	16 MB	No	1	HMI STU 655	1.000



HMI STU 855

5.7" screen

TFT	1 COM1 (1) 1 ETHERNET (2) 2 USB	16 MB	No	1	HMI STU 855	–
-----	---------------------------------------	-------	----	---	-------------	---

Software

Configuration software

Description	Operating system	Reference	Weight kg
Vijeo Designer	Windows XP Professional Windows 7 Business (32-bit and 64-bit)	See page 4/13	–

(1) RS 232C or RS 485 serial link.

(2) Ethernet 10BASE-T/100BASE-TX link.

(3) RS 232C serial link using Zelio protocol, for direct connection to Zelio Logic SR2/SR3 controllers.

**Separate components (1)**

Description	Description/function	Compatible with	Reference	Weight kg
Accessories kit	Contains: <ul style="list-style-type: none"> ■ An anti-rotation tee ■ A USB A type clip ■ A USB mini-B type clip ■ An adaptor panel for mounting on an enclosure of 1 mm in thickness 	HMI STU 655 HMI STU 855	HMIZSUKIT	—
Protective sheets	5 peel-off sheets for protecting the screen	HMI STO 5●●	HMIZS60	—
		HMI STU 655	HMIZS61	—
		HMI STU 855	HMIZS62	—
USB clip	Holds the USB A type connection in place	HMI STO 5●●	HMIZSCLP1	—
	Holds the USB mini-B type connection in place	HMI STO 5●●	HMIZSCLP3	—

Replacement parts (2)

Description	Description/function	Compatible with	Reference	Weight kg
Nuts	Set of 10 nuts, 22 mm (front module of the HMI STU is fixed to the enclosure using a 22 mm nut (see page 1/6))	HMI STU 655 HMI STU 855	ZB5AZ901	—
Bezel key	Enables the fixing nut to be tightened	HMI STU 655 HMI STU 855	ZB5AZ905	—
Seal	Dust and damp proofs the connection between the front and rear modules of the HMI STO 5●●	HMI STO 5●●	HMIZS50	—

(1) Non-exhaustive list: other separate components are listed on pages 1/24 onwards.

(2) Non-exhaustive list: other replacement parts are listed on page 1/24.

Operator dialogue terminals

Magelis™ XBT N, XBT R Small Panels with keypad,

Magelis™ XBT RT Small Panels with touch screen and keypad

Presentation

1



XBT R411

XBT N400



XBT RT511

Magelis XBT N and Magelis XBT R/RT terminals are used to display messages and variables.

In addition, Magelis terminals XBT RT can display small graphic elements.

The various keys can be used to:

- Modify variables
- Control a device
- Navigate within the operator dialogue application

On XBT RT terminals, the touch screen can also be used to modify variables, control devices and navigate within the dialogue application.

Alarm messages can be printed out from models that have a printer port.

Operation



"Entry" customization



"Control" customization




All Magelis terminals have the same user interface:

- A configurable touch screen, on XBT RT only ("touch-sensitive" mode)
- 2 service keys (◀, ▶) configurable for contextual link or control, on XBT N/R and XBT RT ("entry"/"control" modes)
- 2 service keys (ESC, ENTER), non-configurable
- These keys are complemented by:
 - On XBT N terminals: 4 customizable service keys which can be configured as function keys ("control" mode) or service keys ("entry" mode)
 - On XBT R terminals: 4 service keys, non-configurable, and 12 function or numeric entry keys (depending on context)
 - On XBT RT terminals in "control" or "entry" mode: 4 customizable and configurable function keys 4 service keys (non-configurable)

Operator dialogue terminals

Magelis™ XBT N, XBT R Small Panels with keypad,
Magelis™ XBT RT Small Panels with touch screen and keypad

Configuration

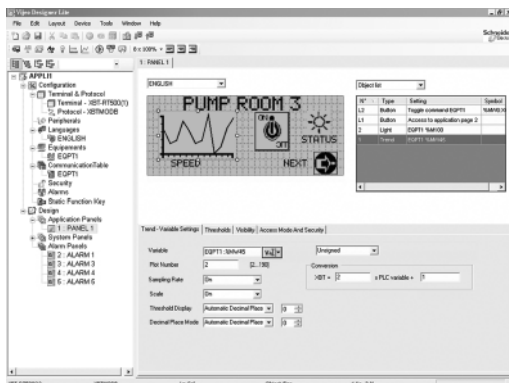

Vijeo Designer Lite

Magelis terminals can be configured using Vijeo Designer Lite software in a Windows 2000 Professional, XP Professional or Vista Business (32-bit) environment.


Vijeo Designer Lite software uses the concept of pages: each page can be viewed in its entirety. A 2, 4 or 10-line window, depending on the terminal model to be configured, is used to view the screen of this virtual terminal.

The symbol databases of TwidoSoft, PL7 and Concept applications can be imported into the Vijeo Designer Lite operator dialogue application.

See page 4/4.

Communication

XBT N terminal

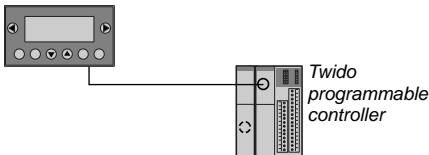


Connection example with Twido programmable controller

XBT N and XBT R/RT terminals communicate with PLCs via an integrated serial link in either point-to-point or multidrop mode, depending on the model.

The communication protocols used are those of Schneider Electric PLCs (Uni-TE, Modbus) and those of the main manufacturers on the market.

XBT N terminal

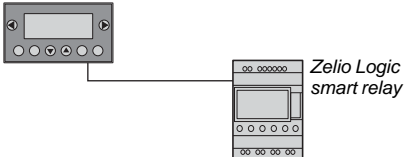

Connection example with Zelio Logic smart relay

XBT N401, XBT R411 and XBT RT 511 terminals communicate with Zelio Logic smart relays via a direct connection cable and using the Zelio protocol, which is included in Vijeo Designer Lite V1.3.

Operator dialogue terminals

Magelis™ XBT N, XBT R Small Panels with keypad,

Magelis™ XBT RT Small Panels with touch screen and keypad

1

Functions

On their front panel, XBT N/R/RT terminals have function keys and service keys (depending on how the keys have been configured for “control” and “entry” modes). XBT RT terminals feature a touch screen which can be configured in “touch-sensitive” operating mode.

“F” function keys

The function keys are defined for the whole application.

The number of function keys depends on the model:

- F1, F2, F3, F4 on XBT N
- F1...F12 on XBT R
- F1...F10 or F1...F4 according to configuration on XBT RT

They can have the following functions:

- Accessing a page
- Impulse command
- “Toggle” command
- ...

In addition, with the XBT R terminal, if the **MOD** key is pressed, the 12 function keys become numeric entry keys **1...0**, **+/-** and **..**

“R” function keys for XBT RT (“entry” mode)

The R1, R2, R3 and R4 function keys on the XBT RT are defined for the pages displayed. They can be used for:

- Accessing a page
- Memorising memory bits
- Toggling memory bits (ON/OFF)
- Resetting memory bits to 1/0

An icon can be displayed on the screen, above the **Ri** keys. This icon is defined using the Vijeo Designer Lite software.

Matrix touch screen (5 x 11 cells) for XBT RT

The touch screen can be configured to be active on XBT RT (“touch-sensitive” mode). This is used for:

- Accessing a page
- Memorising/toggling memory bits
- Modifying a numeric field via a virtual numeric keypad

Service keys

Service keys **◀**, **ESC**, **DEL**, **▼**, **▲**, **MOD**, **ENTER** and **▶** are used to modify the parameters of the automation system.





They perform the following actions:

- ESC** Cancel an entry, suspend or stop a current action, go up one level in a menu
- DEL** Delete the character selected in entry mode
- MOD** Select the variable field in which to enter data. Enable entry in the next field, on each press, from left to right and top to bottom.
- ENTER** Confirm a selection or entry, acknowledge an alarm

The “arrow” keys are used to:

- ◀ ▶**
 - ☐ Change the page within a menu
 - ☐ Display the current alarms
 - ☐ Change a digit in a variable field in which data is being entered
 - ☐ Activate the function associated with a functional link
- ▼ ▲**
 - ☐ Move up and down within a page (XBT N40●)
 - ☐ Select the value of a digit
 - ☐ Select a value from a list of choices
 - ☐ Increment or decrement the value of a variable field

Description of XBT N terminals

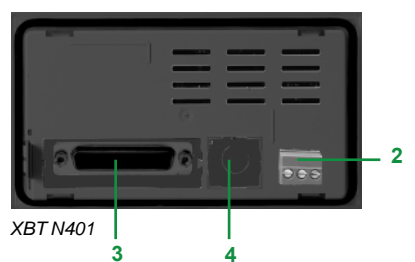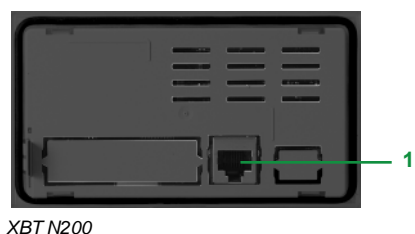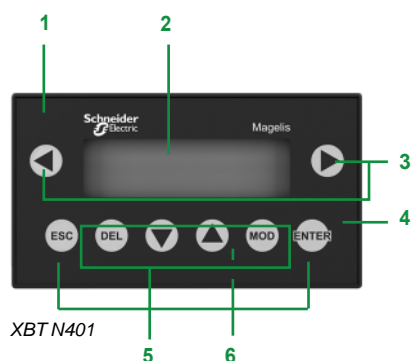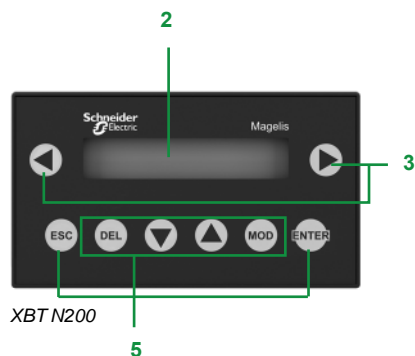

XBT N terminals comprise:

On the front panel

- 1 A communication monitoring lamp (model XBT N401)
- 2 A backlit ultra-bright LCD display: 122 x 32 pixels (matrix) or 2 lines of 20 characters (alphanumeric)
- 3 Two non-customizable command or contextual link keys
- 4 An "alarm" LED (model XBT N401)
- 5 Six service keys, four of which (framed) can be configured as function keys and customized using labels
- 6 Two system LEDs in entry mode or four LEDs that can be controlled by the PLC in control mode (model XBT N401)

Supplied separately



- A sheet of labels comprising:
 - 7 An "entry" label
 - 8 A "control" label (F1, F2, F3 and F4)
 - 9 Four customizable blank labels
- Two spring clips for fixing the terminal on the panel

On the rear panel

XBT N200/N400 terminals


- 1 An RJ45 connector for point-to-point serial link and connection for 5 V power supply (supplied by PLC)

XBT N401/N410/NU400 terminals


- 2 A removable screw terminal block for 24 V external power supply
- 3 A 25-way female SUB-D connector for multidrop serial link
- 4 An 8-way female mini-DIN connector for serial printer link (model XBT N401)

1

Description of XBT R terminals with keypad

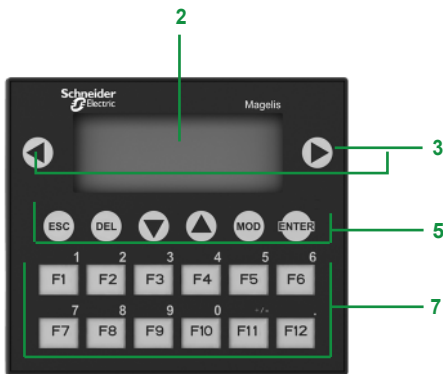

XBT R400

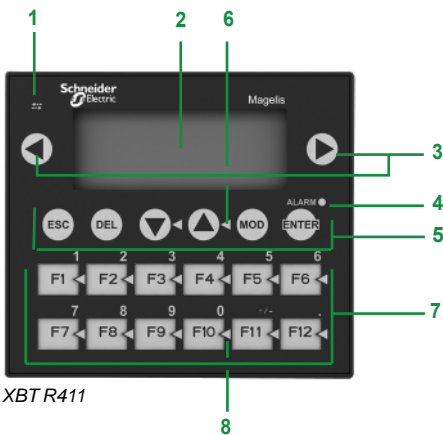


XBT R411

XBT R terminals comprise:

On the front panel:

- 1 A communication monitoring LED (model XBT R411)
- 2 A backlit ultra-bright LCD display: 122 x 32 pixels (matrix)
- 3 Two non-customizable command or contextual link keys
- 4 An "alarm" lamp (model XBT R411)
- 5 Six service keys
- 6 Two system LEDs (model XBT R411)
- 7 Twelve function or numeric entry keys (depending on context), customizable using labels
- 8 Twelve lamps (for model XBT R411), that can be controlled by the PLC


Supplied separately:

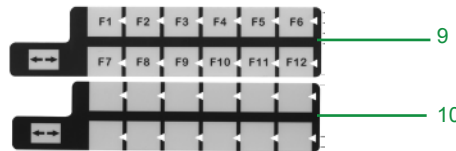

- A sheet of labels comprising:
 - 9 A "control" label (F1...F12)
 - 10 Two customizable blank labels
- Four spring clips for fixing the terminal on the panel



XBT R400

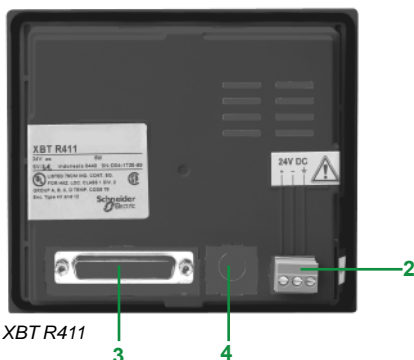

XBT R411

On the rear panel

XBT R400 terminals

- 1 An RJ45 connector for point-to-point serial link and connection for 5 V power supply (supplied by PLC)



XBT R410/R411 terminals

- 2 A removable screw terminal block for 24 V external power supply
- 3 A 25-way female SUB-D connector for multidrop serial link
- 4 An 8-way female mini-DIN connector for serial printer link (model XBT R411)


Operator dialogue terminals

Magelis™ XBT RT Small Panels with touch screen and keypad

Description of XBT RT terminals with touch screen and keypad

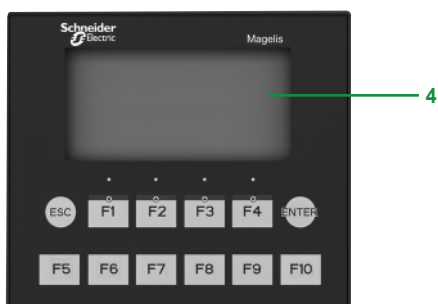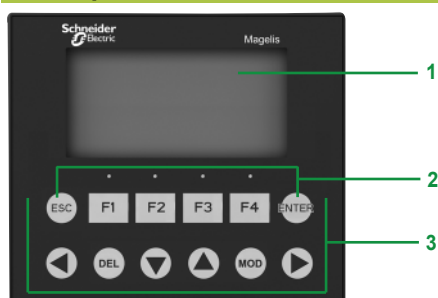


XBT RT500

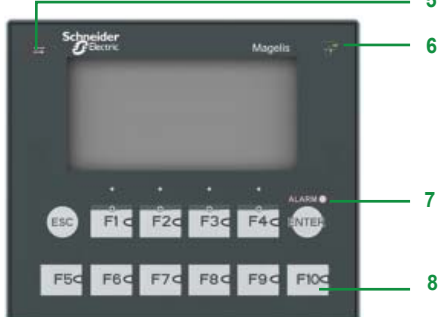

XBT RT511



XBT RT500

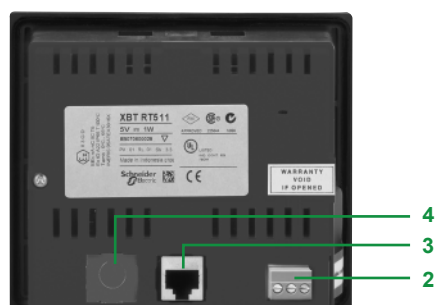

XBT RT511

XBT RT terminals comprise:

On the front panel:


XBT RT terminals

- 1 An ultra-bright backlit LCD display: 198 x 80 pixels (matrix)
- 2 Two service keys
- 3 Function or service keys which can be configured and customized using labels
- 4 Matrix touch screen (11 x 5 cells)

XBT RT511 terminal

- 5 A communication monitoring LED
- 6 A "touch panel or keys being pressed" LED
- 7 An "alarm" LED
- 8 Six or ten lamps, depending on the configuration, that can be controlled by the PLC

Supplied separately:

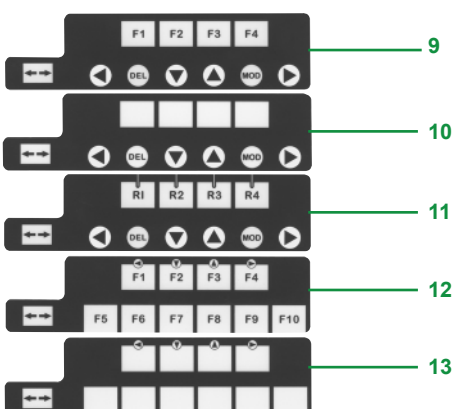

■ 2 sheets of labels comprising:

- 9 A configurable "control" label (F1...F4)
- 10 A customizable blank "control" label
- 11 An "entry" label (R1...R4)
- 12 A "touch-sensitive" label (F1...F10)
- 13 Two customizable blank "touch-sensitive" labels

On the rear panel

XBT RT500 terminal

- 1 An RJ45 connector for point-to-point serial link and connection for 5 V power supply (supplied by PLC)

XBT RT511 terminal

- 2 A removable screw terminal block for 24 V external power supply
- 3 An RJ45 connector for multidrop serial link
- 4 An 8-way female mini-DIN connector for serial printer link

1



XBT N200



XBT N400/N410/NU400



XBT N401

Magelis XBT N Small Panels

Downloadable exchange protocol	Compatible PLCs	Supply voltage	Type of screen	Reference	Weight kg
Terminal with 2 lines of 20 characters (with alphanumeric screen)					
Uni-TE, Modbus	Twido, Nano, TSX Micro, Premium, Modicon M340	5 V $\overline{\text{---}}$ via PLC terminal port	Green backlit LCD	XBT N200	0.360
Terminals with 4 lines of 20 characters (with matrix screen)					
Uni-TE, Modbus	Twido, Nano, TSX Micro, Premium, Modicon M340	5 V $\overline{\text{---}}$ via PLC terminal port	Green backlit LCD (122 x 32 pixels)	XBT N400	0.360
	Twido (1), Nano, TSX Micro, Premium, TSX series 7, Momentum, Quantum Other Modbus slave devices, Modicon M340	24 V $\overline{\text{---}}$ external supply	Green backlit LCD (122 x 32 pixels)	XBT N410	0.380
Uni-TE, Modbus	Twido (1), Nano, TSX Micro, Premium, TSX series 7, Momentum, Quantum Other Modbus slave devices, Modicon M340	24 V $\overline{\text{---}}$ external supply	Green, orange and red backlit LCD (2) (122 x 32 pixels)	XBT N401	0.380
Zelio	Zelio Logic				
Modbus	TeSys model U motor starters (3) Altivar drives	24 V $\overline{\text{---}}$ external supply	Green backlit LCD (122 x 32 pixels)	XBT NU400	0.380

Software

Description	Operating system	Reference
Configuration software Vijeo Designer Lite	Windows 2000 Professional, XP Professional and Vista Business (32-bit)	See page 4/7

Accessories (4)

Description	Details	For use with	Reference	Weight kg
Accessory for flush mounting	Kit for applications requiring a higher degree of protection or customization of the control desk, using flat inner insulation (not included)	All XBT N	XBT ZN01	—
Protective sheets	10 peel-off sheets	All XBT N	XBT ZN02	—
Sheets of re-usable labels	10 sheets of 6 labels	XBT N200/400	XBL YN00	—
		XBT N401	XBL YN01	—
		XBT NU400		—
Mechanical adaptors for substitution of XBT H	From XBT H0●2●1/H0●1010 to XBT N410 From XBT H811050 to XBT N410	—	XBT ZNCO	—

Connection cables and accessories (5)

Description	Compatibility	Types of connector	Physical link	Protocol	Length	Reference	Weight kg
Adaptor cable	XBT N200 XBT N400 (6)	RJ45-RJ45	RS 232C RS 485	Modbus, Uni-TE	0.1 m	XBT ZN999	—

(1) Connection via integrated port or optional serial port on the Twido programmable controller.

(2) Also available with 4 signalling LEDs.

(3) Factory preloaded application for monitoring, diagnostics and adjustment of 1 to 8 TeSys model U motor starters.

(4) For other accessories, see page 1/24.

(5) For other connection cables and accessories, see pages 1/24 to 1/27.

(6) Adaptor **XBT ZN999** is designed for use with **XBT N200/N400** terminals (new version) and cable **XBT Z978** (replaced by **XBT Z9780**), or with **XBT N200/N400** terminals (old version) and the new **XBT Z9780** cable.


Note: The new version of the XBT N terminal can be distinguished from the old version by its exterior, as it features the **Schneider Electric** logo on the front panel (on the left above the screen).




XBT R400/R410



XBT R411



XBT ZR01



XBT ZR02

Magelis XBT R Small Panels

Downloadable exchange protocol	Compatible PLCs	Supply voltage	Type of screen	Reference	Weight kg
Terminals with 4 lines of 20 characters (with matrix screen)					
Uni-TE, Modbus	Twido, Nano, TSX Micro, Premium, Modicon M340	5 V $\overline{\text{---}}$ via PLC terminal port	Green backlit LCD (122 x 32 pixels)	XBT R400	0.550
	Twido (1), Nano, TSX Micro, Premium, TSX series 7, Momentum, Quantum Other Modbus slave devices, Modicon M340	24 V $\overline{\text{---}}$ external supply	Green backlit LCD (122 x 32 pixels)	XBT R410	0.550
Uni-TE, Modbus	Twido (1), Nano, TSX Micro, Premium, TSX series 7, Momentum, Quantum Other Modbus slave devices, Modicon M340	24 V $\overline{\text{---}}$ external supply	Green, orange and red backlit LCD (2) (122 x 32 pixels)	XBT R411	0.550
Zelio	Zelio Logic				

Software

Description	Operating system	Reference	
Configuration software Vijeo Designer Lite	Windows 2000 Professional, XP Professional and Vista Business (32-bit)	See page 4/7	—

Accessories (3)

Description	Details	For use with	Reference	Weight kg
Accessory for flush mounting	Kit for applications requiring a higher degree of protection or customization of the control desk, using flat inner insulation (not included)	All XBT R	XBT ZR01	—
Protective sheets	10 peel-off sheets	All XBT R	XBT ZR02	—
Sheets of re-usable labels	10 sheets of 6 labels	XBT R400/R410	XBL YR00	—
		XBT R411	XBL YR01	—
Mechanical adaptor for substitution of XBT P	From XBT P01●010/P02●010 to XBT R410	—	XBT ZRCO	—
	From XBT P02●110 to XBT R411			—


(1) Connection via integrated port or optional serial port on the Twido PLC.

(2) Also available with 16 signalling LEDs.

(3) For other accessories, see pages 1/24 to 1/27.

1

Equivalent product table - XBT P to XBT R terminals

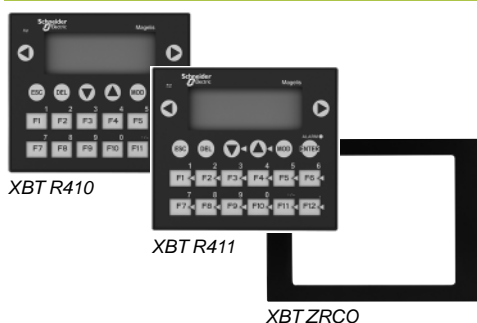

Old range XBT P	XBT R range	Mechanical adaptor (1)
XBT P011010	XBT R410	XBT ZRCO
XBT P012010	XBT R410	XBT ZRCO
XBT P021010	XBT R410	XBT ZRCO
XBT P021110	XBT R411	XBT ZRCO
XBT P022010	XBT R410	XBT ZRCO
XBT P022110	XBT R411	XBT ZRCO

(1) Mechanical adaptor for mounting XBT R terminal in place of the substituted XBT P terminal.

Equivalent product table - Cables for connection to Schneider Electric products

Summary		
Old range XBT P	XBT R range	
Type of link	Type of link	Cable
Serial port, 25-way SUB-D RS 232C/RS 485/RS 422	Serial port, 25-way SUB-D RS 232C/RS 485	Existing cable (see below)
Printer port, 9-way SUB-D (model XBT P02110)	Printer port, 8-way mini-DIN (model XBT R411)	XBT Z926 (new cable)

Equivalent product table - Cables

Old range XBT P				XBT R range			
Type of terminal	Type of link	Length	Reference	Type of terminal	Type of link	Length	Reference
Twido, Modicon TSX Micro, Modicon Premium, 8-way mini-DIN terminal port, Uni-TE (V1/V2), Modbus protocol							
XBT P	RS 485 serial port, 25-way SUB-D	2.5 m	XBT Z968	XBT R	RS 485 serial port, 25-way SUB-D	2.5 m	XBT Z968
		5 m	XBT Z9681			5 m	XBT Z9681
		2.5 m, angled	XBT Z9680			2.5 m, angled	XBT Z9680
Modicon Premium with TSX SCY 2160●, 25-way female SUB-D connector, Uni-TE (V1/V2) protocol							
XBT P	RS 485 serial port, 25-way SUB-D	2.5 m	XBT Z918	XBT R	RS 485 serial port, 25-way SUB-D	2.5 m	XBT Z918
Modicon Quantum, 9-way male SUB-D connector, Modbus protocol							
XBT P	RS 232C serial port, 25-way SUB-D	2.5 m	XBT Z9710	XBT R	RS 232C serial port, 25-way SUB-D	2.5 m	XBT Z9710
Advantys STB, HE13 connector (network interface module, NIM), Modbus protocol							
XBT P	RS 232C serial port, 25-way SUB-D	2.5 m	XBT Z988	XBT R	RS 232C serial port, 25-way SUB-D	2.5 m	XBT Z988
Modicon Momentum M1, RJ45 connector (port 1), Modbus protocol							
XBT P	RS 232C serial port, 25-way SUB-D	2.5 m	XBT Z9711	XBT R	RS 232C serial port, 25-way SUB-D	2.5 m	XBT Z9711
TeSys U starters, ATV 31/61/71 drives, ATS 48 starters, RJ45 connector, Modbus protocol							
XBT P	RS 485 serial port, 25-way SUB-D	2.5 m	XBT Z938	XBT R	RS 485 serial port, 25-way SUB-D	2.5 m	XBT Z938
LT6 P multifunction protection relay, 9-way female SUB-D connector, Modbus protocol							
XBT P	RS 232C serial port, 25-way SUB-D	2.5 m	XBT Z938	XBT R	RS 232C serial port, 25-way SUB-D	2.5 m	XBT Z938

Equivalent product table - Cables for application transfer to PC and printer cable

Old range XBT P				XBT R range			
Type of terminal	Type of link	Length	Reference	Type of terminal	Type of link	Length	Reference
Cables for application transfer to PC							
XBT P	25-way SUB-D/ 9-way SUB-D	2.5 m	XBT Z915	XBT R	25-way SUB-D/ 9-way SUB-D	2.5 m	XBT Z915
	25-way SUB-D/USB	2.5 m	XBT Z915 + adaptor SR2 CBL 06		25-way SUB-D/ USB	2.5 m	XBT Z915 + adaptor SR2 CBL 06
Serial printer cable							
XBT P	Printer port, 9-way SUB-D	2.5 m	XBT Z936	XBT R	Printer port, mini-DIN 8	2.5 m	XBT Z926

Compatibility table - Downloadable third-party protocols

PLC brand	Compatibility		Protocol name
	XBT P	XBT R	
Allen-Bradley	■	■	DF1/DH485
GE Fanuc	■	—	SNPX
Omron	■	■ (on RS 232)	Sysmacway
Siemens	■	■	PPI
	■	—	AS511, 3964R, MPI

Equivalent product table - Cables for connection to third-party PLCs

Omron CQM1 & CVM1, Sysmac PLCs

Old range XBT P					XBT R range				
Type of terminal	Type of connector	Serial port	Length	Reference	Type of terminal	Type of connector	Serial port	Length	Reference
Sysmacway protocol									
XBT P	25-way SUB-D/ 9-way SUB-D	RS 232	2.5 m	XBT Z9740	XBT R	25-way SUB-D/ 9-way SUB-D	RS 232C	2.5 m	XBT Z9740

Rockwell Automation, Allen-Bradley PLCs

Old range XBT P					XBT R range				
Type of terminal	Type of connector	Serial port	Length	Reference	Type of terminal	Type of connector	Serial port	Length	Reference
DF1 protocol									
XBT P AP SLC5	25-way SUB-D/ 9-way SUB-D	RS 232C	2.5 m	XBT Z9730	XBT R AP SLC5	25-way SUB-D/ 9-way SUB-D	RS 232C	2.5 m	XBT Z9730
XBT P AP PLC5	25-way SUB-D/ 25-way SUB-D	RS 232C	2.5 m	XBT Z9720	XBT R AP PLC5	25-way SUB-D/ 25-way SUB	RS 232C	2.5 m	XBT Z9720
XBT P AP Micro-logix	25-way SUB-D/ Micro-logix 1000	RS 232C	2.5 m	XBT Z9731	XBT R AP Micro-logix	25-way SUB-D/ Micro-logix 1000	RS 232C	2.5 m	XBT Z9731
DH 485 point-to-point protocol									
XBT P AP Micro-logix	25-way SUB-D/ Micro-logix 1000	RS 232C	2.5 m	XBT Z9732	XBT R AP Micro-logix	25-way SUB-D/ Micro-logix 1000	RS 232C	2.5 m	XBT Z9732
DH 485 multidrop protocol									
XBT P SLC500 with AIC gateway	25-way SUB-D/ 9-way SUB-D	RS 232C	2.5 m	XBT Z9730	XBT R AP SLC5 with AIC gateway	25-way SUB-D/ Micro-logix 1000	RS 232C	2.5 m	XBT Z9732

Siemens, Simatic PLCs

Old range XBT P					XBT R range				
Type of terminal	Type of connector	Serial port	Length	Reference	Type of terminal	Type of connector	Serial port	Length	Reference
PPI (S7) protocol									
XBT P	25-way SUB-D/ 9-way SUB-D	RS 485	2.5 m	XBT Z9721	XBT R	25-way SUB-D/ 9-way SUB-D	RS 485	2.5 m	XBT Z9721

Equivalent product table - Connection to Uni-Telway serial link

Old range XBT P					XBT R range				
Type of terminal	Type of connector	Serial port	Length	Reference	Type of terminal	Type of connector	Serial port	Length	Reference
On subscriber socket TSX SCA 62									
XBT P	25-way SUB-D/ 15-way SUB-D	RS 485	1.8 m	XBT Z908	XBT R	25-way SUB-D/ 15-way SUB	RS 485	1.8 m	XBT Z908
On connection box TSX P ACC 01									
XBT P	25-way SUB-D/ 8-way mini-DIN	RS 485	2.5 m 5 m	XBT Z968 XBT Z9681	XBT R	25-way SUB-D/ 8-way mini-DIN	RS 485	2.5 m 5 m	XBT Z968 XBT Z9681

Equivalent product table - Connection to Modbus serial link

Old range XBT P					XBT R range				
Type of terminal	Type of connector	Serial port	Length	Reference	Type of terminal	Type of connector	Serial port	Length	Reference
On subscriber socket TSX SCA 64									
XBT P	25-way SUB-D/ 15-way SUB-D	RS 485/ RS422	1.8 m	XBT Z908	XBT R	25-way SUB-D/ 15-way SUB-D	RS 485/ RS 422	1.8 m	XBT Z908
On 8-port splitter box LU9 GC3									
XBT P	25-way SUB-D/RJ45	RS 485	2.5 m	XBT Z938	XBT R	25-way SUB-D/RJ45	RS 485	2.5 m	XBT Z938

Operator dialogue terminals

Small Panels with touch screen and keypad

Magelis™ XBT RT

1



XBT RT500



XBT RT511

Magelis XBT RT Small Panels

Downloadable exchange protocol	Compatible PLCs	Supply voltage	Type of screen	Reference	Weight kg
Terminal with 10 lines of 30 characters (with matrix screen)					
Uni-TE, Modbus	Twido, Nano, TSX Micro, Premium, Modicon M340	5 V $\overline{\text{---}}$ via PLC terminal port	Green backlit LCD (198 x 80 pixels)	XBT RT500	0.550
Uni-TE, Modbus	Twido, Nano, TSX Micro, Premium, TSX Series 7, Momentum, Quantum, other Modbus slave devices, Modicon M340	24 V $\overline{\text{---}}$ external supply	Green, orange or red backlit LCD (198 x 80 pixels) + 13 signalling LEDs + buzzer	XBT RT511	—
Zelio	Zelio Logic				


Software

Description	Operating system	Reference	
Configuration software Vijeo Designer Lite	Windows 2000 Professional, XP Professional and Vista Business (32-bit)	See page 4/7	—


Operator dialogue terminals

Small Panels

Separate components for Magelis™ XBT N, XBT R, XBT RT and Magelis™ STO, STU



XBT ZR01



XBT ZR02

Accessories ⁽¹⁾				
Description	Details	For use with	Reference	Weight kg
Accessory for flush mounting	Kit for applications requiring a higher degree of protection or customization of the control desk, using flat inner insulation (not included)	All XBT RT	XBT ZR01	–
Protective sheets	10 peel-off sheets	All XBT RT	XBT ZR02	–
Sheets of re-usable labels	10 sheets of 6 labels	XBT RT500	XBL YRT00	–
		XBT RT511	XBL YRT01	–
Mechanical adaptor for substitution XBT P/PM		–	XBT ZRCO	–

Description	Compatibility	Type of connector	Physical link	Protocol	Length m	Reference	Weight kg
Downloading adaptor ⁽²⁾	XBT RT500	RJ45-RJ45	RS 485	Modbus	0.2	XBT ZRT 999	–

(1) For other accessories, see page 1/24.
For other connection cables and accessories, see pages 1/24 to 1/27.
(2) Also included in kit XBT Z 945.

Operator dialogue terminals

Small Panels

Separate components for Magelis™ XBT N, XBT R, XBT RT and Magelis™ STO, STU

1

Accessories

Type	Compatibility	Sold in lots of	Unit reference	Weight kg
External 5 V adaptor (1)	XBT N200/N400 XBT R400 XBT RT500	1	XBT ZRT PW	–
XBT RT download adaptor (2)	XBT RT500/511	1	XBT ZRT999	–
Spring clips (replacement parts)	XBT N/R/RT/GT HMI STO	12	XBT Z3002	0.200
Power supply connector (replacement parts)	XBT N/R/RT	10	XBT Z3004	0.200
	HMI STO	5	HMI ZS PWO	–
	HMI STU	5	XBT ZG PWS1	–

Connection to PCs and printers

Used	Compatibility	Length	Peripheral side connector	Reference	Weight kg
Cables for PC connection, RS 232C serial port	XBT N401/N410/NU400 XBT R410/R411	2.5 m	9-way male SUB-D	XBT Z915	0.200
	XBT N200/N400/R400 XBT RT500/RT511	2.5 m	9-way male SUB-D and mini-DIN (PS/2)	XBT Z945	0.200
USB cable for PC connection (3)	XBT N/R/RT	–	USB type A male	TSX CUSB 485	–
	HMI STO/STU	2.5 m	USB type A male	XBT ZG935	–
	HMI STO/STU	1.8 m	USB type mini-B male	BMX XCA USB H018	0.230
XBT adaptor for USB cable	XBT N/R/RT	2 m	Set of 2 cables (RJ45/RJ45 RJ45/25-way SUB-D)	XBT Z925	–
Serial printer cables	XBT N/R/RT	2.5 m	25-way female SUB-D	XBT Z926	0.220
	HMI STO/STU	1.8 m	9-way male SUB-D	HMI ZURS	–
USB host extension cable	HMI STO/STU	2 m	USB type A male, dust and damp proof	XBT ZG USB	0.220
USB device extension cable	HMI STO/STU	2 m	USB type mini-B male, dust and damp proof	HMI ZS USBB	–

(1) Use a 5 V --- power supply: **ABL 8MEM 05040**

(2) **XBT Z945** cable included.

(3) Adaptor to be used with **XBT Z925** cable.

Operator dialogue terminals

Small Panels

Separate components for Magelis™ XBT N, XBT R, XBT RT and Magelis™ STO, STU

Cables for connecting Magelis terminals

Type of PLC to be connected	Type of connector	Physical link	Protocol	Length	Reference	Weight kg
Direct connection of XBT N/R/RT (XBT N200/N400/R400/RT500/RT511) and HMI STO/STU terminals to Schneider Electric PLCs						
Twido, Modicon Nano, Modicon TSX Micro, Modicon Premium	Mini-DIN	RS 485	Modbus/Uni-TE	2.5 m	XBT Z9780	–
				10 m	XBT Z9782 (1)	–
Modicon M340	RJ45	RS485	Modbus	2.5 m	XBT Z9980	–
				10 m	XBT Z9982 (1)	–
Direct connection of XBT N/R (XBT N410/N401/R410/R411) terminals to Schneider Electric PLCs						
Twido, Modicon Nano, Modicon TSX Micro, Modicon Premium	Terminal port, 8-way female mini-DIN	RS 485	Uni-TE (V1/V2) and Modbus	2.5 m	XBT Z968	0.180
				5 m	XBT Z9681	0.340
				2.5 m (2)	XBT Z9680	0.170
Modicon Premium with TSX SCY 2160●	25-way female SUB-D	RS 485	Uni-TE (V1/V2)	2.5 m	XBT Z918	0.230
Modicon Quantum	9-way male SUB-D	RS 232	Modbus	2.5 m	XBT Z9710	0.210
Modicon STB	HE13 (NIM)	RS 232	Modbus	2.5 m	XBT Z988	0.170
Modicon Momentum M1 (Port 1)	RJ45	RS 232	Modbus	2.5 m	XBT Z9711	0.210
Modicon M340	RJ45	RS 485	Modbus	2.5 m	XBT Z938	0.210
Direct connection of XBT N/R/RT (XBT N401/R411/RT511) terminals to Schneider Electric PLCs via the 2nd mini-DIN serial port and Vijeo Designer Lite 1.3 minimum						
Zelio Logic	Programming port (specifically for Zelio Logic)	–	Zelio	3 m	SR2 CBL 08	–
Direct connection of the HMI STO 501 terminal to Zelio Logic SR2/SR3 controllers						
Zelio Logic SR2/SR3 (3)	Programming port (specifically for Zelio Logic)	RS 232C	Zelio	2.5 m	SR2 CBL 09	–

(1) For XBT N200/N400/R400/RT500, use a cable with adaptor **XBT ZRT PW** and a 5 V \square power supply.

(2) Angled SUB-D connector.

(3) Cable included with 9-way removable screw terminal block.

Operator dialogue terminals

Small Panels

Separate components for Magelis™ XBT N, XBT R, XBT RT and Magelis™ STO, STU

1

Cables for connecting Magelis terminals (continued)

Direct connection of XBT RT500/RT511 and Magelis STO/STU terminals to Modicon STB I/O (1)

Modicon STB	HE13 (NIM)	RS 232	Modbus	2.5 m	XBT Z9715	—
-------------	---------------	--------	--------	-------	-----------	---

Direct connection of XBT (XBT NU400/N410/N401/R410/R411) terminals to Schneider Electric motor starters and drives

TeSys U, T ATV 312/32/61/71 variable speed drives ATS 48 starter Lexium 32, Preventa XPSMC	RJ45	RS 485	Modbus	2.5 m	XBT Z938	0.210
--	------	--------	--------	-------	----------	-------

Direct connection of XBT (XBT N200/N400/R400/RT500/RT511) and Magelis STO/STU terminals to Schneider Electric motor starters and drives (2)

TeSys U, T ATV 312/32/61/71 variable speed drives ATS 48 starter Lexium 32, Preventa XPSMC	RJ45	RS 485	Modbus	2.5 m	XBT Z9980	—
--	------	--------	--------	-------	-----------	---

Direct connection of XBT (XBT N410/N401/R410/R411) terminals to third-party PLCs

Allen-Bradley	SLC5	9-way male SUB-D	RS 232	DF1	2.5 m	XBT Z9730	0.210
	PLC5	25-way female SUB-D	RS 232	DF1	2.5 m	XBT Z9720	0.210
	Micro-logix	Micro-logix 1000	RS 232	DF1	2.5 m	XBT Z9731	0.210
				DH485	2.5 m	XBT Z9732	—
Mitsubishi	FX	8-way female mini-DIN	RS 232/ RS 422 converter	Melsec FX	2.5 m	XBT Z980	—
Omron	CPM1, CPM2, CJ1, CS1	9-way male SUB-D	RS 232	Sysmacway	2.5 m	XBT Z9740	0.210
Siemens	S7 (PG)	9-way male SUB-D	RS 485	PPI	2.5 m	XBT Z9721	0.210

Direct connection of the XBT RT500/RT511 and Magelis STO/STU terminal to third-party PLCs (1)

Allen-Bradley	SLC5	9-way male SUB-D	RS 232	DF1	2.5 m	XBT Z9734	—
	Micro-logix	Micro-logix 1000	RS 232	DF1	2.5 m	XBT Z9733	—
Mitsubishi	FX	8-way female mini-DIN	RS 232/ RS 422 converter	Melsec FX	2.5 m	XBT Z980 + (3)	—
Omron	CPM1, CPM2, CJ1, CS1	9-way male SUB-D	RS 232	Sysmacway	2.5 m	XBT Z9743	—
Siemens	S7 (PG)	9-way male SUB-D	RS 485	PPI	2.5 m	XBT ZG9721	0.210

(1) For XBT RT500, use a cable with adaptor XBT ZRT PW and a 5 V ⎓ power supply.

(2) For Magelis XBT N200/N400/R400/RT500, , use a cable with adaptor XBT ZRT PW and a 5 V ⎓ power supply.

(3) Adaptor XBT ZG939 to be used with cables with " + (3) " after the reference.

Operator dialogue terminals

Small Panels

Separate components for Magelis™ XBT N, XBT R, XBT RT and Magelis™ STO, STU

Cables for connecting Magelis terminals (continued)


Bus and network connections for XBT N410/N401/R410/R411 terminals

Type of bus/network	Tap-off units	Type of connector	Length	Reference	Weight kg
Uni-Telway serial link	Subscriber socket TSX SCA 62	15-way female SUB-D	1.8 m	XBT Z908	0.240
	Connection box TSX PACC 01	8-way female mini-DIN	2.5 m	XBT Z968	0.180
			5 m	XBT Z9681	0.340
			10 m	XBT Z9686	
			20 m	XBT Z9687	
			25 m	XBT Z9688	
Modbus serial link	Subscriber socket TSX SCA 64	15-way female SUB-D	1.8 m	XBT Z908	0.240
	8-port Modbus splitter box LU9 GC3, Modbus tap-off, TWD XCA ISO, TWD XCA T3RJ	RJ45	2.5 m	XBT Z938	0.210

Bus and network connections for XBT RT511 and Magelis STO/STU terminals

Type of bus/network	Tap-off units	Type of connector	Length	Reference	Weight kg
Uni-Telway serial link	Connection box TSX PACC 01	8-way female mini-DIN	2.5 m	XBT Z9780	0.180
Modbus serial link	8-port Modbus splitter box LU9 GC3, Modbus tap-off, TWD XCA ISO, TWD XCA T3RJ	RJ45	2.5 m	XBT Z9980	—

Applications	Display of text messages, graphic objects and synoptic views Control and configuration of data
Type of terminal	Optimum Advanced Panels, touch screen
Degree of protection (according to IEC 60529)	IP 65 (IP 67 with addition of a cover)

Display	Type						
	Capacity	Colour TFT LCD, backlit 320 x 240 pixels (QVGA)		Colour TFT LCD, backlit 800 x 480 pixels (WVGA)		Colour TFT LCD, backlit 800 x 480 pixels (WVGA)	
Data entry		3.5"	5.7"	7.0 Wide			
	Static function keys	Via touch screen	Via touch screen	Via touch screen			
	Dynamic function keys	6 function keys (static or dynamic)	–	8 function keys (static or dynamic)			
	Service keys	–	–	–			
	Alphanumeric keys	–	–	–			
Memory capacity	Applications	64/96 MB Flash EPROM (1)		96 MB Flash EPROM			
	Expansion	–	By 4 GB SD card (except HMI GTO2300)				
Functions	Maximum number of pages	Limited by internal Flash EPROM memory capacity	Limited by capacity of internal Flash EPROM memory or of SD card				
	Variables per page	Unlimited (8000 variables max.)					
	Representation of variables	Alphanumeric, bitmap, bargraph, gauge, tank, tank level indicator, curves, polygon, button, LED					
	Recipes	32 groups of 64 recipes comprising 1024 ingredients max.					
	Curves	Yes, with log					
	Alarm logs	Yes					
	Real-time clock	Built-in					
	Discrete I/O	–					
	Multimedia I/O	–					
	Communication	Downloadable protocols	Uni-TE (2), Modbus, Modbus TCP/IP (1) and for PLC brands: Mitsubishi, Omron, Allen-Bradley and Siemens				
Asynchronous serial link		RS 232C (COM1) and RS 485 (COM2) except HMI GTO1310: RS 232C/485 (COM1)					
USB ports		1 type A host connector + 1 mini-B connector					
Buses and networks		Ethernet TCP/IP (10BASE-T/100BASE-TX) (3), Modbus Plus and Fipway via USB gateway					
Printer link		RS 232C (COM1) serial link (4) and USB port for parallel printer					
Development software		Vijeo Designer (on Windows XP and Windows 7)					
Operating system		Magelis (333 MHz RISC CPU)					
Type of terminal		HMI GTO1300 HMI GTO1310		HMI GTO2300 HMI GTO2310		HMI GTO3510	
Page		1/43					

(1) Depending on model.

(2) Uni-TE version V2 for Twido controller and TSX Micro/Premium platform.

(3) Except HMI GTO1300 and GTO2300 (Modbus Plus and Fipway via USB gateway only).

(4) Except HMI GTO1310 (USB port for parallel printer only).


More technical information on www.schneider-electric.com


Display of text messages, graphic objects and synoptic views
Control and configuration of data

Optimum Advanced Panels, touch screen

Optimum Advanced Panels, touch screen, "Stainless Steel" version

IP 65 (IP 67 with addition of a cover)

IP 66K (Front panel with stainless steel frame) for food & beverage environment

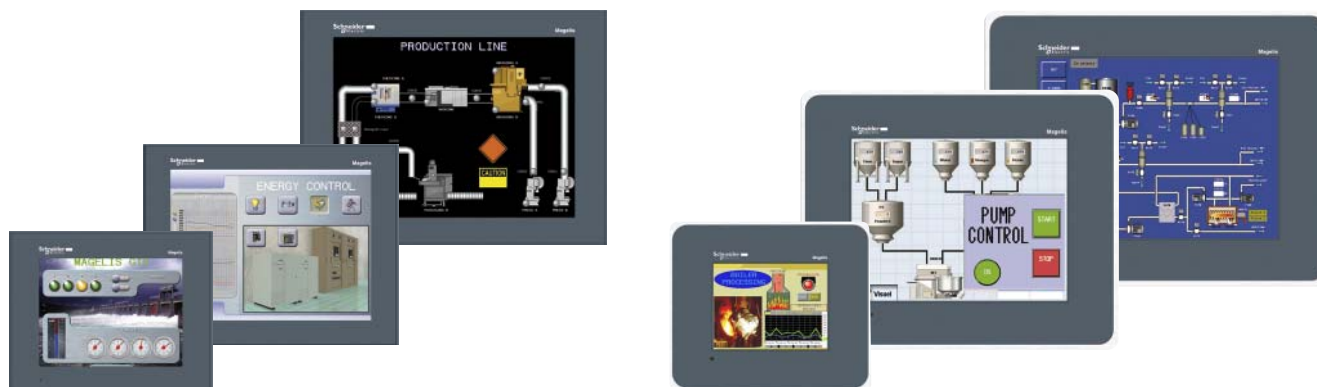

Colour TFT LCD, backlit 640 x 480 pixels (VGA)	Colour TFT LCD, backlit 640 x 480 pixels (VGA)	Colour TFT LCD, backlit 800 x 600 pixels (SVGA)	Colour TFT LCD, backlit 320 x 240 pixels (QVGA)	Colour TFT LCD, backlit 640 x 480 pixels (VGA)	Colour TFT LCD, backlit 800 x 600 pixels (SVGA)
7.5"	10.4"	12.1"	5.7"	10.4"	12.1"

Via touch screen

—
—
—
—
—

96 MB Flash EPROM

By 4 GB SD card

Limited by capacity of internal Flash EPROM memory or of SD card

Unlimited (8000 variables max.)

Alphanumeric, bitmap, bargraph, gauge, tank, tank level indicator, curves, polygon, button, LED

32 groups of 64 recipes comprising 1024 ingredients max.

Yes, with log

Yes

Built-in

—
—

Uni-TE (2), Modbus, Modbus TCP/IP (1) and for PLC brands: Mitsubishi, Omron, Allen-Bradley and Siemens

RS 232C (COM1) and RS 485 (COM2)

1 type A host connector + 1 mini-B connector

Ethernet TCP/IP (10BASE-T/100BASE-TX), Modbus Plus and Fipway via USB gateway

RS 232C (COM1) serial link and USB port for parallel printer

Vijeo Designer (on Windows XP and Windows 7)

Magelis (333 MHz RISC CPU)

HMI GTO4310	HMI GTO5310	HMI GTO6310	HMI GTO2315	HMI GTO5315	HMI GTO6315
--------------------	--------------------	--------------------	--------------------	--------------------	--------------------

1/43



More technical information on www.schneider-electric.com

Applications		Display of text messages, graphic objects and synoptic views Control and configuration of data		
Type of terminal		Touch screen Standard Advanced Panels		
				
Display	Type	Backlit monochrome (amber or red mode) STN LCD (320 x 240 pixels) or TFT LCD	Backlit monochrome or colour STN LCD or backlit colour TFT LCD (320 x 240 pixels) or (640 x 480 pixels) (3)	Backlit colour STN LCD or colour TFT LCD (640 x 480 pixels)
	Capacity	3.8" (monochrome or colour)	5.7" (monochrome or colour)	7.5" (colour)
Data entry		Via touch screen		
		–		
		–		
		–		
		–		
Memory capacity	Applications	32 MB Flash EPROM	16 MB Flash EPROM (3)	32 MB Flash EPROM
	Expansion	–	By means of 128 MB, 256 MB, 512 MB, 1 GB or 2 GB CF card (except XBT GT2110)	
Functions	Maximum number of pages	Limited by internal Flash EPROM memory capacity	Limited by capacity of internal Flash EPROM memory or CF card memory	
	Variables per page	Unlimited (8000 variables max.)		
	Representation of variables	Alphanumeric, bitmap, bargraph, gauge, tank, tank level indicator, curves, polygon, button, LED		
	Recipes	32 groups of 64 recipes comprising 1024 ingredients max.		
	Curves	Yes, with log		
	Alarm logs	Yes		
	Real-time clock	Built-in		
	Discrete I/O	–		1 input (reset) and 3 outputs (alarm, buzzer, run)
	Multimedia I/O	–	(3)	1 audio input (microphone), 1 composite video input (digital or analogue video camera), 1 audio output (loudspeaker) (1)
Communication	Downloadable protocols	Uni-TE (2), Modbus, Modbus TCP/IP (1) and for PLC brands: Mitsubishi, Omron, Allen-Bradley and Siemens		
	Asynchronous serial link	RS 232C/485 (COM1)	RS 232C/RS 422/485 (COM1) and RS 485 (COM2)	
	USB ports	1	1 (3)	1
	Bus and networks	–	Modbus Plus and Fipway with USB gateway, PROFIBUS DP and Device Net with optional card	
	Printer link	Ethernet TCP/IP (10BASE-T/100BASE-TX) (1) USB port for parallel printer RS 232C (COM1) serial link, USB port for parallel printer		
Development software		Vijeo Designer (on Windows XP Professional and Windows 7 Professional 32/64-bit)		
Operating system		Magelis (200 MHz RISC CPU)	Magelis (133 MHz RISC CPU) (3)	Magelis (266 MHz RIS CPU)
Type of terminal		XBT GT11/13	XBT GT21/22/23/24/29	XBT GT42/43
Page		1/59		

(1) Depending on model.

(2) Uni-TE version V2 for Twido controller and TSX Micro/Premium platform.

(3) For XBT GT 2430, 32 MB Flash EPROM, 1 sound output, 2 USB ports, 266 MHz RISC CPU.

(4) For XBT GT 5430.



Display of text messages, graphic objects and synoptic views
Control and configuration of data

Touch screen Standard Advanced Panels



Backlit colour STN LCD or colour TFT LCD
(640 x 480 pixels or 800 x 600 pixels) (4)

Backlit colour TFT LCD (800 x 600 pixels)

Backlit colour TFT LCD (1024 x 768 pixels)

10.4" (colour)

12.1" (colour)

15" (colour)

Via touch screen

—
—
—
—

32 MB Flash EPROM

By means of 128 MB, 256 MB, 512 MB, 1 GB or 2 GB CF card

Limited by capacity of internal Flash EPROM memory or CF card memory

Unlimited (8000 variables max.)

Alphanumeric, bitmap, bargraph, gauge, tank, tank level indicator, curves, polygon, button, LED

32 groups of 64 recipes comprising 1024 ingredients max.

Yes, with log

Yes

Built-in

1 input (reset) and 3 outputs (alarm, buzzer, run)

1 audio input (microphone), 1 composite video input (digital or analogue video camera), 1 audio output (loudspeaker) (1)

Uni-TE (2), Modbus, Modbus TCP/IP (1) and for PLC brands: Mitsubishi, Omron, Allen-Bradley and Siemens

RS 232C/RS 422/485 (COM1) and RS 485 (COM2)

2

Modbus Plus with USB gateway

Ethernet TCP/IP (10BASE-T/100BASE-TX)

RS 232C (COM1) serial link, USB port for parallel printer

Vijeo Designer (on Windows XP Professional and Windows 7 Professional 32/64-bit)

Magelis

(266 MHz RIS CPU)

XBT GT52/53/54

XBT GT63

XBT GT73

1/59



More technical information on www.schneider-electric.com

1

Applications		Display of text messages, graphic objects and synoptic views Control and configuration of data	
Type of terminal		Standard Advanced Panels with keypad	
			
Display	Type	Colour TFT LCD (320 x 240 pixels) or monochrome STN	Colour TFT LCD (640 x 480 pixels)
	Capacity	5.7" (monochrome or colour)	10.4" (colour)
Data entry		Via keypad and/or touch screen (configurable) and/or by industrial pointer	
	Static function keys	10	12
	Dynamic function keys	14	18
	Service keys	8	
	Alphanumeric keys	12	
Memory capacity	Application	16 MB Flash EPROM	32 MB Flash EPROM
	Expansion	By means of 128 MB, 256 MB, 512 MB, 1 GB or 2 GB CF card	
Functions	Maximum number of pages	Limited by capacity of internal Flash EPROM memory or CF card memory	
	Variables per page	Unlimited (8000 variables max.)	
	Representation of variables	Alphanumeric, bitmap, bargraph, gauge, tank, tank level indicator, curves, polygon, button, LED	
	Recipes	32 groups of 64 recipes comprising 1024 ingredients max.	
	Curves	Yes, with log	
	Alarm logs	Yes	
	Real-time clock	Built-in	
	Discrete I/O	—	1 input - 3 outputs
	Multimedia I/O	—	—
Communication	Downloadable protocols	Uni-TE (2), Modbus, Modbus TCP/IP (1) and for PLC brands: Mitsubishi, Omron, Allen-Bradley and Siemens	
	Asynchronous serial link	RS 232C/RS 422/485 (COM1) RS 485 (COM2)	
	USB ports	1	2
	Bus and networks	Modbus Plus, Fipway with USB gateway, PROFIBUS DP and Device Net with optional card Ethernet TCP/IP (10BASE-T/100BASE-TX)	
	Printer link	RS 232C (COM1) serial link, USB port for parallel printer	
Development software		Vijeo Designer (on Windows XP Professional and Windows 7 Professional 32/64-bit)	
Operating system		Magelis (CPU 266 MHz RISC)	
Type of terminal		XBT GK 21/23	XBT GK 53
Page		1/60	

(1) Depending on model.

(2) Uni-TE version V2 for Twido controller and TSX Micro/Premium platform.



Display of text messages, graphic objects and synoptic views
Control and configuration of data

Portable Standard Advanced Panels **Open touch screen Standard Advanced Panels**

							
Colour TFT LCD (640 x 480 pixels)		Colour TFT LCD (800 x 600 pixels)		Colour TFT LCD (800 x 600 pixels)		Colour TFT LCD (1024 x 768 pixels)	
5.7" (colour)		10.4" (colour)		12" (colour)		15" (colour)	
Via touch screen		Via touch screen					
11		—					
—		—					
—		—					
—		—					
32 MB Flash EPROM		2 GB CF system card included with terminal, expandable to 4 GB					
By means of 128 MB, 256 MB, 512 MB, 1 GB or 2 GB CF card (3)							
Limited by capacity of internal Flash EPROM memory or CF card memory							
Unlimited (8000 variables max.)							
Alphanumeric, bitmap, bargraph, gauge, tank, tank level indicator, curves, polygon, button, LED							
32 groups of 64 recipes comprising 1024 ingredients max.							
Yes, with log							
Yes							
Built-in							
—							
1 audio output							
Uni-TE (2), Modbus, Modbus TCP/IP and for PLC brands: Mitsubishi, Omron, Rockwell Automation and Siemens		Uni-TE (2), Modbus, Modbus TCP/IP (1) and for PLC brands: Mitsubishi, Omron, Allen-Bradley and Siemens					
RS 232C/RS 422-485 (COM1)		RS 232C (COM1)		RS 232C (COM1)		RS 232C (COM1)	
1		2+1 frontal		4+1 frontal		2+1 frontal	
—		Modbus Plus with USB gateway					
1 Ethernet port (10BASE-T/100BASE-TX)		2 Ethernet ports (4) (10BASE-T/100BASE-TX/1 GB)					
—		RS 232C (COM1) serial link, USB port for parallel printer					
Vijeo Designer (on Windows XP Professional and Windows 7 Professional 32/64-bit)							
Magelis (266 MHz RISC CPU)		Windows XP Embedded					
XBT GH 2460/ XBT GH 2460B (5)		XBT GTW 5354		XBT GTW 652		HMI GTW 7354 HMI GTW 73545 (6)	
1/60		1/61					

(1) Depending on model.

(2) Uni-TE version V2 for Twido controller and TSX Micro/Premium platform.

(3) Except for HMI GTW●●●● with 4 GB SD memory card.

(4) Except on XBT GTW652 with 1 Ethernet TCP/IP port (10BASE-T/100BASE-TX) and 1 Ethernet TCP/IP port (10BASE-T/100BASE-TX/1 GB).

(5) Version without Emergency stop button.

(6) Version with stainless steel front panel.




More technical information on www.schneider-electric.com

1



Magelis colour touch screen terminals HMI GTO●●●0 in 5 sizes from 3.5" to 12.1" (standard version)

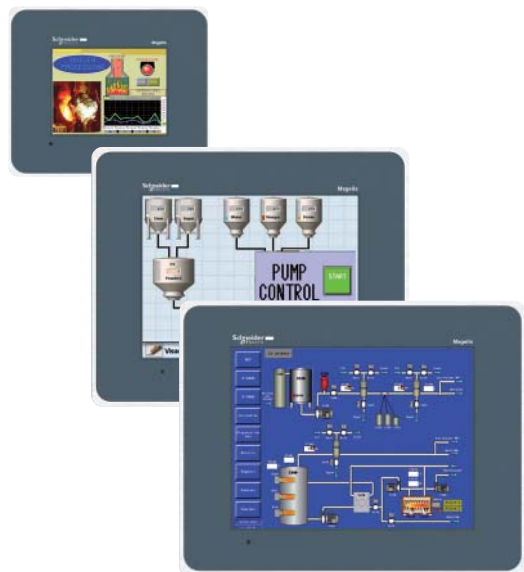

Magelis colour touch screen terminals HMI GTO●●●5 in 3 sizes from 5.7" to 12.1" ("Stainless Steel" version)

Overview

The Optimum Advanced Panels (Magelis GTO) touch screen panels offer includes:

- A range of 8 colour touch screen terminals (TFT technology), available in a choice of 5 sizes
 - 3.5"
 - 5.7"
 - 7": 7 Wide and 7.5" (front identical in size)
 - 10.4"
 - 12.1"
 - A range of 3 colour TFT touch screens available in 3 sizes:
 - 5.7"
 - 10.4"
 - 12.1"
- with front featuring a stainless steel frame, dedicated to applications in harsh environments (food & beverage and pharmaceutical).

Operation

Magelis GTO Advanced Panels feature optimized information and communication technologies, which, depending on the model, include:

- High level of communication (embedded Ethernet, multilink, Web server and FTP, e-mail)
- External storage of data (SD memory card and USB memory stick) for storing production data and backing up applications
- Management of peripherals: printers, bar code readers, etc.

These terminals offer an excellent level of technical performance designed principally for use by OEM customers.

Environment

The Magelis GTO optimized range has been designed in accordance with numerous standards, certifications and requirements:

- Standards: EN 61131-2, 61000-6-2 and UL508.
- Certifications:
 - CE, C-tick, GOST-R, KCC
 - Atex and UL Hazardous location (pending)
 - Marine certifications (pending).
- Operating temperature: up to 55°C
- Degree of protection (according to IEC 60529):
 - IP 65 for standard version products
 - IP 67 for standard version products fitted with a cover for harsh environments (see accessories page 1/62)
 - IP 66K for "Stainless Steel" version products
- Resistance to high-pressure cleaning (conforming to DIN 40050-9): up to 10 bar for "Stainless Steel" version products.



Display of a video sequence

Configuration


Like all the other Magelis Advanced Panels, Magelis GTO Optimum Advanced Panels can be configured using Vijeo Designer software in a Windows XP and Windows 7 environment.

Vijeo Designer software boasts an advanced user interface with many configurable windows, enabling projects to be developed quickly and easily.

The Magelis GTO range is compatible with Vijeo Designer version V6.1 or later.

See page 4/8.

Communication

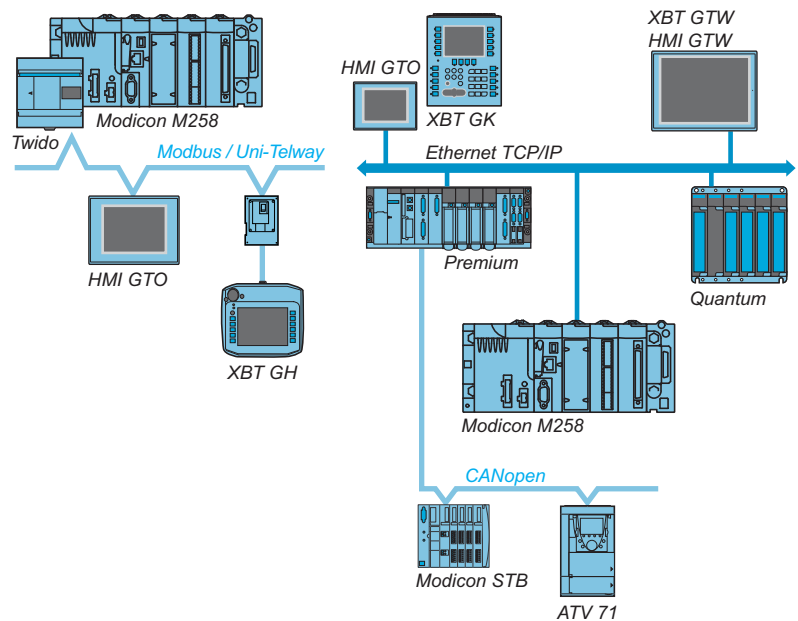

Optimum Advanced Panels communicate with PLCs via one or two integrated serial links, using communication protocols:

- Schneider Electric (Uni-TE, Modbus)
- Third-party: Mitsubishi Electric, Omron, Allen-Bradley and Siemens

Depending on the model, they can be connected to Ethernet TCP/IP networks using:

- A Modbus TCP protocol
- An Ethernet TCP/IP protocol
- or a third party protocol

Functions

Optimum Advanced Panels offer the following functions:

- Display of animated synoptic views with 8 types of animation (pressing the touch panel, colour changes, filling, movement, rotation, size, visibility and value display)
- Control, modification of numeric and alphanumeric values
- Display of current date and time
- Real-time and trending curves with log
- Alarm display, alarm log and management of alarm groups
- Multiwindow management
- Operator-initiated page calls
- Multilingual application management (10 languages at the same time)
- Recipe management
- Data processing via Java script
- Storage of the application and logs on external application memory card in SD format or USB stick
- Management of serial printers, barcode readers

MachineStruxure™



SoMachine software platform



Vijeo Designer configuration software

Architectures and communication

The Magelis GTO Optimum range is perfectly integrated in the MachineStruxure™ (1) automation solutions offer, which helps machine manufacturers (OEMs) to quickly design optimized machines (in terms of cost and energy efficiency).

MachineStruxure™ solutions are based on high performance control platforms and a single software package: SoMachine. SoMachine allows the development, commissioning and programming of machines. SoMachine version 3.1 allows programming of terminals in the Magelis GTO range using Vijeo Designer software.

Optimum Advanced Panels have been designed for PlantStruxure™ (2) and MachineStruxure™ (1) architectures as well as for Transparent Ready equipment (combination of Web and Ethernet TCP/IP technologies). Therefore, all panels with an Ethernet port feature a built-in FTP server for data file transfer and a Web Gate function for remote access to the application of the panel from a PC with an Internet browser.

Vijeo Designer also allows Magelis Advanced Panels to browse HTML pages and send e-mails.

PlantStruxure™


(1) For more information on the "MachineStruxure™" concept, please consult our catalogue "Automation solutions for industrial machines".

(2) For more information on the "PlantStruxure™" concept, please consult our website www.schneider-electric.com/Solutions/Process and Machines Management.


Panel operating modes

The following illustrations show the equipment that can be connected to Optimum Advanced Panels according to their two operating modes.

Edit mode

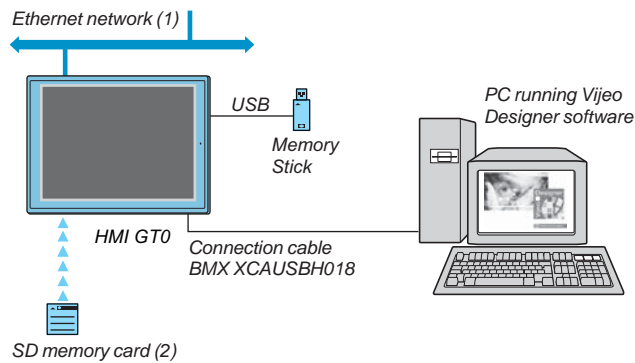


Operating mode

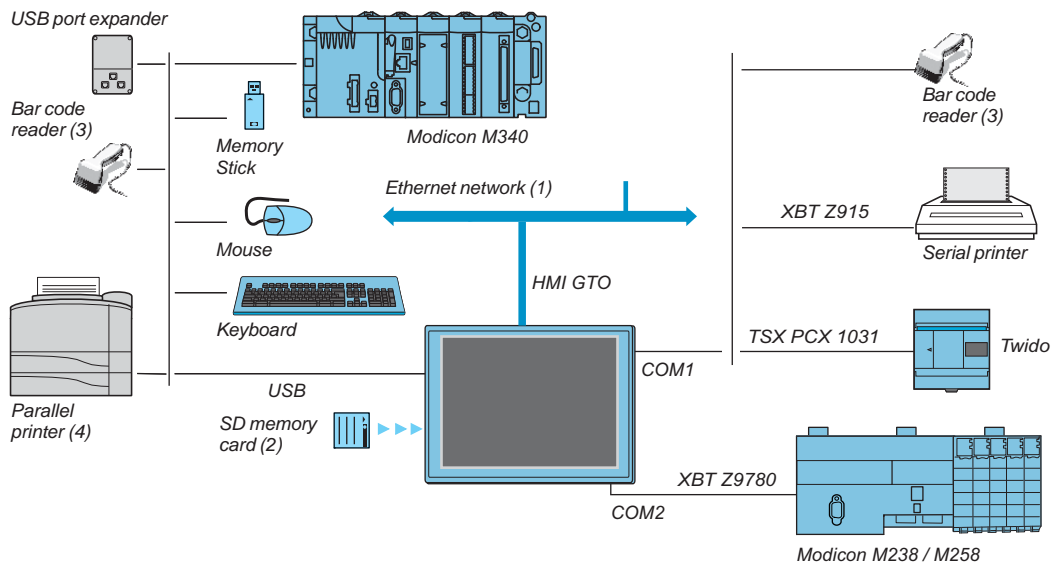

- (1) With **HMI GTO●●1●●**.
- (2) Memory card, except HMI GTO1300/1310/2300.
- (3) Validated with DataLogic Gryphon bar code reader.
- (4) Validated with Hewlett Packard printer via USB/PIO converter.

1

Common front




Description

Magelis HMI GTO1300 / 1310 Advanced Panels

HMI GTO1300 and HMI GTO1310 panels have the following features on the front:

- 1 A touch screen for displaying synoptic views (3.5" colour TFT)
- 2 A multicolour indicator (green, orange and red) showing the panel's operating mode
- 3 Six function keys (F1, F2, F3, F4, F5 and F6)

Rear HMI GTO1300

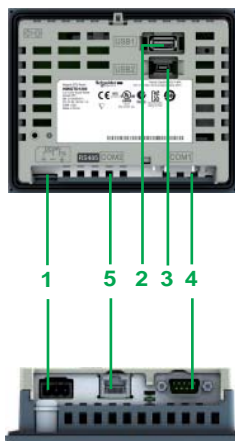


Underside HMI GTO1300

The HMI GTO1300 panel has the following features on the rear and underside:

- 1 A removable screw terminal block for 24 V power supply
- 2 A type A USB host connector for connecting peripherals, transferring applications and Modicon M340 terminal port communication
- 3 A mini-B USB connector for application transfer
- 4 A 9-way male SUB-D connector for RS 232C serial link to PLCs (COM1)
- 5 An RJ45 connector for RS 485 serial link to PLCs (COM2)

Rear HMI GTO1310

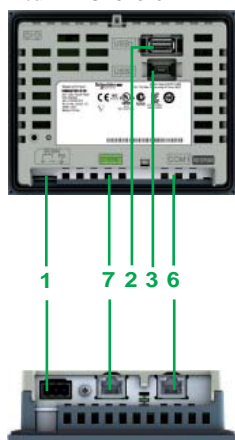

Underside HMI GTO1310

The HMI GTO1310 panel has the following features on the rear and underside:



- 1 A removable screw terminal block for 24 V power supply
- 2 A type A USB host connector for connecting peripherals, transferring applications and Modicon M340 terminal port communication
- 3 A mini-B USB connector for application transfer
- 6 An RJ45 connector for RS 232C or RS 485 serial link to PLCs (COM1)
- 7 An RJ45 connector for Ethernet TCP/IP link, 10BASE-T/100BASE-TX

Operator dialogue terminals


Magelis™ GTO Optimum Advanced Panels

Panels with 5.7" touch screen, standard and Stainless Steel version

Front

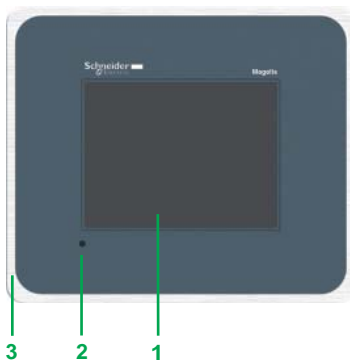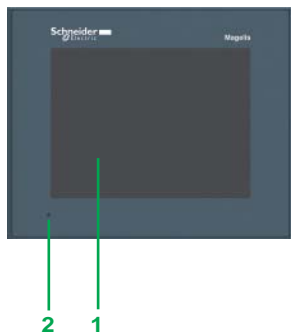

Rear HMI GTO2315

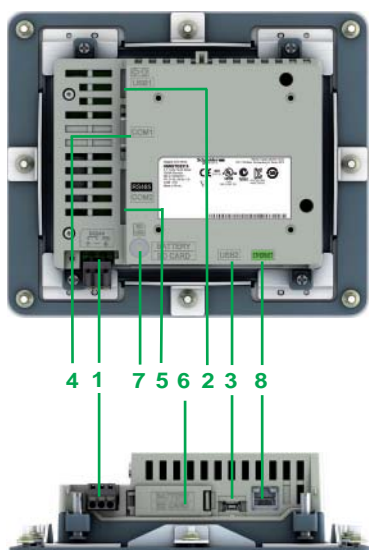

Underside HMI GTO2315

Description

Magelis Advanced Panels HMI GTO2300 / 2310 (standard version) and HMI GTO2315 (Stainless Steel version)

HMI GTO2300 and HMI GTO2310 panels have the following features on the front:

- 1 A touch screen for displaying synoptic views (5.7" colour TFT)
- 2 A multicolour indicator (green, orange and red) showing the panel's operating mode

The HMI GTO2315 panel has the following features on the front:

- 1 A touch screen for displaying synoptic views (5.7" colour TFT)
- 2 A multicolour indicator (green, orange and red) showing the panel's operating mode
- 3 A stainless steel frame, for food & beverage environments. Only this product provides IP 66K degree of protection.

All 3 of these panels have the following features on the rear and underside:



- 1 A removable screw terminal block for 24 V $\overline{\text{DC}}$ power supply
- 2 A type A USB host connector for connecting peripherals, transferring applications and Modicon M340 terminal port communication
- 3 A mini-B USB connector for application transfer
- 4 A 9-way male SUB-D connector for RS 232C serial link to PLCs (COM1)
- 5 An RJ45 connector for RS 485 serial link (COM2)

On HMI GTO2310 and HMI GTO2315 only:


- 6 A slot for SD memory card, with hinged cover
- 7 LED indicating presence of the SD memory card
- 8 An RJ45 connector for Ethernet TCP/IP link, 10BASE-T/100BASE-TX

1

Front

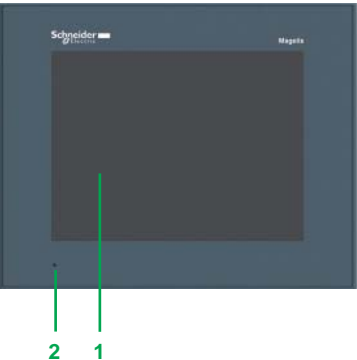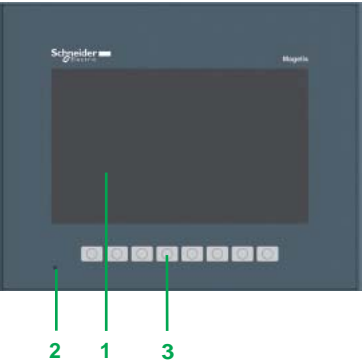

Rear

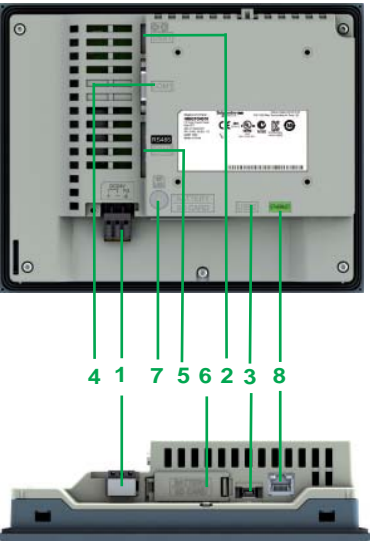

Underside

Description

Magelis Advanced Panels HMI GTO3510 / 4310

The HMI GTO3510 panel has the following features on the front:

- 1 A touch screen for displaying synoptic views (7.0" Wide colour TFT)
- 2 A multicolour indicator (green, orange and red) showing the panel's operating mode
- 3 Eight function keys (F1, F2, F3, F4, F5, F6, F7 and F8)

The HMI GTO4310 panel has the following features on the front:

- 1 A touch screen for displaying synoptic views (7.5" colour TFT)
- 2 A multicolour indicator (green, orange and red) showing the panel's operating mode

Both terminals have the following features on the rear and underside:



- 1 A removable screw terminal block for 24 V $\overline{\text{---}}$ power supply
- 2 A type A USB host connector for connecting peripherals, transferring applications and Modicon M340 terminal port communication
- 3 A mini-B USB connector for application transfer
- 4 A 9-way male SUB-D connector for RS 232C serial link to PLCs (COM1)
- 5 An RJ45 connector for RS 485 serial link (COM2)
- 6 A slot for SD memory card, with hinged cover
- 7 LED indicating presence of the SD memory card
- 8 An RJ45 connector for Ethernet TCP/IP link, 10BASE-T/100BASE-TX with an activity LED

Operator dialogue terminals


Magelis™ GTO Optimum Advanced Panels

Panels with 10.4" touch screen, standard and Stainless Steel version

Front

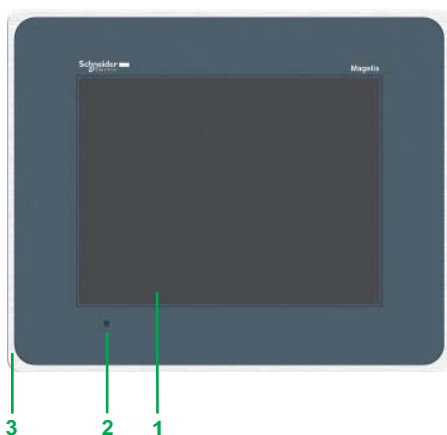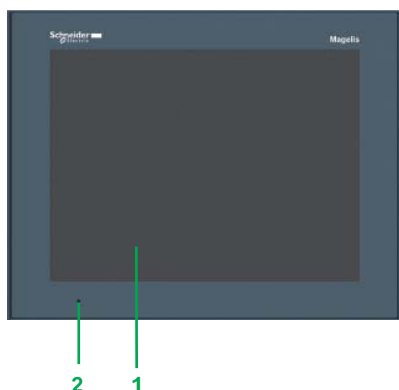

Rear

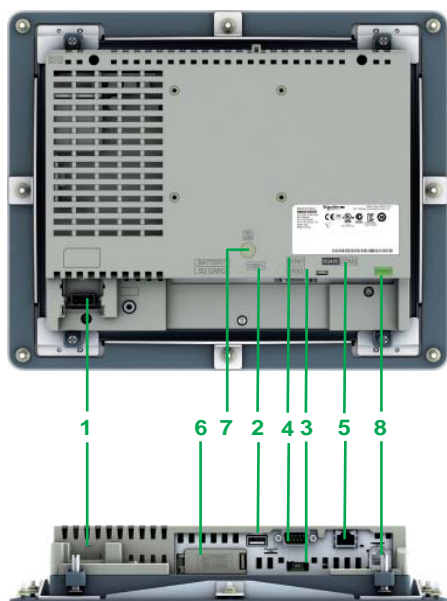

Underside

Description

Magelis Advanced Panels HMI GTO5310 (standard version) and HMI GTO5315 (Stainless Steel version)

The HMI GTO5310 panel has the following features on the front:

- 1 A touch screen for displaying synoptic views (10.4" colour TFT)
- 2 A multicolour indicator (green, orange and red) showing the panel's operating mode

The HMI GTO5315 panel has the following features on the front:

- 1 A touch screen for displaying synoptic views (10.4" colour TFT)
- 2 A multicolour indicator (green, orange and red) showing the panel's operating mode
- 3 A stainless steel frame, for food & beverage environments. Only this product provides IP 66K degree of protection.

Both terminals have the following features on the rear and underside:


- 1 A removable screw terminal block for the 24 V \square power supply
- 2 A type A USB host connector for connecting peripherals, transferring applications and Modicon M340 terminal port communication
- 3 A mini-B USB connector for application transfer
- 4 A 9-way male SUB-D connector for RS 232C serial link to PLCs (COM1)
- 5 An RJ45 connector for RS 485 serial link (COM2)
- 6 A slot for SD memory card, with hinged cover
- 7 LED indicating presence of the SD memory card
- 8 An RJ45 connector for Ethernet TCP/IP link, 10BASE-T/100BASE-TX with an activity LED

Operator dialogue terminals

Magelis™ GTO Optimum Advanced Panels

Panels with 12.1" touch screen, standard and Stainless Steel version

Front

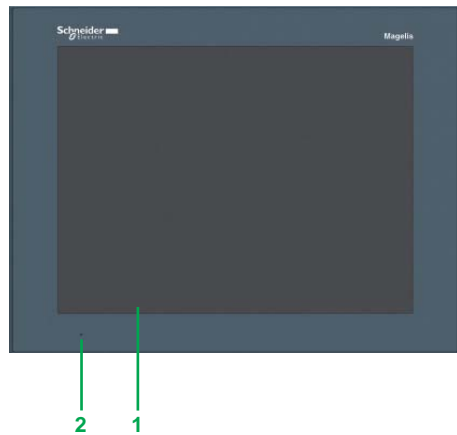


Description

Magelis Advanced Panels HMI GTO6310 (standard version) and HMI GTO6315 (Stainless Steel version)

The HMI GTO6310 panel has the following features on the front:


- 1 A touch screen for displaying synoptic views (12.1" colour TFT)
- 2 A multicolour indicator (green, orange and red) showing the panel's operating mode

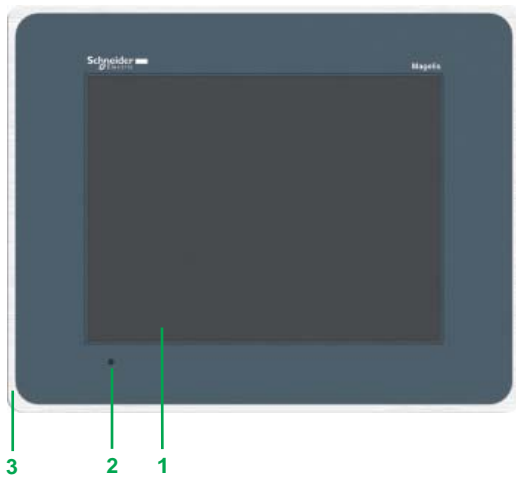

The HMI GTO6315 panel has the following features on the front:

- 1 A touch screen for displaying synoptic views (12.1" colour TFT)
- 2 A multicolour indicator (green, orange and red) showing the panel's operating mode
- 3 A stainless steel frame, for food & beverage environments. Only this product provides IP 66K degree of protection.

Rear

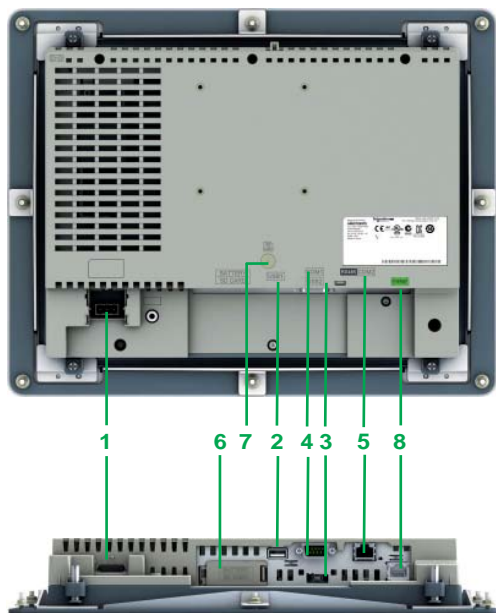

Both terminals have the following features on the rear and underside:

- 1 A removable screw terminal block for the 24 V $\overline{\text{---}}$ power supply
- 2 A type A USB host connector for connecting peripherals, transferring applications and Modicon M340 terminal port communication
- 3 A mini-B USB connector for application transfer
- 4 A 9-way male SUB-D connector for RS 232C serial link to PLCs (COM1)
- 5 An RJ45 connector for RS 485 serial link (COM2)
- 6 A slot for SD memory card, with hinged cover
- 7 LED indicating presence of the SD memory card
- 8 An RJ45 connector for Ethernet TCP/IP link, 10BASE-T/100BASE-TX with an activity LED

Underside

Operator dialogue terminals

Magelis™ GTO Optimum Advanced Panels

Panels with 3.5" to 12.1" touch screen



Optimum 24 V DC panels with colour touch screen, standard version ⁽¹⁾

Data entry method	Number of ports	Application memory capacity	Memory expansion by SD card	Serial link	Embedded Ethernet	Reference	Weight kg
3.5" QVGA TFT LCD screen, 320 x 240 pixels							
Via touch screen + 6 function keys	2 USB	64 MB	No	1 COM 1 1 COM 2	–	HMI GTO1300	0.400
	2 USB	96 MB	No	1 COM 1	1	HMI GTO1310	0.400

5.7" QVGA TFT LCD screen, 320 x 240 pixels

Via touch screen	2 USB	64 MB	No	1 COM 1 1 COM 2	–	HMI GTO2300	0.800
	2 USB	96 MB	Yes (2)	1 COM 1 1 COM 2	1	HMI GTO2310	0.800

7.0" WVGA (Wide) TFT LCD screen, 800 x 480 pixels

Via touch screen + 8 function keys	2 USB	96 MB	Yes (2)	1 COM 1 1 COM 2	1	HMI GTO3510	1.200
------------------------------------	-------	-------	---------	--------------------	---	-------------	-------

7.5" VGA TFT LCD screen, 640 x 480 pixels

Via touch screen	2 USB	96 MB	Yes (2)	1 COM 1 1 COM 2	1	HMI GTO4310	1.200
------------------	-------	-------	---------	--------------------	---	-------------	-------

10.4" VGA TFT LCD screen, 640 x 480 pixels

Via touch screen	2 USB	96 MB	Yes (2)	1 COM 1 1 COM 2	1	HMI GTO5310	2.000
------------------	-------	-------	---------	--------------------	---	-------------	-------

12.1" SVGA TFT LCD screen, 800 x 600 pixels

Via touch screen	2 USB	96 MB	Yes (2)	1 COM 1 1 COM 2	1	HMI GTO6310	2.500
------------------	-------	-------	---------	--------------------	---	-------------	-------

Optimum 24 V DC terminals with colour touch screen, Stainless Steel version ⁽¹⁾ ⁽³⁾

Data entry method	Number of ports	Application memory capacity	Compact Flash memory	Composite video input	Embedded Ethernet	Reference	Weight kg
5.7" QVGA screen, 320 x 240 pixels, with stainless steel frame (IP 66K)							
Via touch screen	2 USB	96 MB	Yes (2)	1 COM 1 1 COM 2	1	HMI GTO2315	1.200

10.4" VGA screen, 640 x 480 pixels, with stainless steel frame (IP 66K)

Via touch screen	2 USB	96 MB	Yes (2)	1 COM 1 1 COM 2	1	HMI GTO5315	2.500
------------------	-------	-------	---------	--------------------	---	-------------	-------

12.1" SVGA screen, 800 x 600 pixels, with stainless steel frame (IP 66K)

Via touch screen	2 USB	96 MB	Yes (2)	1 COM 1 1 COM 2	1	HMI GTO6315	3.000
------------------	-------	-------	---------	--------------------	---	-------------	-------

(1) Terminals supplied with fixing kit (screw clips), locking device for USB connectors and instruction sheet. Setup documentation for Magelis GTO terminals is included in electronic format with Vijeo Designer configuration software (see page 4/13).

(2) Memory expansion possible with 4 GB SD card **HMI ZSD4G**, see accessories page 1/62.

(3) The Stainless Steel version includes a front with stainless steel frame. Only this version provides IP 66K degree of protection.

Presentation



Touch screen terminals with monochrome or colour screen in 6 sizes from 3.8" to 15"

The Magelis Standard Advanced Panels touch screen terminals offer consists of:

- A range of 20 touch screen terminals (XBT GT) available with a wide choice of screen sizes (3.8", 5.7", 7.5", 10.4" 12.1" and 15") in various versions (monochrome, colour, STN or TFT)
- An XBT GT 5.7" terminal (XBT GT 2930) equipped with a screen featuring an anti-reflection coating and a backlit display that is twice as intense for applications in brightly-lit environments, in particular those which are exposed to sunlight
- A range of 3 keypad/touch screen terminals (XBT GK), sizes 5.7" and 10.4" (monochrome, colour)
- A range of touch screen/open terminals (GTW), sizes 10.4", 12" and 15", with Windows XP Embedded operating system for open access to new automation functions
- A portable touch screen terminal (XBT GH) with 5.7" colour screen and safety devices (Emergency stop, enabling grip switch, etc.)

Operation

These terminals are available in one of two function levels:

- Optimum level (without memory expansion and without fieldbus connection): XBT GT 3.8" and XBT GT 5.7" (Blue mode)
- Multifunction level for the rest of the range: XBT GT/GK/GH/GTW (5.7", 7.5", 10.4", 12.1" and 15")

Multifunction Magelis Standard Advanced Panels terminals feature new information and communication technologies which, depending on the model, include:

- High level of communication (embedded Ethernet, multilink, Web server and FTP)
- External storage of data (Compact Flash memory card and USB memory stick) for storing production data and backing up applications
- Multimedia data with integrated image and sound management (digital or analogue camera)
- Management of peripherals: Printers, bar code readers, loudspeakers, etc.




Display of a video sequence

Configuration

Magelis Standard Advanced Panels can be configured using Vijeo Designer software in a Windows XP Professional and Windows 7 Professional 32/64-bit environment.

Vijeo Designer software boasts an advanced user interface with many configurable windows, enabling projects to be developed quickly and easily. This version can process composite video signals from a camera or camcorder. See page 4/8.

Communication

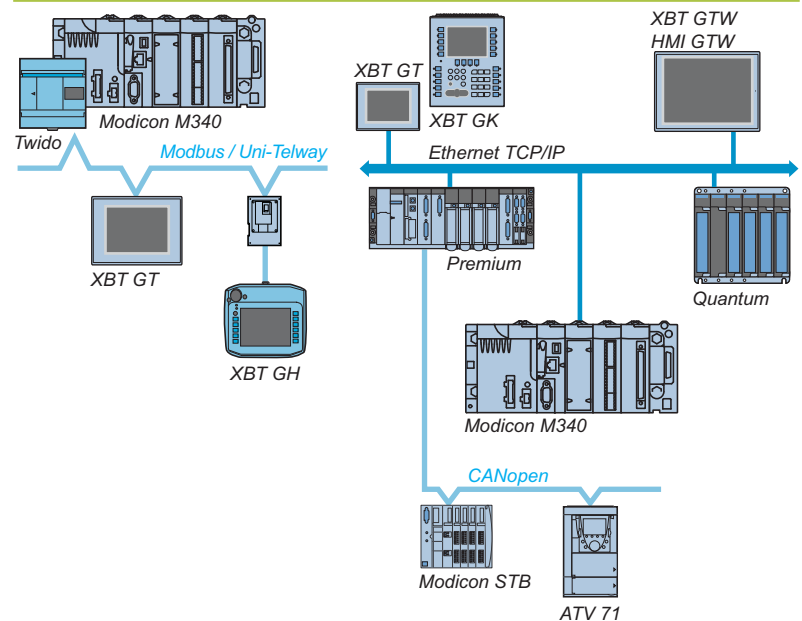

Magelis Standard Advanced Panels communicate with PLCs via one or two integrated serial links, using communication protocols:

- Schneider Electric (Uni-TE, Modbus)
- Third-party: Mitsubishi Electric, Omron, Allen-Bradley and Siemens

Magelis multifunction terminals can be connected, depending on the model, to Ethernet TCP/IP networks using Modbus TCP or third party protocols, and to fieldbuses (FIPWAY, Modbus Plus, Device Net, PROFIBUS DP).

Functions

Magelis Standard Advanced Panels offer the following functions:

- Display of animated mimics with 8 types of animation (pressing the touch panel, colour changes, filling, movement, rotation, size, visibility and value display)
- Control and modification of numeric or alphanumeric variables
- Display of current date and time
- Real-time and trending curves with log
- Alarm display, alarm log and management of alarm groups
- Multiwindow management
- Page calls initiated by the operator
- Multilingual application management (10 languages at the same time)
- Recipe management
- Data processing via Java script
- Storage of the application and logs on external Compact Flash application memory card (multifunction range) or USB key
- Serial printer and bar code reader management (multifunction range)
- Sound messages management (multifunction range)
- Composite video signal management from camera or camcorder on XBT GT and digital video signal (Webcam) management on Magelis GTW

Magelis Standard Advanced Panels have been designed for Transparent Ready architectures and equipment (combination of Web and Ethernet TCP/IP technologies). Therefore, all terminals with an Ethernet port feature a built-in FTP server for data file transfer and a Web Gate function for remote access to the application of the terminal from a PC with an Internet browser.

The latest version of Vijeo Designer thus allows Magelis Standard Advanced Panels to browse HTML pages and send e-mails.


The flexibility of Windows XP Embedded on touch screen/open Standard Advanced Panels Magelis GTW terminals simultaneously allows:

- The running of a Vijeo Designer application
- The use of Internet Explorer or Office Readers
(.pdf, .doc, .xls, and .ppt documents)


Panel operating modes

The following illustrations show the equipment that can be connected to Magelis Standard Advanced Panels according to their two operating modes.

Edit mode

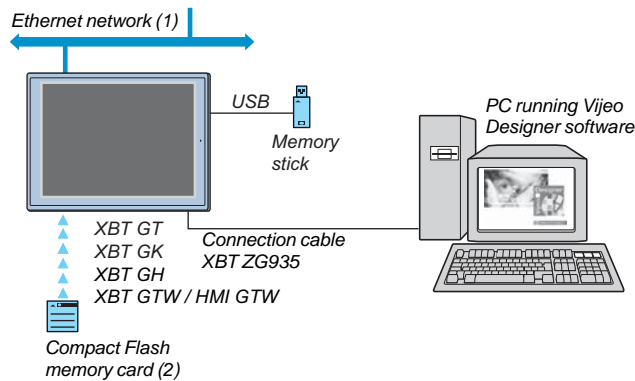

Operating mode

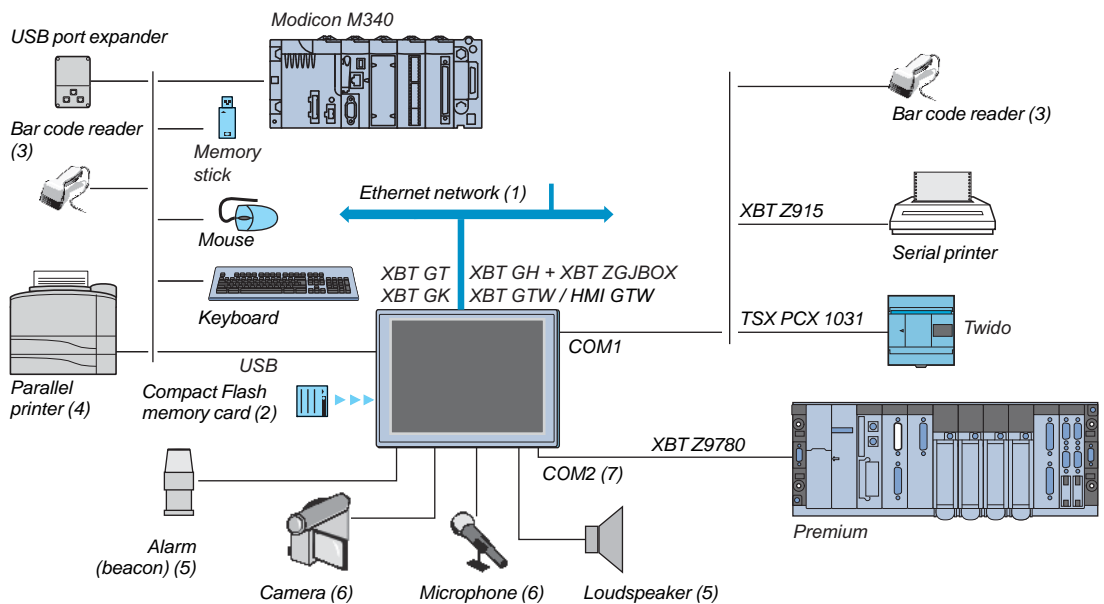

- (1) With XBT GT●●30/XBT GT●●40/XBT GK●●30/XBT GTW●●●/HMI GTW●●● and XBT GH246●●.
- (2) Memory card, except XBT GT11/13/2110.
- (3) Validated with DataLogic Gryphon bar code reader.
- (4) Validated with Hewlett Packard printer via USB/PIO converter.
- (5) With XBT GT/GK/GTW 7.5" screen min. and HMI GTW.
- (6) With multimedia XBT GT 7.5" to 15": XBT GT●340.
- (7) With XBT GT and XBT GK 5.7" screen min.

Improve environmental resistance with Conformal Coating

The Conformal Coating service offer consists of varnishing the electronic cards to prolong the service life of the terminals and enable them to be used in corrosive environments. The varnishing increases resistance to condensation, dusty atmospheres and chemical corrosion (sulphurous and halogenous atmospheres).

For further information on this service offer, please consult our Customer Care Centre.


Description

Standard Advanced Panels Magelis Optimum XBT GT1105/1135/1335

Front panel

The front panels of Standard Advanced Panels Magelis Optimum XBT GT1105/1135/1335 comprise:


- 1 A touch screen for displaying synoptic views (3.8" amber or red mode monochrome, colour TFT)
- 2 A control LED indicating the operating mode of the terminal



Rear panel

The rear panels of Standard Advanced Panels Magelis Optimum XBT GT1105/1135/1335 comprise:

- 1 A removable screw terminal block for 24 V $\overline{\text{---}}$ power supply
- 2 An RJ45 connector for RS 232C or RS 485 serial link connection to PLCs (COM1)
- 3 A USB type A host connector for peripheral connection, application transfer and Modicon M340 terminal port communication
- 4 A switch for polarization of the serial link, used on RS 485 Modbus



On XBT GT1135/1335 only


- 5 An RJ45 connector for Ethernet TCP/IP link, 10/100BASE-T

Description

Standard Advanced Panels Magelis Optimum XBT GT2110 and Multifunction XBT GT2●20 & XBT GT2●30


The front panel comprises:

- 1 A touch screen for displaying synoptic views (5.7" monochrome or colour)
- 2 A multicolour indicator (green, orange and red) showing the terminal's operating mode

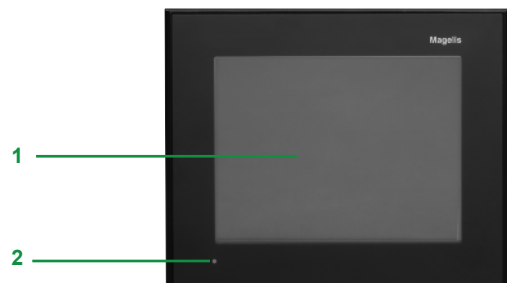

The rear panel comprises:

- 1 A removable screw terminal block for 24 V \square power supply
- 2 A USB type A host connector for connecting peripherals, transferring applications and Modicon M340 terminal port communication
- 3 A 9-way male SUB-D connector for RS 232C or RS 422/485 serial link to PLCs (COM1)
- 4 An expansion unit interface for fieldbus communication card (Device Net, PROFIBUS DP) (1)
- 5 A switch for polarization of the COM2 serial link, used on Modbus
- 6 An RJ45 connector for RS 485 serial link (COM2)
- 7 A Compact Flash memory card slot, with cover (except XBT GT2110 Optimum model)

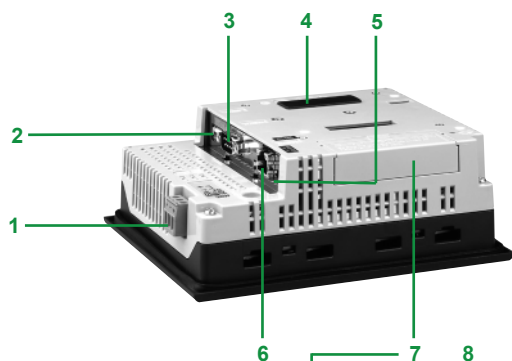


On XBT GT2130, GT2330 and GT 2930 only:

- 8 An RJ45 connector for Ethernet TCP/IP link, 10BASE-T/100BASE-TX

On XBT GT2430 only:

- 8 An RJ45 connector for Ethernet TCP/IP link, 10BASE-T/100BASE-TX
- 9 A mini-jack connector for audio output

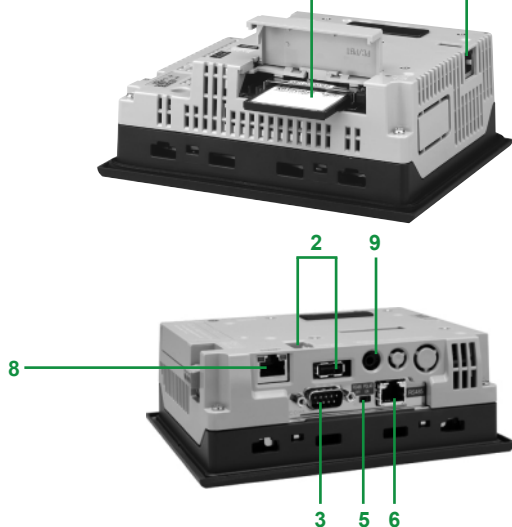


(1) See page 1/70 for details of the required connection accessories.

1


Description

Standard Advanced Panels Magelis Multifunction XBT GT4230 & 4300

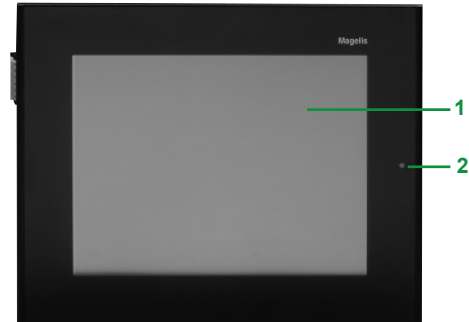

The front panel comprises:

- 1 A touch screen for displaying synoptic views (7.5" colour STN or 7.5" colour TFT, depending on model)
- 2 A multicolour indicator (green, orange and red) showing the terminal's operating mode

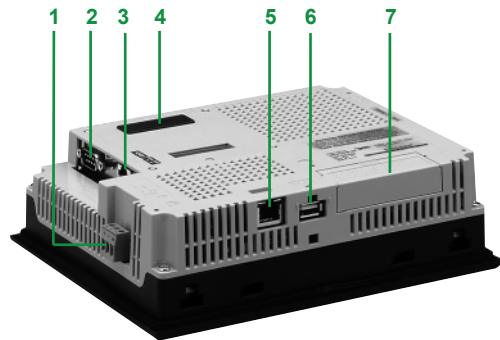

The rear panel comprises:

- 1 A removable screw terminal block for 24 V \square power supply
- 2 A 9-way male SUB-D connector for RS 232C or RS 422/485 serial link to PLCs (COM1)
- 3 An RJ45 connector for RS 485 (COM2) with switch for polarization of the link used on Modbus
- 4 An expansion unit interface for fieldbus communication card (Device Net, PROFIBUS DP) (1)
- 5 An RJ45 connector for Ethernet TCP/IP link, 10BASE-T/100BASE-TX, with an activity LED
- 6 A USB type A host connector for connecting peripherals, transferring applications and Modicon M340 terminal port communication
- 7 A slot for Compact Flash memory card, with hinged cover
- 8 A removable I/O connector, 12 spring terminals for loudspeaker connection, one input (reset) and 3 outputs (alarm, buzzer, run)




On XBT GT4340 only:

- 9 A mini-jack connector for connecting a microphone
- 10 An RCA connector for connecting a digital or analogue video camera (NTSC/PAL)

(1) See page 1/70 for details of the required connection accessories.


Description

Standard Advanced Panels Magelis Multifunction XBT GT5230, XBT GT53●0 and XBT GT5430

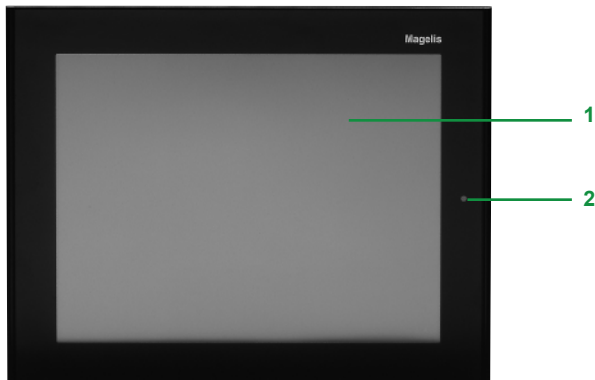

The front panel comprises:

- 1 A touch screen for displaying synoptic views (10.4" colour STN or 10.4" colour TFT, depending on model)
- 2 A multicolour indicator (green, orange and red) showing the terminal's operating mode

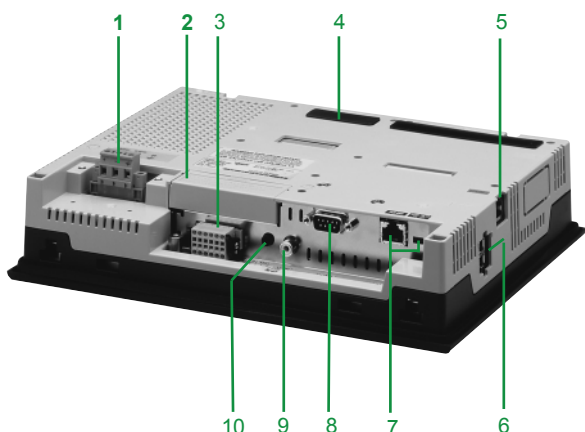

The rear panel comprises:

- 1 A removable screw terminal block for 24 V $\overline{\text{---}}$ power supply
- 2 A slot for Compact Flash memory card, with hinged cover
- 3 A removable I/O connector (1), 12 spring terminals for loudspeaker connection, one input (reset) and 3 outputs (alarm, buzzer, run)
- 4 An expansion unit interface for fieldbus communication card (Device Net, PROFIBUS DP) (2)
- 5 An RJ45 connector for Ethernet TCP/IP link, 10BASE-T/100BASE-TX, with an activity LED
- 6 Two USB type A host connectors for connecting peripherals, transferring applications and Modicon M340 terminal port communication
- 7 An RJ45 connector for RS 485 (COM2) with switch for polarization of the link used on Modbus
- 8 A 9-way male SUB-D connector for RS 232C or RS 422/485 serial link to PLCs (COM1)

On XBT GT5340 only:

- 9 A mini-jack connector for connecting a microphone
- 10 An RCA connector for connecting a digital or analogue video camera (NTSC/PAL)


(1) On model XBT GT5230, this removable terminal block is located on the rear panel of the terminal.

(2) See page 1/70 for details of the required connection accessories.

1


Description

Standard Advanced Panels Magelis Multifunction XBT GT6300 & XBT GT7340

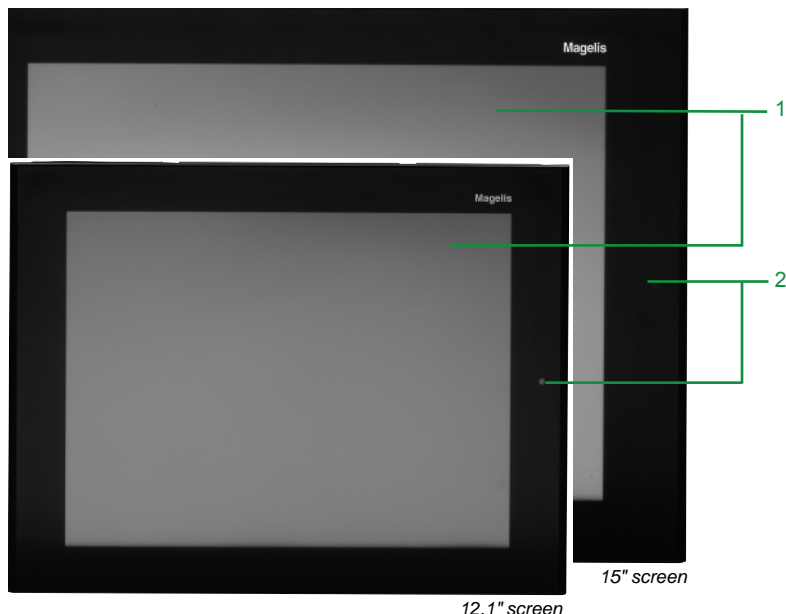

The front panel comprises:

- 1 A touch screen for displaying synoptic views (12.1" or 15" colour TFT, depending on model)
- 2 A multicolour indicator (green, orange and red) showing the terminal's operating mode

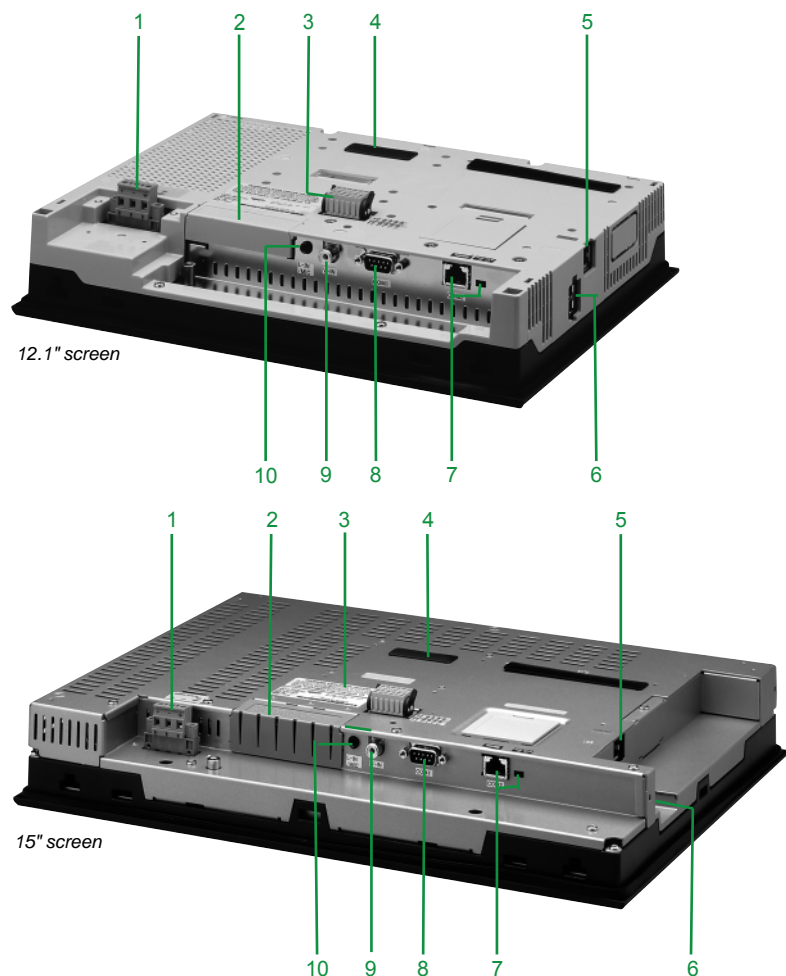

The rear panel comprises:

- 1 A removable screw terminal block for 24 V $\overline{\text{---}}$ power supply
- 2 A slot for Compact Flash memory card, with hinged cover
- 3 A removable I/O connector, 12 spring terminals for loudspeaker connection, one input (reset) and 3 outputs (alarm, buzzer, run)
- 4 An expansion unit interface for fieldbus communication card (Device Net, PROFIBUS DP) (1)
- 5 An RJ45 connector for Ethernet TCP/IP link, 10BASE-T/100BASE-TX, with an activity LED
- 6 Two USB type A host connectors for connecting peripherals, transferring applications and Modicon M340 terminal port communication
- 7 An RJ45 connector for RS 485 (COM2) with switch for polarization of the link used on Modbus
- 8 A 9-way male SUB-D connector for RS 232C or RS 422/485 serial link to PLCs (COM1)


On XBT GT6340 and XBT GT7340 only:

- 9 A mini-jack connector for connecting a microphone
- 10 An RCA connector for connecting a digital or analogue video camera (NTSC/PAL)

(1) See page 1/70 for details of the required connection accessories.

Description


Standard Advanced Panels Magelis Multifunction XBT GK2120 & XBT GK2330

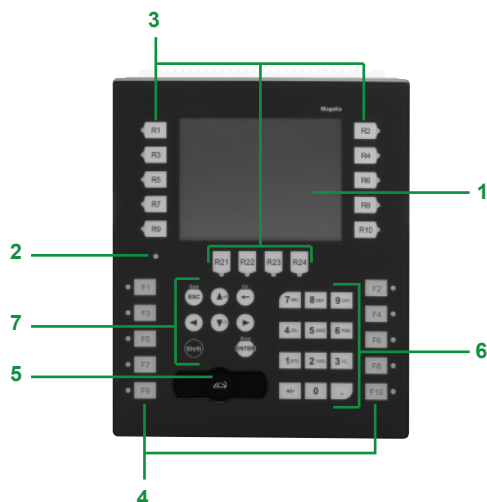

The front panel comprises:

- 1 A touch screen for displaying synoptic views (5.7" monochrome or colour), configurable using Vijeo Designer
- 2 A multicolour indicator (green, orange and red) showing the terminal's operating mode
- 3 14 dynamic keys (Ri) with 3-colour LED (green, orange, red)
- 4 10 static keys (Fi) with 3-colour LED (green, orange, red) and customizable labels
- 5 An industrial pointer "⌂", configurable using Vijeo Designer
- 6 12 alphanumeric keys (0...9, +/-. ,.), which can be pressed several times in succession to access characters (A...Z)
- 7 8 service keys:

- Delete character to left of cursor
- Move cursor to right or left in an entry field
- Confirm a selection or entry
- Access the second of the dual key functions
- Increment or decrement a numeric field value or activate the next or previous object
- Exit entry mode
- Display the configuration menu of the terminal
- Copy the current screen
- Delete entire field

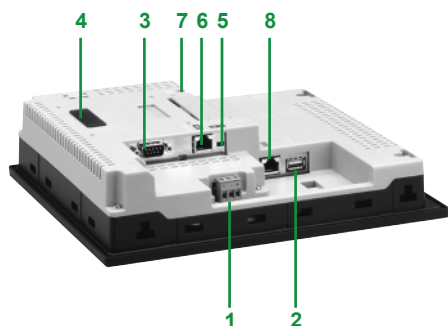

The rear panel comprises:

- 1 A removable screw terminal block for 24 V $\overline{\text{---}}$ power supply
- 2 A USB type A host connector for connecting peripherals, transferring applications and Modicon M340 terminal port communication
- 3 A 9-way male SUB-D connector for RS 232C or RS 422/485 serial link to PLCs (COM1)
- 4 An expansion unit interface for fieldbus communication card (Device Net, PROFIBUS DP) (1)
- 5 A switch for polarization of the COM2 serial link, used on Modbus
- 6 An RJ45 connector for RS 485 serial link (COM2)
- 7 A slot for Compact Flash memory card, with cover


On GK2330 only:

- 8 An RJ45 connector for Ethernet TCP/IP link, 10BASE-T/100BASE-TX


(1) See page 1/70 for details of the required connection accessories.

Description

Standard Advanced Panels Magelis Multifunction XBT GK5330

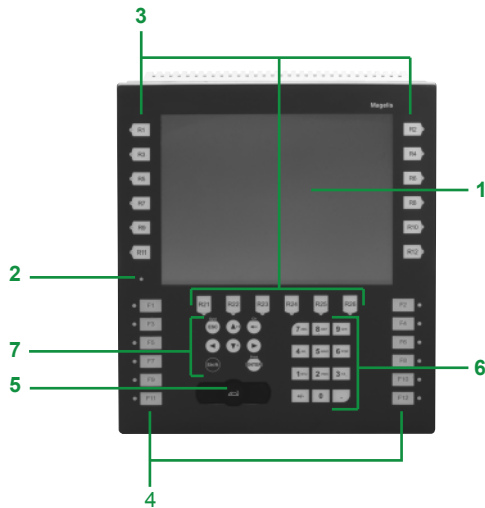

The front panel comprises:

- 1 A touch screen for displaying synoptic views (10.4" colour TFT), configurable using Vijeo Designer
- 2 A multicolour indicator (green, orange and red) showing the terminal's operating mode
- 3 18 dynamic keys (Ri) with 3-colour LED (green, orange, red)
- 4 12 static keys (Fi) with 3-colour LED (green, orange, red) and customizable labels
- 5 An industrial pointer "", configurable using Vijeo Designer
- 6 12 alphanumeric keys (0...9, +/-. , .), which can be pressed several times in succession to access characters (A...Z)
- 7 8 service keys:



Delete character to left of cursor



Move cursor to right or left in an entry field



Confirm a selection or entry



Access the second of the dual key functions



Increment or decrement a numeric field value or activate the next or previous object



Exit entry mode



Display the configuration menu of the terminal



Copy the current screen



Delete entire field

The rear panel comprises:


- 1 A removable screw terminal block for 24 V $\overline{\text{AC}}$ power supply
- 2 A slot for Compact Flash memory card, with hinged cover
- 3 A removable I/O connector, 12 spring terminals for loudspeaker connection, one input (reset) and 3 outputs (alarm, buzzer, run)
- 4 An expansion unit interface for fieldbus communication card (Device Net, PROFIBUS DP) (1)
- 5 An RJ45 connector for Ethernet TCP/IP link, 10BASE-T/100BASE-TX with an activity LED
- 6 Two USB type A host connectors for connecting peripherals, transferring applications and Modicon M340 terminal port communication
- 7 An RJ45 connector for RS 485 (COM2) with switch for polarization of the link used on Modbus
- 8 A 9-way male SUB-D connector for RS 232C or RS 422/485 serial link to PLCs (COM1)

(1) See page 1/70 for details of the required connection accessories.


Operator dialogue terminals

Standard Advanced Panels



Magelis™ GTW with 10.4" or 12" screen



Rear panel



Underside

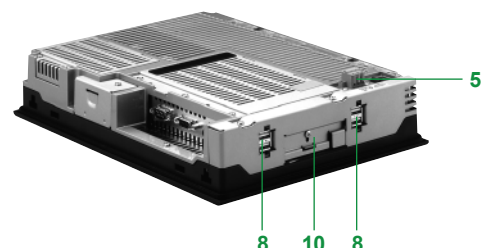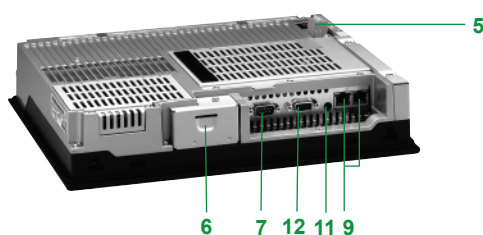

Description

Standard Advanced Panel Magelis Multifunction 10.4" HMI GTW 5354

Front panel screen

The touch screen front panel of terminal **HMI GTW 5354** comprises:

- 1 A 10.4" SVGA active matrix colour TFT LCD screen (maximum display area 800 x 600 points) with high-definition analogue touch panel
- 2 An aluminum alloy front panel with IP 65 membrane
- 3 A USB 2.0 port (1 A max.) with screw-on protective cover

Rear panel

The rear panel of terminal **HMI GTW 5354** comprises:

- 4 A battery
- 5 2 pushbuttons: 1 for the power supply and 1 for resetting
- 6 A slot for the Compact Flash memory card (SLC technology) ≥ 2 GB specifically for the operating system
- 7 An SD card reader for user data - SD card optional (1)
- 8 4 status and power supply LEDs

Underside

All the connection elements can be accessed from the rear of the terminal, with the following elements located on the lower face:

- 9 A removable screw terminal block for connecting 24 V $\overline{\text{---}}$ power supply
- 2 slots for Compact Flash card, one containing the operating system and integrated software and the other free
- 10 2 USB 2.0 ports
- 11 2 RJ45 connectors for Ethernet link, 10/100 BASE-TX/1 GB
- 12 One 9-way male SUB-D connector marked COM1 for RS 232 serial link

Standard Advanced Panel Magelis Multifunction 12" XBT GTW 652

Front panel screen

The touch screen front panel of terminal **XBT GTW 652** comprises:

- 1 A 12" SVGA active matrix colour TFT LCD screen (maximum display area 800 x 600 points) with high-definition analogue touch panel
- 2 An aluminum alloy front panel with IP 65 membrane (mounted on a hardened steel frame)
- 3 2 LEDs marked:
 - ☐ ON (green), terminal switched on
 - ☐ DISK (green), accessing IDE bus (accessing Compact Flash memory, etc.)
- 4 A USB port (dust and damp proof)

Underside and side panels

All expansion slots and connection elements can be accessed from the rear of the terminal, with the following elements located on the lower face:

- 5 A removable screw terminal block for connecting 24 V $\overline{\text{---}}$ power supply
- 6 A slot for the Compact Flash memory card containing the operating system and integrated software
- 7 A 25-way female SUB-D connector marked RAS for product monitoring and diagnostics
- 8 4 USB 2.0 ports
- 9 2 RJ45 connectors for Ethernet 10/100 Mbps and Ethernet 10/100 Base-TX/1 GB link
- 10 A slot for additional PCMCIA type II cards
- 11 A mini-jack connector for loudspeaker
- 12 A 9-way male SUB-D connector marked COM1 for RS 232 serial link

(1) To be ordered separately (see page 3/30).


1



15" front panels, stainless steel and aluminium



Rear panel



Underside

Description

Standard Advanced Panels Magelis Multifunction 15" HMI GTW 7354 and 73545

Front panel screen

The touch screen front panel of terminal **HMI GTW 7354/73545** comprises:

- 1 A 15" XGA active matrix colour TFT LCD screen (maximum display area 1024 x 768 points) with high-definition analogue touch panel
 - 2 A USB 2.0 port (1 A max.) with screw-on protective cover (only available for aluminium version). Captive protective cover option also available (1)
 - 3 An aluminum alloy front panel with IP 65 membrane
- or
- 4 A stainless steel 304 "Scotch brite®" brushed finish front panel enabling an IP 65 degree of protection of the front panel when mounted on a panel or an enclosure door. Mounted on 1.6...10 mm thick support using screw fasteners supplied (2). Cleaning simplified due to absence of USB port on front panel (conforms to food and beverage processing machines standard EN 1672-2). Version fitted with specific seals (standard FDA 21 CFR 177.206)

Rear panel

The rear panel of **HMI GTW 7354** and **HMI GTW 73545** terminals comprise:

- 5 A battery
- 6 2 pushbuttons: 1 for the power supply and 1 for resetting
- 7 A slot for the Compact Flash memory card (SLC technology) ≥ 2 GB specifically for the operating system
- 8 An SD card reader for user data - SD card optional (1)
- 9 4 status and power supply LEDs

Underside

All the connection elements can be accessed from the rear of the terminal, with the following elements located on the lower face:

- 12 A removable screw terminal block for connecting 24 V ~ power supply
- 13 2 USB 2.0 ports (1 A max.)
- 14 2 RJ45 connectors for Ethernet link, 10/100 BASE-TX/1 GB
- 15 One 9-way male SUB-D connector marked COM1 for RS 232 serial link

Pre-installed software

Magelis XBT GTW and HMI GTW terminals have the following software installed on the Compact Flash system card, in addition to Windows XP Embedded:

- Vijeo Designer Run-Time, unlimited use, supplied with activation code
- Vijeo Citect Web Client dll
- Internet Explorer
- Acrobat Reader
- Word/Excel/PowerPoint viewer
- Framework.Net

(1) To be ordered separately (see page 3/30).

(2) For installation, see the "Product data sheet" on our website www.schneider-electric.com.

Operator dialogue terminals


Standard Advanced Panels

Magelis™ XBT GH with 5.7" screen

Junction box XBT ZGJBOX, cables XBT ZGHL

1

Description

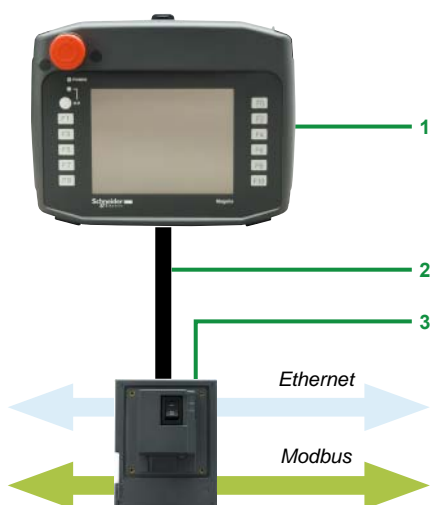

Overview

Magelis XBT GH2460 **1** and XBTGH2460B (without Emergency stop button) are portable graphic display terminals with a 5.7" touch screen. They enable connection on the Ethernet or Modbus network at any point where an XBT ZGJBOX junction box **3** is installed.

The connection between the terminal and junction box is established using an XBT ZGHL●● **2** cable, which is available in various lengths (1).

Standard Advanced Panels Magelis Multifunction XBT GH2460 and XBT GH2460B

The front panel comprises:

- 1** A touch screen for displaying synoptic views (5.7" colour), configurable using Vijeo Designer
- 2** A multicolour indicator (green, orange and red) showing the terminal's operating mode
- 3** 11 function keys Fi
- 4** An operating key with O.P. LED (green) for touch screen validation
- 5** An emergency stop button with 2 NC safety contacts and 1 NO auxiliary contact for stopping the machine if necessary (model XBT GH2460 only)



The rear panel comprises:

- 6** A USB type A host connector for peripheral connection and application transfer (with protective cover)
- 7** A slot for a Compact Flash memory card (also protected by the cover)
- 8** A key switch for switching the Magelis XBT GH on/off
- 9** A 3-position enabling grip switch for protecting the operator (the OK signal is only sent when the grip switch is in the centre position)
- 10** A 24-way connector for connecting the 3 m or 10 m flexible interface cable between the Magelis XBT GH and the junction box
- 11** A stylus for the touch screen
- 12** Two holes for inserting re-usable labels in the function keys

(1) To be ordered separately (see page 1/60).

1

Description (continued)



XBT ZGJBOX junction box for XBT GH

It comprises:

- 1 A 9-way SUB-D connector for RS 232C or RS 422/485 serial link to PLCs (COM1)
- 2 An ON/OFF switch for the junction box
- 3 An RJ45 connector for Ethernet TCP/IP link, 10BASE-T/100BASE-TX
- 4 A 24-way screw terminal block for connecting 24 V \pm power supply and output signals from the Magelis XBT GH terminal
- 5 An LED indicating the status of the link with the Magelis XBT GH, 3 colours (green, orange and red)
- 6 2 thumbwheels for configuring the station number on the junction box
- 7 A 32-way connector for connecting the Magelis XBT GH terminal using flexible cable (XBT ZGHL)

Flexible cables XBT ZGHL

For connecting the Magelis XBT GH terminals to their XBT ZGJBOX junction boxes.

- 4 cable lengths are available:
- 3 m, cable XBT ZGHL3
 - 5 m, cable XBT ZGHL5
 - 10 m, cable XBT ZGHL10
 - 20 m, cable XBT ZGHL20 with the following limitations applying to the junction box: no RS 232C serial link, an isolation box cannot be used and a 24 V \pm supply voltage tolerance of approximately 10%.



XBT GT1105/1135



XBT GT2100/2220/2330



XBT GT4230/4300



XBT GT5300



XBT GT6300



XBT GT7340

Monochrome touch screen terminals ⁽¹⁾

Type of screen	Number of ports	Application memory capacity	Compact Flash memory	Composite video input	Number of Ethernet ports	Reference	Weight kg
Optimum, 3.8" QVGA screen							
STN	1 COM1	32 MB	No	No	–	XBT GT1105	–
Amber or red	1 USB				1	XBT GT1135	
Optimum, 5.7" QVGA screen							
STN	1 COM1	16 MB	No	No	–	XBT GT2110	1.000
Blue mode	1 COM2						
	1 USB						
Multifunction, 5.7" QVGA screen							
STN	1 COM1	16 MB	Yes	No	–	XBT GT2120	1.000
Black and white	1 COM2				1	XBT GT2130	1.000
	1 USB						

Colour touch screen terminals ⁽¹⁾

Type of screen	Number of ports	Application memory capacity	Compact Flash memory	Composite video input	Embedded Ethernet	Reference	Weight kg
Optimum, 3.8" QVGA screen							
TFT	1 COM1	32 MB	No	No	1	XBT GT1335	1.000
	1 USB						
Multifunction, 5.7" QVGA screen							
STN	1 COM1	16 MB	Yes	No	–	XBT GT2220	1.000
	1 COM2						
	1 USB						
TFT	1 COM1	16 MB	Yes	No	1	XBT GT2330	1.000
	1 COM2						
	1 USB						
TFT High Brightness	1 COM1	16 MB	Yes	No	1	XBT GT2930	1.000
	1 COM2						
	1 USB						
Multifunction, 5.7" VGA screen							
TFT	1 COM1	32 MB	Yes	No	1	XBT GT2430	–
	1 COM2						
	2 USB						
Multifunction, 7.5" VGA screen							
STN	1 COM1	32 MB	Yes	No	1	XBT GT4230	1.800
	1 COM2						
	1 USB						
TFT	1 COM1	32 MB	Yes	No	1	XBT GT4330	1.800
	1 COM2			Yes	1	XBT GT4340	1.800
	1 USB						
Multifunction, 10.4" VGA screen							
STN	1 COM1	32 MB	Yes	No	1	XBT GT5230	3.000
	1 COM2						
	2 USB						
TFT	1 COM1	32 MB	Yes	No	1	XBT GT5330	2.500
	1 COM2			Yes	1	XBT GT5340	2.500
	2 USB						
Multifunction, 10.4" SVGA screen							
TFT	1 COM1	32 MB	Yes	No	1	XBT GT5430	2.500
	1 COM2						
	2 USB						
Multifunction, 12.1" SVGA screen							
TFT	1 COM1	32 MB	Yes	No	1	XBT GT6330	3.000
	1 COM2			Yes	1	XBT GT6340	3.000
	2 USB						
Multifunction, 15" XGA screen							
TFT	1 COM1	32 MB	Yes	Yes	1	XBT GT7340	5.600
	1 COM2						
	2 USB						

(1) Fixing kit (screw clips), locking device for USB connectors (except XBT GT 1100) and instruction sheet included with terminals. Setup documentation for XBT GT terminals is included in electronic format with Vijeo Designer configuration software (see page 4/13).

1



XBT GK2120/2330



XBT GK5330



XBT GH2460



XBT ZGJBOX



XBT ZGHL●●

Keypad/touch screen terminals (1)

Type of screen	Number of ports	Application memory capacity	Compact Flash memory	Video input	Number of Ethernet ports	Reference	Weight kg
Multifunction, 5.7" screen							
STN Black and white	1 COM1 1 COM2 1 USB	32 MB	Yes	No	–	XBT GK2120	–
Multifunction, 5.7" screen							
TFT Colour mode	1 COM1 1 COM2 1 USB	32 MB	Yes	No	1	XBT GK2330	–
Multifunction, 10.4" screen							
TFT Colour mode	1 COM1 1 COM2 2 USB	32 MB	Yes	No	1	XBT GK5330	–

Portable touch screen terminals

Type of front panel	Number of ports	Application memory capacity	Compact Flash memory	Video input	Number of Ethernet ports	Reference	Weight kg
Multifunction, 5.7" screen							
TFT colour mode screen and Emergency stop button	1 COM1 1 USB	32 MB	Yes	No	1	XBT GH2460 (2)	–
TFT colour mode screen	1 COM1 1 USB	32 MB	Yes	No	1	XBT GH2460B (2)	–

Connection components

Description	Usage	Length	Reference	Weight kg
Junction box for XBT GH	Specifically for the XBT GH terminal, it enables: <ul style="list-style-type: none"> ■ 24 V $\overline{\text{---}}$ power supply to XBT GH terminal ■ Connection of various safety inputs/outputs ■ Connection on multiprotocol serial link (9-way SUB-D) or Ethernet TCP/IP (RJ45) Can be mounted on 35 mm U rail	–	XBT ZGJBOX (2) (3)	–
Interface cable for XBT GH	For connecting XBT GH terminal to junction box XBT ZGJBOX	3 m	XBT ZGHL3	–
		5 m	XBT ZGHL5	–
		10 m	XBT ZGHL10	–
		20 m	XBT ZGHL20 (4)	–

(1) Fixing kit (spring clips), locking device for USB connectors, customizable label sheets and instruction sheet included with terminals.

(2) The XBT GH terminal is connected to junction box XBT ZGJBOX using the cable XBT ZGHL●●, to be ordered separately (see table below).

(3) A junction box is required at each XBT GH terminal connection point.

(4) With this cable, the following limitations apply to the junction box:

- no RS 232C serial link
- an isolation box cannot be used
- 24 V $\overline{\text{---}}$ supply voltage tolerance of approximately 10%

Operator dialogue terminals

Standard Advanced Panels

Magelis™ GTW with 10.4", 12" or 15" screen



HMI GTW5354



XBT GTW652



HMI GTW7354

Open touch screen terminals ⁽¹⁾

Type of screen	Number of ports	Application memory capacity on primary storage device	Secondary storage device	Video input	Number of Ethernet ports	Reference	Weight kg
Multifunction, 10.4" screen							
TFT	1 COM1 3 USB	2 GB CF card for system and application	SD card ≥ 4 GB	No	2	HMI GTW5354	4.100
Multifunction, 12" screen							
TFT	1 COM1 5 USB	2 GB CF card for system and application	CF card ≥ 1 GB	No	2	XBT GTW652	3.800
Multifunction, 15" screen							
TFT	1 COM1 3 USB	2 GB CF card for system and application	SD card ≥ 4 GB	No	2	HMI GTW7354	6.100
	1 COM1 2 USB	2 GB CF card for system and application	SD card ≥ 4 GB	No	2	HMI GTW7354S	6.300

(1) Fixing kit (screw clips), locking device for USB connectors and instruction sheet included with terminals.
Setup documentation for GTW terminals is included in electronic format with Vijeo Designer configuration software (see page 4/13).

Operator dialogue terminals

Magelis™ Advanced Panels

Separate parts for terminals

Magelis GT/GTO/GK/GH/GTW

1



XBTZGM256

Separate components

Description	Characteristics	Compatible with terminals	Reference	Weight kg
Compact Flash memory cards	128 MB, blank	XBT except XBT GT1●●●/GT2110 and XBT GTW	XBT ZGM128	0.050
	256 MB, blank		XBT ZGM256	0.050
	512 MB, blank		MPC YN0 0CFE 00N	0.050
	1 GB, blank	XBT except XBT GT1●●● / GT2110 XBT GTW only	MPC YN0 0CF1 00N	—
	2 GB, blank		MPC YN0 0CF2 00N	—
	4 GB, blank		MPC YN0 0CF4 00N	—
SD memory card	4 GB, blank	HMI GTO and HMI GTW only	HMI ZSD4G	—
Maintenance kits	Includes fixings and seals for panel mounting	MPC ST1 1N●J 00T (8.4" screen)	MPC YK1 0MNT KIT	—
		MPC ST2 1N●J20● (12" screen)	MPC YK2 0MNT KIT	—
		MPC ST5 2NDJ 10 (15" screen)	MPC YK5 0MNT KIT	—
Protective sheets (5 peel-off sheets)	—	XBT GT1105 / GT1135 / GT1335	XBT ZG60	—
		XBT GT21●0 / GT2220 / GT2●30	XBT ZG62	0.200
		XBT GT4230 / GT43●0	XBT ZG64	0.200
		XBT GT53●0 / XBT GT54●0	XBT ZG65	0.200
		XBT GT5230 / GT63●0	XBT ZG66	0.200
		XBT GK 2●●0 / GH2460	XBT ZG68	—
		XBT GK 5330	XBT ZG69	—
		XBT GT7340 / HMI GTW 7353	MPC YK5 0SPS KIT	0.200
		XBT GTW652	MPC YK2 0SPS KIT	—
		HMI GTO1300 / 1310	HMI ZG60	—
		HMI GTO2300 / 2310 / 2315	HMI ZG62	—
		HMI GTO3510	HMI ZG63	—
		HMI GTO4310	HMI ZG64	—
		HMI GTO5310 / 5315	HMI ZG65	—
		HMI GTO6310 / 6315	HMI ZG66	—
Plastic protective covers Sold in lots of 5	—	XBT GT2●●●	XBT ZG70	—
		XBT GT53●●	XBT ZG71	—
Plastic covers for harsh environments (IP 67 protection)	—	HMI GTO1300 / HMI GTO1310	HMI ZECOV1	—
		HMI GTO2300 / HMI GTO2310	HMI ZECOV2	—
		HMI GTO3510 / HMI GTO4310	HMI ZECOV4	—
		HMI GTO5310 / HMI GTO5315	HMI ZECOV5	—
		HMI GTO6310 / HMI GTO6315	HMI ZECOV6	—

Separate components (continued)

Description	Characteristics	Compatible with terminals	Reference	Weight kg
Spring fixing clips Sold in lots of 12	Number of spring clips depending on terminal	XBT GT	XBT Z3002	–
Wall mounting kit	Fixing components for mounting XBT GH terminal on a wall	XBT GH	XBT ZGWMKT	–
Neck strap	For use with XBT GH hand-held terminal	XBT GH	XBT ZGNSTP	–
Cover for shunt Emergency stop on junction box	Enables deactivation of the junction box terminal without activating the Emergency stop (requires installation of external switching system)	XBT GH	XBT ZGHCAP	–



XBT ZGCO●

Description	Description	Length m.	Reference	Weight kg
Mechanical adaptors for substitution of terminals of the Magelis range	From XBT F032●10 to XBT GT2●●0	–	XBT ZGCO1	–
	From XBT G2110 to XBT GT2●●0	–	XBT ZGCO2	–
	From XBT F034●●● to XBT GT53●0	–	XBT ZGCO3	–
	From XBT G5330 to XBT GT5330 From XBT GT5230 to HMI GTO5310	–	XBT ZGCO4	–



XBT ZGUSB

Remote USB port for terminals XBT GT2●●0...GT7340, XBT GT1●●5, XBT GK●●●, XBT GTW●●●	Enables the USB type A port to be located remotely on the rear of the XBT terminal on a panel or enclosure door (Ø 21 mm fixing device)	1	XBT ZGUSB	–
Remote USB port for terminals XBT GT2●●0...GT7340, XBT GT1●●5, XBT GK●●●, XBT GTW●●● HMI GTO	Enables the USB mini-B port to be located remotely on the rear of the XBT or HMI GTO terminal on a panel or enclosure door (Ø 21 mm fixing device)	1	XBT ZGUSBB	–
Remote USB port for HMI GTO panel	Enables the USB mini-B port to be located remotely on the rear of the HMI GTO panel, on a panel or enclosure door (Ø 21 mm fixing device)	1	HMI ZSUSBB	–
Adaptor for Compact Flash cards	Enables a PC with a PCMCIA card slot to take a Compact Flash card	–	XBT ZGADT	0.050

Operator dialogue terminals

Magelis™ Advanced Panels

Replacement parts for terminals

Magelis GT/GTO/GK/GH/GTW

1

Spare parts			
Description	For use with terminals	Reference	Weight kg
Seals	XBT GH (for junction box)	XBT ZG5H	–
	XBT GT1105 / GT1135 / GT1335	XBT ZG51	0.030
	XBT GT21●0 / GT2220 / GT2330	XBT ZG52	0.030
	XBT GT4230 / GT43●0	XBT ZG54	0.030
	XBT GT53●0	XBT ZG55	0.030
	XBT GT5230 / GT63●0	XBT ZG56	0.030
	XBT GT7340	XBT ZG57	0.030
	XBT GK2●●0	XBT ZG58	–
	XBT GK5330	XBT ZG59	–
	HMI GTO1300 / 1310	HMI ZG51	–
	HMI GTO2300 / 2310	HMI ZG52	–
	HMI GTO2315	HMI ZG522	–
	HMI GTO3510 / 4310	HMI ZG54	–
	HMI GTO5310	HMI ZG55	–
	HMI GTO5315	HMI ZG552	–
	HMI GTO6310	HMI ZG56	–
	HMI GTO6315	HMI ZG562	–
Backlighting lamps	XBT GT5230	XBT ZG43	0.100
	XBT GT53●0	XBT ZG45	0.200
	XBT GT53●0 PV ≥ 3 / XBT GT54●0	XBT ZG45B	0.200
	XBT GT63●0	XBT ZG46	0.200
	XBT GT7340	XBT ZG47	0.200
USB fastenings Sold in lots of 5	XBT GT2●●0 / GT4●●0	XBT ZGCLP1	–
	XBT GT1●●5 / GT5●●0 / GT6●●0 / GT7●●0	XBT ZGCLP2	–
	XBT GK	XBT ZGCLP3	–
	HMI GTO (USB type A)	HMI ZGCLP1	–
	HMI GTO (USB type mini-B)	HMI ZSCLP3	–
Fixing kit	4 clips and screws (max. tightening torque: 0.5 Nm), supplied with all XBT GT terminals	XBT ZG FIX	0.100
	4 clips and screws (max. tightening torque: 0.5 Nm), supplied with all HMIGTO●●●0 terminals	HMI ZGFIX	0.030
	8 nuts and 4 L-shaped brackets, supplied with all HMIGTO●●●5 terminals	HMI ZGFIX2	0.030
Extension connector protection	XBT GT/GK, except XBT GT1●●●	XBT ZGCNC	0.030
Power supply connector Sold in lots of 5	XBT GT1●●● / GT2●●● / GT4●●●	XBT ZGPWS1	0.030
	XBT GK2●●●		
	XBT GT5●●● / 6●●● / 7●●●	XBT ZGPWS2	–
	XBT GK5●●●		
	XBT GTW●●●		
	HMI GTO (direct connection)	HMI ZGPWS	0.030
	HMI GTO (right angle connection)	HMI ZGPWS2	0.030
Auxiliary connector	XBT GT4●●● / 5●●● / 6●●● / 7●●●, XBT GK5●●●	XBT ZGAUX	–
Sheets of customizable labels for XBT GK/GH terminals Sold in lots of 10	XBT GK2●●0	XBL YGK2	0.030
	XBT GK5●●●	XBL YGK5	–
	XBT GH	XBL YGH2	–
Sheets of customizable labels for HMI GTO terminals	HMI GTO1300 / 1310	HMI ZLYGO1	–
	HMI GTO3510	HMI ZLYGO3	–
Stylus Sold in lots of 5	XBT GH	XBT ZGPEN	–
Emergency stop button protection	XBT GH	XBT ZGESGD	–
Hand strap	XBT GH	XBT ZGHSTP	–
Battery	HMI GTO except HMI GTO1300 / 1310 / 2300	HMI ZGBAT	–

Cables for application transfer - Terminal to PC

Type of terminal (terminal end connector)	Connector (PC end)	Type	Length m	Reference (1)	Weight kg
XBT GT2●●0...GT7340, XBT GT1●●5, XBT GK, XBT GH XBT GTW	USB	TTL	2	XBT ZG935	0.290
HMI GTO	USB	USB	1.80	BMX XCAUSBH018	—

Printer connection cables

Type of printer (2)	Connector (printer end)	Type	Length m	Reference	Weight kg
Serial printer for XBT GT/GK/GTW terminals (except XBT GT1●●●) and HMI GTO panels (except HMI GTO1310)	SUB-D female 25-way	RS 232C (COM1)	2.5	XBT Z915	0.200
Serial printer for XBT GT/GK/GTW terminals and HMI GTO panels	USB	RS 232C (COM1)	1.80	HMI ZURS	—

Adaptors and isolation boxes for XBT terminals and HMI GTO panels

These 3 adaptors are used with the connection cables depending on the application concerned.

For example, the XBT Z968 cable is used with the XBT ZG909 adaptor, to connect a Twido controller (via its terminal port) to an XBT GT2●●0 terminal (via its COM1 port).

Description	Type of connector (automation product end)	Physical link (XBT or HMI GTO terminal end)	Length m	Reference	Weight kg
Adaptor for XBT GT1●●● (COM1 port) XBT GT2●●0...7340 XBT GK (COM2 port) HMI GTO	25-way SUB-D connector	RJ 45 connector	0.2	XBT ZG939	—
Adaptors for XBT GT2●●0...7340 XBT GK (COM1 port) XBT GTW (COM1 and COM2 ports) HMI GTO (COM1 port)	25-way SUB-D connector	9-way SUB-D connector, RS 485 on XBT terminal only	0.2	XBT ZG909 (3)	—
		9-way SUB-D connector, RS 232C	0.2	XBT ZG919	—



XBT ZGI485

Description	For use with	Link to isolate	Reference	Weight kg
Serial link isolation units for XBT GT2●●0...7340 XBT GK HMI GTO	- Connection to serial port of XBT terminal - Isolated link on 9-way SUB-D connector (4) - Box power supply via USB port of terminal. Incorporates a USB port expander.	RS 232C/RS 485 (COM1)	XBT ZGI232	—
		RS 485 (COM2)	XBT ZGI485	—

(1) Cable included (depending on model) with Vijeo Designer software packages (see page 4/13).

(2) Parallel printer (see page 1/37).

(3) This adaptor cannot be used with Magelis GTO terminals.

(4) Male connector with XBT ZGI232, female connector with XBT ZGI485.

Operator dialogue terminals

Magelis™ Advanced Panels

Connection accessories for terminals

Magelis GT/GTO/GK/GH/GTW

1

Cables for connecting Magelis terminals to other Schneider Electric products

Automation product type	Type of connector (automation product end)	Protocol	Type of terminal	Link	On port	Length m	Reference	Weight kg
Twido, Nano, Modicon TSX Micro, Modicon Premium	Terminal port, 8-way female mini-DIN	Uni-TE (V1/V2), Modbus	XBT GT1●●●	RS 485	COM1	2.5	XBT Z9780	0.180
			XBT GT2●●0...7340 XBT GK HMI GTO		COM2	10	XBT Z9782	–
			XBT GT2●●0...7340 XBT GK	RS 485	COM1	2.5	XBT Z968 + (2)	0.180
						5	XBT Z9681 + (2)	0.340
			XBT GT2●●0...7340 XBT GK XBT GH (Junction box)	RS 485	COM1	2.5	XBT Z9018	0.170
Modicon M340 Modicon M238 Modicon M258	RJ45	Modbus	XBT GT1●●● HMI GTO XBT GT2●●0...7340 XBT GK	RS 485	COM1	2.5	XBT Z9980	0.230
					COM2	10	XBT Z9982	–
			XBT GT2●●0...7340 XBT GK XBT GH (Junction box)	RS 485	COM1	1.8	XBT Z938 + (2)	0.230
						2.5	XBT Z9008	–
			XBT GT (4) XBT GK/GTW HMI GTO	USB	USB type A	1.8 4.5	BMX XCA USB H018 BMX XCA USB H045	0.230 –
Modicon Premium with TSX SCY 2160●	25-way female SUB-D	Uni-TE (V1/V2)	XBT GT1●●●	RS 485	COM1	2.5	XBT Z918 + (1)	0.230
			XBT GT2●●0...7340 XBT GK XBT GH (Junction box)	RS 485	COM1	2.5	XBT Z918 + (2)	0.230
Modicon Quantum	9-way male SUB-D	Modbus	XBT GT1●●●	RS 232C	COM1	2.5	XBT Z9710 + (1)	0.210
			XBT GT2●●0...7340 XBT GK / GTW XBT GH (Junction box) HMI GTO	RS 232C	COM1	2.5	XBT Z9710 + (3)	0.210
						3.7	990 NAA 263 20	0.290
Modicon STB	HE13 (NIM, network interface module)	Modbus	XBT GT1●●●	RS 232C	COM1	2.5	XBT Z988 + (1) XBT Z9715	0.220 –
			XBT GT2●●0...7340 XBT GK / GTW XBT GH (Junction box) HMI GTO	RS 232C	COM1	2	STB XCA 4002	0.210
						2.5	XBT Z988 + (3)	0.220
Modicon Momentum M1	RJ45 (port 1 on Momentum M1)	Modbus	XBT GT1●●●	RS 232C	COM1	2.5	XBT Z9711 + (1)	0.210
			XBT GT2●●0...7340 XBT GK XBT GTW XBT GH (Junction box) HMI GTO	RS 232C	COM1	2.5	XBT Z9711 + (3)	0.210
TeSys U, T starters ATV 312/61/71 variable speed drives ATS 48 starters Lexium 05 Preventa XPSMC	RJ45	Modbus	XBT GT1●●●	RS 485	COM1	3	VW3 A8 306 R30	0.060
			XBT GT2●●0...7340 XBT GK HMI GTO		COM2	2.5 10	XBT Z9980 XBT Z9982	– –
			XBT GT2●●0...7340 XBT GK XBT GH (Junction box)	RS 485	COM1	2.5	XBT Z9008	–

(1) Adaptor **XBT ZG939** to be used with cables with " + (1) " after the reference.(2) Adaptor **XBT ZG909** to be used with cables with " + (2) " after the reference.(3) Adaptor **XBT ZG919** to be used with cables with " + (3) " after the reference.(4) Except **XBT GT1●●0**.

TSX PCX 1031

Cables and adaptors for connecting Magelis terminals to third-party PLCs

Mitsubishi, Melsec PLCs

Description Driver used	Type of terminal	Type of connector (fitted to cable, excluding adaptor)	Physical link (COM1)	Length m	Reference	Weight kg
Connection cable, A CPU (SIO)	XBT GT2●●0...7340 XBT GK XBT GH (Junction box)	9-way SUB-D 25-way SUB-D	RS 422	5	XBT ZG9773	—
Connection cable, Q Link (SIO)	XBT GT2●●0...7340 XBT GK / GTW XBT GH (Junction box) HMI GTO	9-way SUB-D 9-way SUB-D	RS 232C	5	XBT ZG9772	—
Connection cable, Q CPU (SIO)	XBT GT2●●0...7340 XBT GK / GTW XBT GH (Junction box) HMI GTO	9-way SUB-D mini-DIN	RS 232C	5	XBT ZG9774	—
Connection cable, A Link (SIO)	XBT GT2●●0...7340 XBT GK / GTW XBT GH (Junction box) HMI GTO	9-way SUB-D 25-way SUB-D	RS 232C	5	XBT ZG9731	—
Connection cable, FX (CPU)	XBT GT2●●0...7340 XBT GK XBT GH (Junction box)	9-way SUB-D mini-DIN	RS 422	5	XBT ZG9775	—
	XBT GT1●●●	25-way SUB-D mini-DIN	RS 422	5	XBT Z980 + (1)	—
	HMI GTO	9-way SUB-D mini-DIN	RS 232/ RS 422	5	HMI Z951 ▲	—
Cable for 2-port adaptor, FX (CPU), A CPU (SIO) QnA CPU (SIO)	XBT GT2●●0...7340 XBT GK XBT GH (Junction box)	9-way SUB-D Flying leads	RS 422	5	XBT ZG9778 + (4)	—
Adaptor unit FX (CPU), A CPU (SIO) QnA CPU (SIO)	XBT GT2●●0...7340 XBT GK XBT GH (Junction box)	2-port unit Screw terminals / 2 x 9-way SUB-D	RS 422	—	XBT ZG979	—



XBT ZG9772



XBT ZG9731

Omron, Sysmac PLCs

Description Driver used	Type of terminal	Type of connector (fitted to cable, excluding adaptor)	Physical link (COM1)	Length m	Reference	Weight kg
Connection cables, Link (SIO)	XBT GT1●●●	25-way SUB-D 9-way SUB-D	RS 232C	2.5	XBT Z9740 + (1) XBT Z9743	0.210 —
	XBT GT2●●0...7340 XBT GK/GTW XBT GH (Junction box) HMI GTO	9-way SUB-D 9-way SUB-D 9-way SUB-D 25-way SUB-D	RS 232C	5	XBT ZG9740 XBT ZG 9731	— —
Connecting cables FINS (SIO)	XBT GT1●●●	25-way SUB-D 9-way SUB-D	RS 232C	2.5	XBT Z9740 + (1) XBT Z9743	0.210 —
	XBT GT2●●0...7340 XBT GK/GTW XBT GH (Junction box) HMI GTO	9-way SUB-D 9-way SUB-D	RS 232C	5	XBT ZG9740	—

(1) Adaptor **XBT ZG939** to be used with cables with " + (1) " after the reference (see page 1/65).(4) Adaptor **XBT ZGCOM1** (9-way female/female SUB-D) to be used with cables with " + (4) " after the reference (**XBT ZG9778**).



XBT ZG9731

Cables and adaptors for connecting Magelis terminals to third-party PLCs (continued)

Rockwell Automation, Allen-Bradley PLCs

Description Driver used	Type of terminal	Type of connector (fitted to cable, excluding adaptor)	Physical link (COM1)	Length m	Reference	Weight kg
Connection cables <i>DF1 Full Duplex</i>	XBT GT1●●●	25-way SUB-D 9-way SUB-D	RS 232C	2.5	XBT Z9730 + (1) XBT Z9733	0.210 –
		25-way SUB-D 8-way mini-DIN	RS 232C	2.5	XBT Z9731 + (1)	0.210
	XBT GT2●●0...7340 XBT GK/GTW XBT GH (Junction box) HMI GTO	9-way SUB-D 25-way SUB-D	RS 232C	5	XBT ZG9731	–
Connection cables, <i>DH485</i>	XBT GT1●●●	25-way SUB-D 9-way SUB-D	RS 232C	2.5	XBT Z9734	–
		25-way SUB-D 8-way mini-DIN	RS 485	5	XBT Z9732 + (1)	–
	XBT GT2●●0...7340 XBT GK XBT GH (Junction box) HMI GTO	25-way SUB-D 8-way mini-DIN	RS 485	5	XBT Z9732 + (2)	–
		9-way SUB-D	RS 485	5	XBT Z9732 + (1)	–

Siemens, Simatic PLCs

Description Driver used	Type of terminal	Type of connector (fitted to cable, excluding adaptor)	Physical link	Length m	Reference	Weight kg
Connection cable, <i>PPI, S7 200</i>	XBT GT1●●●	RJ45/9-way SUB-D	RS 485 (COM1)	2.5	XBT ZG9721	–
	XBT GT2●●0...7340 XBT GK HMI GTO	RJ45/9-way SUB-D	RS 485 (COM2)			
Connection cables, <i>MPI port, S7 300/400</i>	XBT GT2●●0...7340 XBT GK/GTW XBT GH (Junction box) HMI GTO	9-way SUB-D 9-way SUB-D	RS 232C (COM1)	3	XBT ZG9292	–
	XBT GT2●●0...7340 XBT GK HMI GTO	RJ45/flying leads other end	RS 485 (7) (COM2)	3	VW3 A8 306 D30	0.150
		RJ45/9-way SUB-D	RS 485 (7) (COM1 or COM2) (8)	2.5	XBT ZG9721	–

Customizable cables

Description Driver used	Terminal type	Type of connector (fitted to cable, excluding adaptor)	Physical link	Length m	Reference	Weight kg
Universal cable, RS 422	XBT GT2●●0...7340 XBT GK XBT GH (Junction box)	9-way SUB-D/flying leads other end	RS 422 (COM1)	2.5	XBT ZG9722	0.210
Universal adaptor, RS 422/485	XBT GT2●●0...7340 XBT GK XBT GH (Junction box)	9-way SUB-D/Screw terminal	RS 422 (COM1)	–	XBT ZG949 + (5)	–
		9-way SUB-D/Screw terminal	RS 485 (COM2)	–	XBT ZG949 + (6)	–

(1) Adaptor **XBT ZG939** to be used with cables with " + (1) " after the reference (see page 1/65).(2) Adaptor **XBT ZG909** to be used with cables with " + (2) " after the reference (see page 1/65).(5) Cable to be created by user and used in conjunction with 9-way female/female SUB-D adaptor **XBT ZGCOM1**.(6) Cable to be created by user and used in conjunction with isolation box **XBT ZGI485** and 9-way male/female SUB-D adaptor **XBT ZGCOM2**.(7) Non-isolated RS 485 serial link, 12 Mbps (187.5 kbps with **XBT GT11●0/2110**).

(8) COM1 for HMI GTO1310, COM2 for the other terminals.



TSX SCA 62



TSX PACC 01



TSX SCA 64



LU9 GC3



VW3 A8 306 TF10



TWDXCAISO

Connection of Magelis terminals via serial links and Ethernet network

Type of bus/ network	Tap-off units	Connector (tap-off unit side)	Terminal type	Length m	Reference	Weight kg
Uni-Telway serial link	Subscriber socket TSX SCA 62	15-way female SUB-D	XBT GT1●●● (COM1)	3	VW3 A8 306	0.150
			XBT GT2●●●0...7340 XBT GK (COM2) HMI GTO			
			XBT GT2●●●0...7340 XBT GK (COM1) XBT GH (Junction box)	1.8	XBT Z908 + (2)	0.240
	Connection box TSX P ACC01	8-way female mini-DIN	XBT GT1●●● (COM1)	2.5	XBT Z9780	0.180
			XBT GT2●●●0...7340 XBT GK (COM2) HMI GTO			
			XBT GT2●●●0...7340 XBT GK (COM1) XBT GH (Junction box)	2.5	XBT Z9018	—
Modbus serial link	Subscriber socket TSX SCA 64	15-way female SUB-D	XBT GT1●●● (COM1)	3	VW3 A8 306	0.150
			XBT GT2●●●0...7340 XBT GK (COM2) HMI GTO			
			XBT GT2●●●0...7340 XBT GK (COM1) XBT GH (Junction box)	1.8	XBT Z908 + (2)	0.240
	8-port Modbus splitter box LU9 GC3 2-port tap-off junction TWDXCAISO TWDXCAT3RJ	RJ45	XBT GT1●●● (COM1)	3	VW3 A8 306R30	0.060
				2.5	XBT Z9980	—
			XBT GT2●●●0...7340 XBT GK (COM1) XBT GH (Junction box)	2.5	XBT Z9008	—
Ethernet TCP/IP network	Hubs 499 NEH/NOH Switches 499 NES, 499 NMS, 499 NSS and 499 NOS	RJ45	XBT GT1●●● (COM1)	1	VW3 A8 306 TF10	—
			XBT GT2●●●0...7340 XBT GK (COM2) HMI GTO			
			XBT GT●●●30 / ●●40	2	490 NTW 000 02	—
			XBT GK●●●30	5	490 NTW 000 05	—
			XBT GTW●●●	12	490 NTW 000 12	—
			XBT GH (Junction box) HMI GTO	40 80	490 NTW 000 40 490 NTW 000 80	— —

(2) Adaptor XBT ZG909 to be used with cables with " + (2) " after the reference (see page 1/65).

Operator dialogue terminals

Magelis™ Advanced Panels

Connection accessories for terminals

Magelis GT/GTO/GK/GH/GTW

1

Connection of Magelis terminals to fieldbuses

Type of bus/network	Connection components	Type of terminal	Reference	Weight kg
FIPWAY, FIPIO	USB gateway	XBT GT / GK (1) HMI GTO	TSX CUSBFIP	—
Modbus Plus	USB gateway	XBT GT / GK (1) HMI GTO	XBT ZGUMP	—
		XBT GTW	TSX CUSBMBP	—
Profibus DP	Card on expansion bus	XBT GT / GK (1)	XBT ZGPDP	—
Device Net	Card on expansion bus	XBT GT / GK (1)	XBT ZGDVN	—

Modular regulated switch mode power supplies (2)

Input voltage/ Output voltage	Combination with terminals	Nominal power	Nominal current	Reference	Weight kg
100...240 / 24 V single-phase wide range line supply 47...63 Hz	XBT GT1100...6340 XBT GK / GH	30 W	1.2 A	ABL 8MEM24012	0.195
	XBT GT7340 / GTW	60 W	2.5 A	ABL 7RM24025	0.255




ABL 7RM24025

(1) Except XBT GT1●●●.


(2) Dimensions: H x W x D = 90 x 54 x 59 mm (ABL 8MEM24012) and 90 x 72 x 59 mm (ABL 7RM24025). For further information, please consult our website www.schneider-electric.com.

XBT GT11●5 terminals, HMI GTO1310 terminals and Schneider Electric products

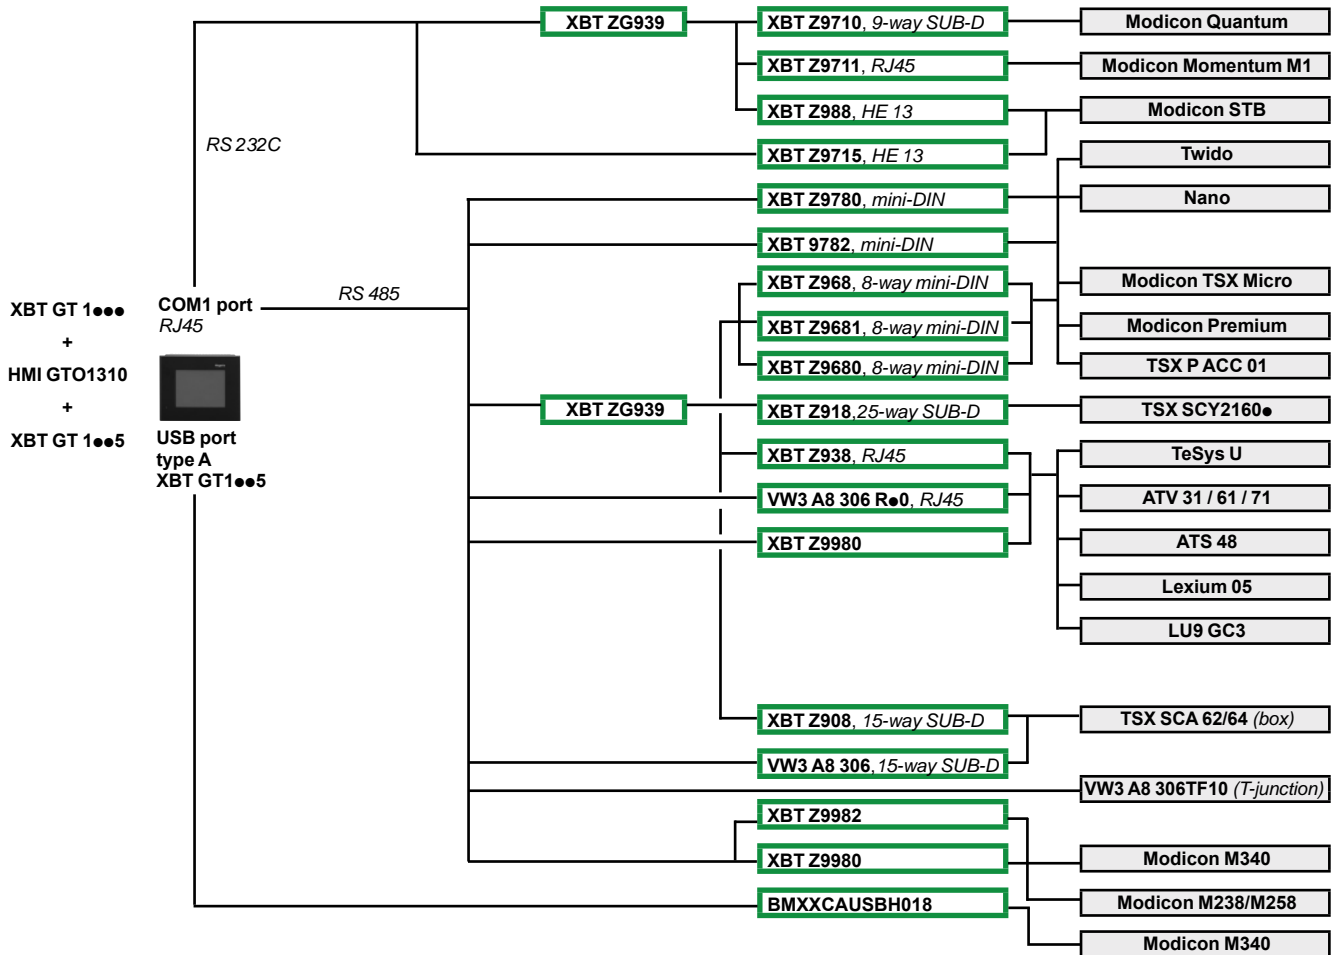

1

XBT GT2●●0/GT7340/GK●●●● terminals, HMI GTO terminals (except HMI GTO1310) and Schneider Electric products

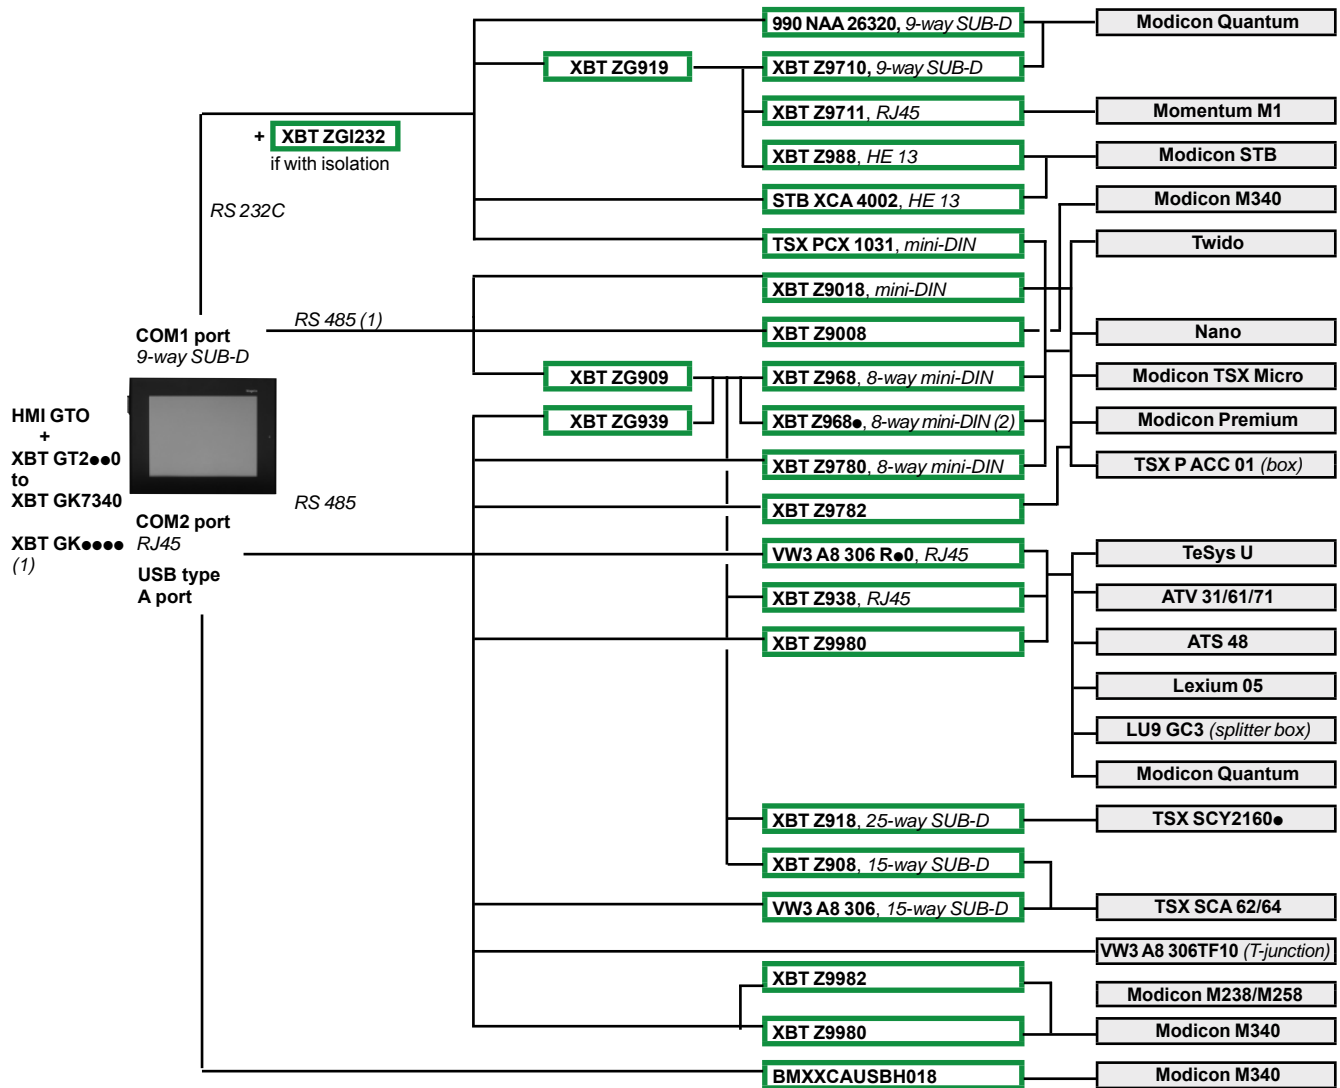

(1) RS485 not available for HMI GTO (COM1).

(2) ● defines the length:

- 0, 2.5 m (elbowed connector)


- 1, 5 m

- 6, 16 m

- 7, 20 m


- 8, 25 m

XBT GT11●5 terminals, HMI GTO1310 terminals and third party PLCs

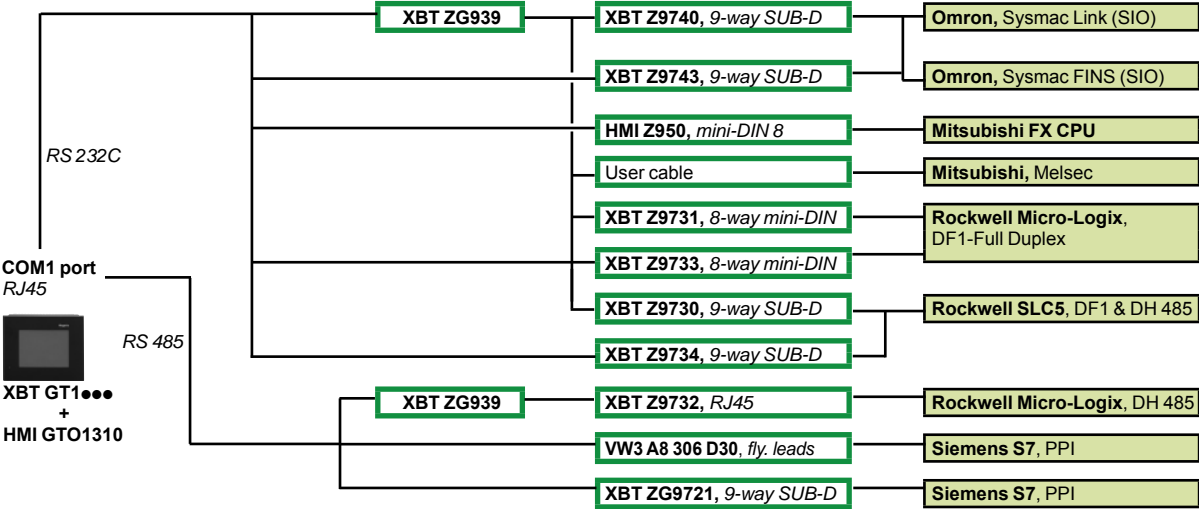

1


XBT GT2●●0/GT7340/GK●●●● terminals, HMI GTO terminals (except HMI GTO1310) and third-party PLCs

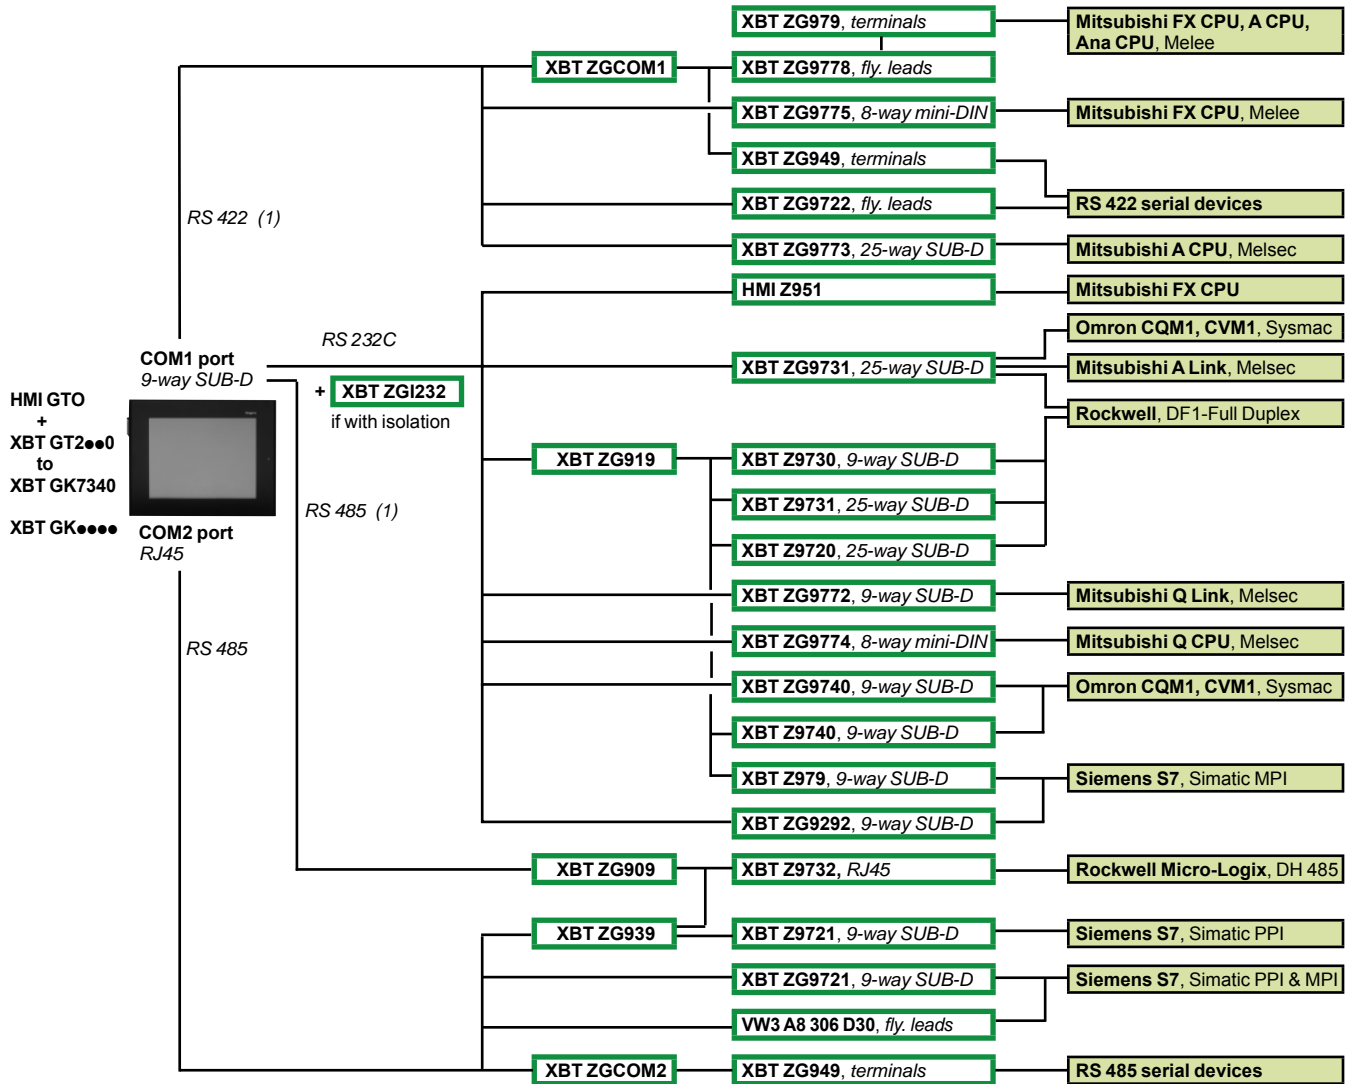

(1) RS 422 and RS 425 not available on HMI GTO (COM1).


Application transfer from XBT GT terminals to PC

XBT GT1100/1130

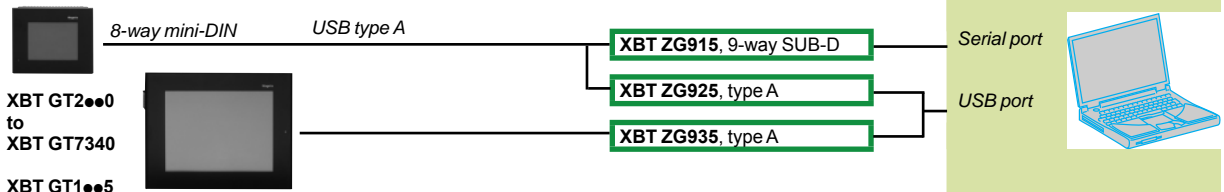

Application transfer from HMI GTO terminals to PC

HMI GTO



Equivalent product table between XBT GT terminals and HMI GTO terminals

Old range XBT GT	New range HMI GTO <i>Requires Vijeo Designer ≥ V6.1</i>	Mechanical adaptor
XBT GT1100	HMI GTO1300	–
XBT GT1130	HMI GTO1310	–
XBT GT1105	HMI GTO1300	–
XBT GT1135	HMI GTO1310	–
XBT GT1335	HMI GTO1310	–
XBT GT2110	HMI GTO2300	–
XBT GT2120	HMI GTO2310	–
XBT GT2130	HMI GTO2310	–
XBT GT2220	HMI GTO2310	–
XBT GT2330	HMI GTO2310	–
XBT GT4230	HMI GTO4310	–
XBT GT4330	HMI GTO4310	–
XBT GT5230	HMI GTO5310	XBT ZGC04
XBT GT5330	HMI GTO5310	–
XBT GT6330	HMI GTO6310	–

Comments: when upgrading from the Magelis XBT range to the Magelis GTO Optimum range, the following parameters must be taken into account:

- connection to the Profibus DP and Device Net fieldbuses is not possible,
- a combined RS232/RS422 serial link is not possible with COM1,
- there is no "alarm" output or "loudspeaker" output in the current version of the Optimum range.

Signaling Units

Monolithic tower lights

Harmony® type XVGU Ø 60

Multi-color USB tower lights

1



HMI (Magelis Advanced Panels (1))

Presentation

The monolithic USB tower lights of the Harmony® XVGU range are designed to support HMI (Magelis™ Advanced Panels (1)). These new tower lights with multi-color LEDs are unique and simple-to-use as the states and patterns are directly set and modified in the HMI application.

The XVGU tower lights provide long distance indication of the operating status or sequences of a machine or installation, both visually by means of illuminated signaling units with 360° visibility, and audibly by means of a buzzer.

- The tower light comes with a pre-assembled USB cable for simple wiring and easy integration with the Magelis Advanced Panels (1) (2).
- The tower light settings are selected from the Set screen of the HMI application at the time of integration.
 - The multi-color LEDs on all the three levels can be set to many possible color combinations (red, orange, green or blue) for sophisticated signaling.
 - The 2-tone buzzer volume and alarm type (4 pre-recorded types) can be set easily.
- The tower lights are easy to order as many customized configurations can be made from a single part number.
- The range involves Ø 60 mm/2.36 in. products and is therefore ideal for use in many activity sectors (textiles, packaging, baggage handling). It is also ideal for use with metal tools, plastic extrusion machines and assembly lines. This range is only for indoor applications.

XVGU tower lights are supplied:

- with 3 multi-color LEDs and a clear lens,
- with a 2-tone buzzer,
- with pre-assembled USB cable for easy connection (2),
- with USB cable clamp for firm connection,
- fitted with one of the following mounting options:
 - direct base mounting (IP 42),
 - aluminium tube mounting and fixing plate (IP 42).

(1) Please refer to "USB tower lights compatible with Magelis Advanced Panels" table on page 1/79.

(2) For extension, use either the Schneider Electric USB cable (BMXXCAUSBH018) or a third-party USB Type A/mini B cable of maximum length 4 m/13.12 ft.

Signaling Units


Monolithic tower lights

Harmony® type XVGU Ø 60

Multi-color USB tower lights

Presentation (continued)

The following illustrates the integration of XVGU tower lights with the Magelis™ Advanced Panels (1).

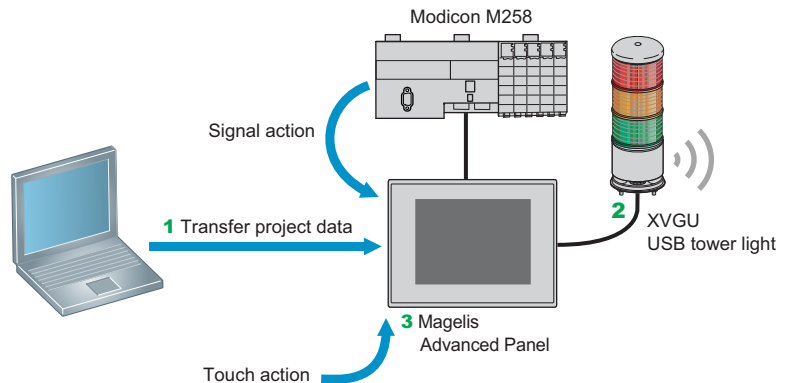

- 1 The HMI application is created on a computer using the Vijeo designer HMI editor software (V6.1 Service pack 1 or higher). It is then downloaded to the Magelis Advanced Panel (1) via a USB cable for setting situation, color, and buzzer actions.
- 2 The tower light's pre-assembled USB cable is connected to the Magelis terminal for power supply and signal transmission (2).
- 3 The LED colors, flashing patterns, and buzzer tones are set and modified in the HMI Set screen.

Illuminated signaling

The light source consists of three multi-color LEDs (red, orange, green or blue) completed with a clear lens to provide an aesthetic look and reliable signaling (clear lenses help to avoid color reflectance in bright environments). When LEDs are not powered, the tower lights appear translucent. The LED colors can be set to many possible combinations of red, orange, green, and blue.

Audible signaling

The tower light is supplied with a 2-tone buzzer audible signaling unit, the volume of which can be adjusted up to 85 dB. This audible unit with 4 pre-recorded alarm types is located in the base of the tower light.

Environment

The XVGU tower lights are CE certified and conform to EN 61000-6-2 and EN 61000-6-4 standards.

Cabling

XVGU tower lights have pre-assembled USB cable with "Type A female" connector to attach to any standard USB mini B cable. A clamp is provided to prevent unintended removal or disconnection of the tower light from the Magelis Advanced Panel.

(1) Please refer to "USB tower lights compatible with Magelis Advanced Panels" table on page 1/79.

(2) For extension, use either the Schneider Electric USB cable (BMXXCAUSBH018) or a third-party USB Type A/mini B cable of maximum length 4 m/13.12 ft.


Signaling Units

Monolithic tower lights

Harmony® type XVGU Ø 60

Multi-color USB tower lights

1

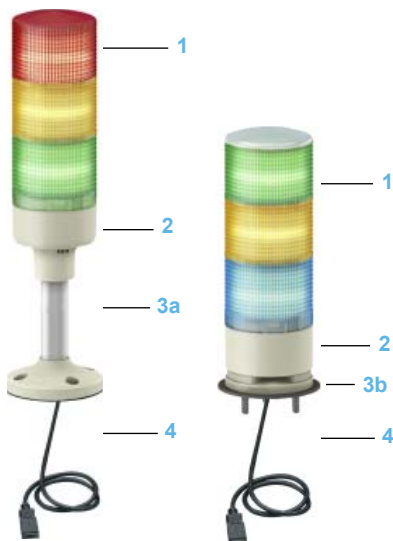

Description

XVGU monolithic tower lights comprise an assembly of:

- 1 Three layers of multi-color illuminated signaling units (red, orange, green, or blue) which are set in the HMI application. Each XVGU tower light is equipped with multi-color LEDs and a clear lens molded from a single piece of clear plastic. The colors are visible only when the LEDs are supplied with power (5 V DC).
- 2 A base unit integrating the buzzer.
- 3 A fixing base for mounting on a horizontal support:
 - 3a a fixing base, comprising a 100 mm/3.94 in. aluminium support tube mounted on a fixing plate,
 - 3b a fixing base fitted with 3 screws for direct mounting.
- 4 A USB cable with "Type A female" connector, the projecting length being 300 mm/11.81 in. for tube mounting and 400 mm/15.75 in. for direct mounting models (1).

Pre-assembled tower lights 5 V, Ø 60 mm/2.36 in.

Description	Light source (included)	Degree of protection	Signaling colors	Reference	Weight
With 100 mm/3.94 in. aluminium tube mounting and fixing plate					
With buzzer	Multi-color LED for various states and patterns	IP 42	Red/Orange/Green/Blue	XVGU3SHAV	0.300 kg/ 0.661 lb

With direct base mounting

With buzzer	Multi-color LED for various states and patterns	IP 42	Red/Orange/Green/Blue	XVGU3SWV	0.300 kg/ 0.661 lb
--------------------	---	-------	-----------------------	-----------------	-----------------------

Accessories

Description	Utilization	Length	Reference	Weight
Connection cable from PC to the terminal (USB Type A/mini B)	Cable for transferring screen data from a PC (USB Type A) to a HMI (USB Type mini B)	1.8 m/ 5.91 ft	BMXXCAUSBH018	0.065 kg/ 0.143 lb

Note: Signaling colors: Red, Orange, Green, and Blue. The colors with any of these combination is set easily in the HMI application.

(1) For extension, use either the Schneider Electric USB cable (BMXXCAUSBH018) or a third-party USB Type A/mini B cable of maximum length 4 m/13.12 ft.

Signaling Units

Monolithic tower lights

Harmony® type XVGU Ø 60

Multi-color USB tower lights



USB tower lights compatible with Magelis™ Advanced Panels and HMI Controllers

Type of tower light 1	Type of Advanced Panels or HMI Controllers	Description	Reference 2 (1)
XVGU3SWV XVGU3SHAV	Monochrome touch screen Standard Advanced Panels	Optimum, 3.8" QVGA screen/Orange or red/STN	XBTGT1105
		Optimum, 3.8" QVGA screen/Orange or red/STN	XBTGT1135
		Optimum, 5.7" QVGA screen/Blue mode/STN	XBTGT2110
		Multifunction, 5.7" QVGA screen/Black and White/STN	XBTGT2120
		Multifunction, 5.7" QVGA screen/Blue mode/STN	XBTGT2130
	Color touch screen Standard Advanced Panels	Optimum, 3.8" QVGA screen/TFT	XBTGT1335
		Multifunction, 5.7" QVGA screen/STN	XBTGT2220
		Multifunction, 5.7" QVGA screen/TFT	XBTGT2330
		Multifunction, 5.7" VGA screen/TFT	XBTGT2430
		Multifunction, 5.7" QVGA screen/High brightness TFT	XBTGT2930
		Multifunction, 7.5" VGA screen/STN	XBTGT4230
		Multifunction, 7.5" VGA screen/TFT	XBTGT4330
		Multifunction, 7.5" VGA screen/TFT	XBTGT4340
		Multifunction, 10.4" VGA screen/STN	XBTGT5230
		Multifunction, 10.4" VGA screen/TFT	XBTGT5330
		Multifunction, 10.4" VGA screen/TFT	XBTGT5340
		Multifunction, 10.4" SVGA screen/TFT	XBTGT5430
		Multifunction, 12.1" SVGA screen/TFT	XBTGT6330
		Multifunction, 12.1" SVGA screen/TFT	XBTGT6340
		Multifunction, 15" XGA screen/TFT	XBTGT7340
	Keypad/touch screen Standard Advanced Panels	Multifunction, 5.7" screen/Black and white/STN	XBTGK2120
		Multifunction, 5.7" screen/Color/TFT	XBTGK2330
		Multifunction, 10.4" screen/Color/TFT	XBTGK5330
	Portable touch screen Standard Advanced Panels	Multifunction, 5.7" screen/Color/TFT	XBTGH2460
		Multifunction, 5.7" screen/Color/TFT (without Emergency stop Pushbutton)	XBTGH2460B
	Junction box	Junction Box for XBTGH2 (without Fieldbus)	XBTZGJBOX
	Optimum Advanced Panels	3.5" QVGA screen/TFT	HMIGTO1300
		3.5" QVGA screen/TFT	HMIGTO1310
		5.7" QVGA screen/TFT	HMIGTO2300
		5.7" QVGA screen/TFT	HMIGTO2310
		5.7" QVGA screen/Stainless steel	HMIGTO2315
		7.0" WVGA screen/TFT	HMIGTO3510
		7.5" VGA screen/TFT	HMIGTO4310
		10.4" VGA screen/TFT	HMIGTO5310
		10.4" VGA screen/Stainless steel	HMIGTO5315
		12.1" SVGA screen/TFT	HMIGTO6310
	HMI Controllers	3.8" screen/Orange or Red/STN	XBTGC1100U
		3.8" screen/Orange or Red/STN	XBTGC1100T
		5.7" screen/Black and white/STN	XBTGC2120U
		5.7" screen/Black and white/STN	XBTGC2120T
		5.7" screen/Color/STN	XBTGC2230U
		5.7" screen/Color/STN	XBTGC2230T

Note: For more information on Magelis Advanced Panels and HMI Controllers, see pages 1/28 and 2/2.

(1) The minimum required Vijeo designer software version is Vjd 6.1 Service pack 1.

HMI Controllers Magelis

Selection guide page 2/2

■ **Presentation** page 2/4

■ **Magelis XBT GC HMI Controller**

□ Magelis XBT GC HMI Controller: 3.8", 5.7" page 2/10

□ Separate parts page 2/10

□ Discrete I/O extension modules page 2/11

□ Analog I/O extension modules page 2/12

□ Modicon Telefast® pre-wired system for XBT GC page 2/14

□ CANopen bus master module for XBT GC page 2/18

■ **Magelis XBT GT/GK Advanced Panels with control function**

□ CANopen bus master module for XBT GT/GK page 2/20

□ Magelis XBT GT Advanced Panels: 5.7", 7.5", 10.4", 12.1", 15" page 2/22

□ Magelis XBT GK Advanced Panels: 5.1", 10.4" page 2/23

■ **Wiring system CANopen bus** page 2/24

Software platform

■ **SoMachine software suite** page 2/26

HMI Controllers

Magelis™ XBT GC HMI Controllers

Magelis™ XBT GT, XBT GK Standard Advanced
Panels + control function

2

Applications		Display of text messages, graphic objects and mimics Control and configuration of data IEC 1131-2 control function		
Terminal type		HMI Controllers		
				
Display	Type	Back-lit monochrome (amber or red mode) STN LCD (320 x 240 pixels)	Backlit monochrome STN LCD (320 x 240 pixels)	Colour STN LCD (320 x 240 pixels)
	Capacity	3.8" (monochrome)	5.7" (monochrome)	5.7" (colour)
Data entry		Via touch screen		
		–		
		–		
		–		
		–		
Memory capacity	Application	16 MB EPROM Flash		
	Extension	–		
Functions	Maximum number of pages and maximum number of instructions	Limited by internal Flash EPROM memory capacity		
	Variables per page	Unlimited (8000 variables max.)		
	Programmed logic	5 languages according to IEC 1131-2 (LD, ST, FBD, SFC, IL)		
	Counting/positioning	4 x 100 kHz fast counter inputs/4 x 65 kHz pulse train outputs		
	Control (PID)	Yes		
	Representation of variables	Alphanumeric, bitmap, bargraph, gauge, tank, tank level indicator, curves, polygon, button, indicator		
	Recipes	32 groups of 64 recipes comprising 1024 ingredients max.		
	Curves	Yes, with log		
	Alarm logs	Yes		
	Real-time clock	Built-in		
I/O	Integrated	12 x 24 V $\overline{\text{---}}$ digital inputs 6 sink or source transistor outputs (1)	16 x 24 V $\overline{\text{---}}$ digital inputs 16 sink or source transistor outputs (1)	
	I/O modular extensions	Two M238 I/O modules max.	Three M238 I/O modules max.	
Communication	Downloadable protocols	–	Uni-TE, Modbus, Modbus TCP/IP (1) and for PLC brands: Mitsubishi, Omron, Allen-Bradley and Siemens	
	Asynchronous serial link	–	RS 232C/RS 422/485 (COM1)	
	USB ports	1		
	Buses and networks	1 CANopen master with optional module (XBT ZGC CAN)		
	Printer link	–	Ethernet TCP/IP (10BASE-T/100 BASE-TX)	
		USB port for parallel printer		
Design software		SoMachine with Windows XP Professional and Windows 7 Professional 32/64-bit, see page 2/29		
Operating system		Magelis (131 MHz RISC CPU)		
Terminal type		XBT GC 1100 T/U	XBT GC 2120 T/U	XBT GC 2230 T/U
Pages		2/10	2/10	2/10

(1) Depending on model



More technical information on www.schneider-electric.com

Display of text messages, graphic objects and mimics
Control and configuration of data

IEC 1131-2 control function

Touch screen Standard Advanced Panels + control function

Standard Advanced Panels with keypad + control function



Back-lit monochrome or colour STN LCD or colour TFT LCD
(320 x 240 pixels to 1024 x 768 pixels)
(1)

5.7" (monochrome or colour)
7.5", 10.4", 12.1" or 15" (colour)
(1)

Monochrome STN LCD or colour TFT LCD
(320 x 240 pixels or 640 x 480 pixels)
(1)

5.7" (monochrome or colour) or 10.4" (colour)
(1)

Via touch screen

—
—
—
—

Via keypad and/or touch screen (configurable) and/or by industrial pointer

10 or 12 (1)
14 or 18 (1)
8
12

16 MB Flash EPROM or 32 MB Flash EPROM (1)

By 128 MB to 4 GB CF card (1)

Limited by internal Flash EPROM memory or by CF memory card capacity

Unlimited (8000 variables max.)

5 languages according to IEC 1131-2 (LD, ST, FBD, SFC, IL)

—

Yes

Alphanumeric, bitmap, bargraph, gauge, tank, tank level indicator, curves, polygon, button, indicator

32 groups of 64 recipes comprising 1024 ingredients max.

Yes, with log

Yes

Built-in

—

—

Uni-TE, Modbus, Modbus TCP/IP (1) and for PLC brands: Mitsubishi, Omron, Allen-Bradley and Siemens

RS 232C/RS 422/485 (COM1) and RS 485 (COM2)

1 or 2 (1)

1 CANopen master with external module (XBT ZG CANM) which is mandatory for the control function

Ethernet TCP/IP (10BASE-T/100BASE-TX) (1)

USB port for parallel printer and RS 232C serial link (COM 1)

SoMachine with Windows XP Professional and Windows 7 Professional 32/64-bit,
see page 2/29)

Magelis
(131 MHz RISC or 266 MHz RISC CPU) (1)

Magelis
(133 MHz RISC CPU)

XBT GT 2●/4●/5●/63/73 + XBT ZG CANM

XBT GK 2●/53 + XBT ZG CANM

1/59 and 2/20

1/60 and 2/20



More technical information on www.schneider-electric.com

HMI Controllers


Magelis™ XBT GC HMI Controllers

Magelis™ XBT GT/GK Standard Advanced Panels with control

2



Magelis XBT GC HMI Controllers

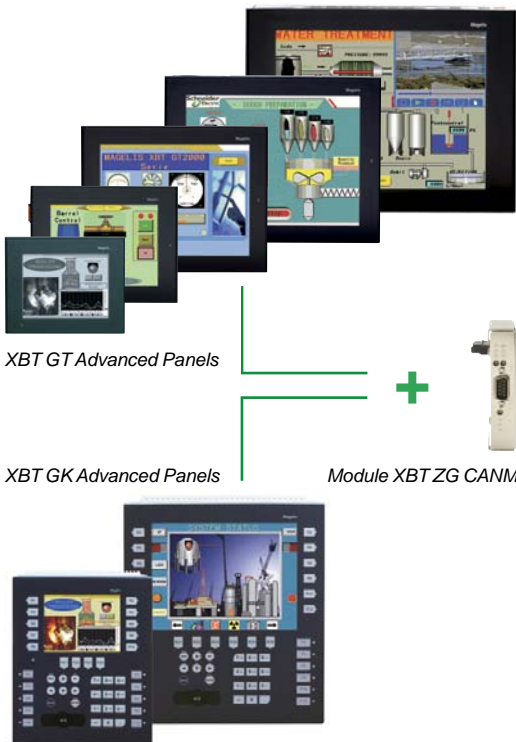

HMI function: Magelis XBT GT/GK Advanced Panels
+
Control function: XBT ZG CANM CANopen master module

Presentation

Magelis HMI Controllers are part of Schneider's Flexible Machine Control concept, a key element in MachineStruxure™.

The Magelis HMI Controller offer brings together Human Machine Interface and control functions within in a single product. This reduces the amount of equipment required and the associated costs throughout the life cycle of the machine.

This offer features two product ranges:

- The compact range: Magelis XBT GC HMI Controllers
- The modular range: Magelis XBT GT/GK Standard Advanced Panels + XBT ZG CANM CANopen module

Magelis XBT GC HMI Controllers (compact range)

The compact design of Magelis XBT GC HMI Controllers optimizes setup.

This range comprises six touch screen terminals, with the following, depending on the model:

- 3.8" monochrome screen, 12 integrated inputs/6 integrated outputs (sink or source)
- 5.7" monochrome or colour screen, 16 integrated inputs/16 integrated outputs (sink or source)
- A wide choice of communication interfaces (USB, serial link, CANopen and Ethernet)

In order to adapt easily to different configurations, it is possible to add digital or analog I/O expansion modules at the rear of the Controller.

Magelis XBT GT/GK Standard Advanced Panels + XBT ZG CANM CANopen module (modular range)

This range is made up of the complete Magelis XBT GT or Magelis XBT GK Standard Advanced Panels offers combined with a control part using the XBT ZG CANM CANopen module. During operation, this module controls the I/O and the peripherals distributed via the CANopen bus.

The combination with Magelis XBT GT or Magelis XBT GK Standard Advanced Panels gives a wide choice of screen sizes and types of data entry, depending on the model:

- 17 XBT GT touch screen terminals:
 - 5.7" monochrome or colour screens
 - 7.5", 10.4", 12.1" and 15" colour screens
- 3 XBT GK terminals with keypad and/or touch screen:
 - 5.7" monochrome or colour screens
 - 10.4" colour screens

This combination also offers numerous Standard Advanced functions such as video, data management (sharing of data, log), etc.

Operation

With their fast, multitasking processors, all the HMI Controllers combine HMI and control functions and share the same screen and communication features and dimensions.

The internal memory can be freely used by both the HMI function and the control function.

Processing is split 75% on the HMI part and 25% on the control part. The processing can be configured for 3 tasks, including 1 master task.

XBT GC HMI Controllers also share the same I/O modules, the same Telefast pre-wired system and the same peripherals on the CANopen bus as the M238 logic controller.

HMI Controllers

Magelis™ XBT GC HMI Controllers

Magelis™ XBT GT/GK Standard Advanced Panels with control



SoMachine



Vijeo Designer
(included in SoMachine)


Configuration

Magelis XBT GC HMI Controllers and Magelis XBT GT/GK Standard Advanced Panels are configured using Schneider Electric's unique machine automation software, SoMachine.

This software, combining both HMI and control functions, is based on Vijeo Designer software in the Windows XP Professional and Windows 7 Professional 32/64-bit environment.

SoMachine software boasts an advanced user interface with many configurable windows, enabling unique projects to be developed quickly and easily. See page 2/26.

Communication

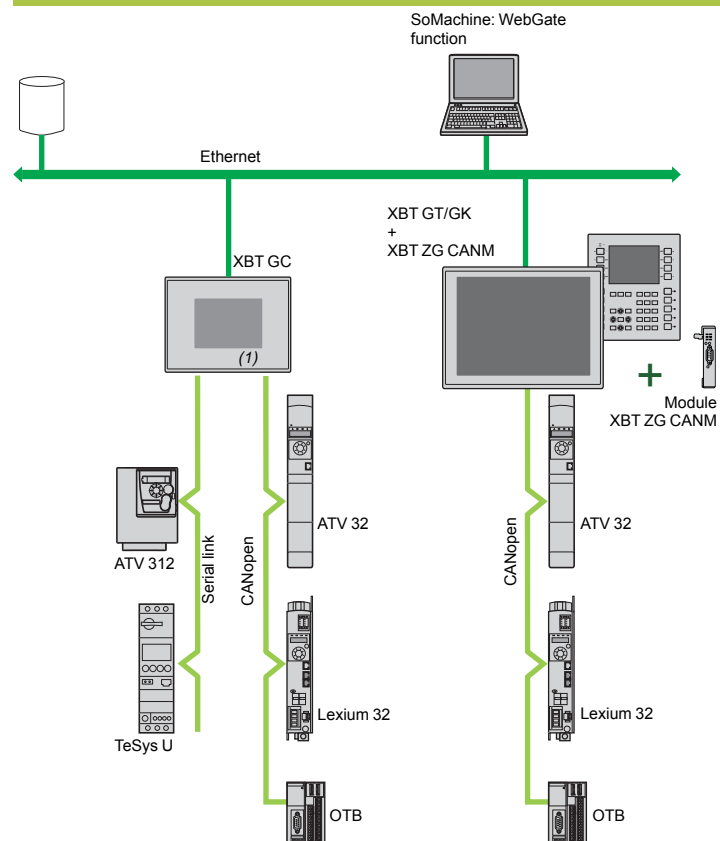

(1) With XBT ZGC CAN CANopen master module

Examples of communication architectures

Depending on the model, Magelis HMI Controllers and Magelis XBT GT/GK Standard Advanced Panels communicate with automation devices via 1 or 2 integrated serial links using the following communication protocols:

- Schneider Electric (Uni-TE, Modbus)
- Third-party: Mitsubishi Electric, Omron, Allen-Bradley and Siemens

Depending on the model, they can be connected to Ethernet TCP/IP networks with the Modbus TCP protocol or a third-party protocol, and can be used as the CANopen master to control all the peripherals which can be connected on this bus.

Functions

Magelis HMI Controllers are part of Schneider's Flexible Machine Control concept, a key element in MachineStruxure™.

Magelis XBT GC HMI Controllers and Magelis XBT GT/GK Standard Advanced Panels offer the following HMI functions:

- Display of animated mimics with 8 types of animation (pressing the touch panel, colour changes, filling, movement, rotation, size, visibility and value display)
- Control, modification of numeric and alphanumeric values
- Display of current date and time
- Real-time curves and trend curves with log
- Alarm display, alarm log and management of alarm groups
- Multi-window management
- Page calls initiated by the operator
- Multilingual application management (10 languages simultaneously)
- Recipe management
- Data processing via Java script
- Application support and USB key external memory logs
- Management of serial printers and barcode readers

Magelis XBT GC HMI Controllers and Magelis XBT GT/GK Standard Advanced Panels ⁽¹⁾ have been designed for Transparent Ready architectures and equipment (combination of Web and Ethernet TCP/IP technologies).

With the WebGate function, it is possible to control or carry out maintenance remotely.

Magelis XBT GC HMI Controllers and Magelis XBT GT/GK Standard Advanced Panels offer the following functions for control:

- Execution of programmed logic sequences with the five IEC 1131-2 languages (LD, ST, FBD, SFC, IL)
- Management of equipment on the CANopen fieldbus

In addition to these functions, Magelis XBT GC HMI Controllers manage:


- Integrated and remote I/O on expansion modules
- Remote analog I/O on expansion modules

⁽¹⁾ Depending on model.


Operating modes for the terminals

The illustrations below show which equipment can be connected to XBT terminals based on their two operating modes.

Edit mode

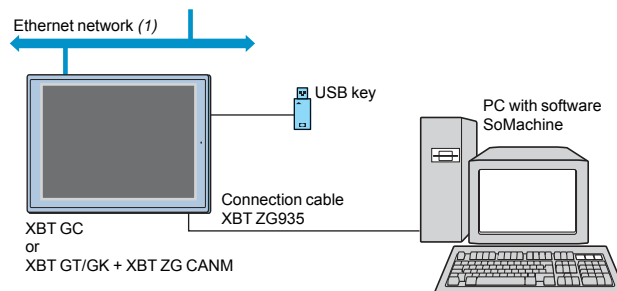

Run mode

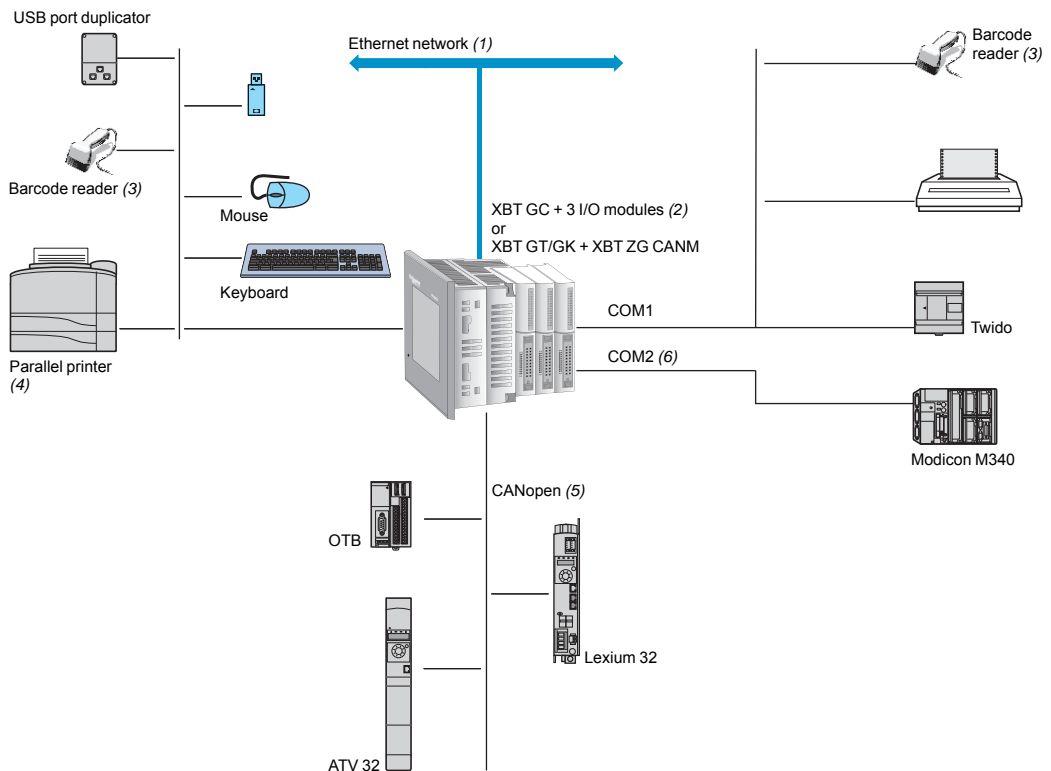


- (1) With XBT GC 2230T/U, XBT GT●●30, XBT GT●●40, XBT GK●●30
 (2) With XBT GC●●●●T/U, maximum 2/3 I/O modules according to model
 (3) Should be a DataLogic Gryphon barcode reader
 (4) Should be a Hewlett Packard printer via a USB/PIO converter
 (5) Requires:
 - for XBT GC: XBT ZGC CAN CANopen master module
 - for XBT GT/GK: XBT ZG CANM CANopen master module
 (6) With XBT GT/GK

Description

Magelis XBT GC1100T and XBT GC1100U HMI Controllers


The front panel comprises:

- 1 A touch screen for displaying mimics (3.8" amber or red mode monochrome)
- 2 A control indicator showing the terminal's operating mode



The rear panel comprises:

- 1 A removable screw terminal block for 24 V ~ power supply
 - 2 A type A USB master connector for peripheral connection and application transfer
 - 3 A removable terminal block for 12 digital inputs and 6 digital outputs
 - 4 An interface for connecting M238 logic controller I/O expansion modules
 - 5 An interface for connecting the CANopen bus master module (see page 2/19) Digital (TM2 D●●) or analog (TM2 A●●) I/O expansion module (to be ordered separately, see pages 2/11 and 2/12)
- It is possible to combine a maximum of two I/O expansion modules, depending on the module type (see page 2/13).

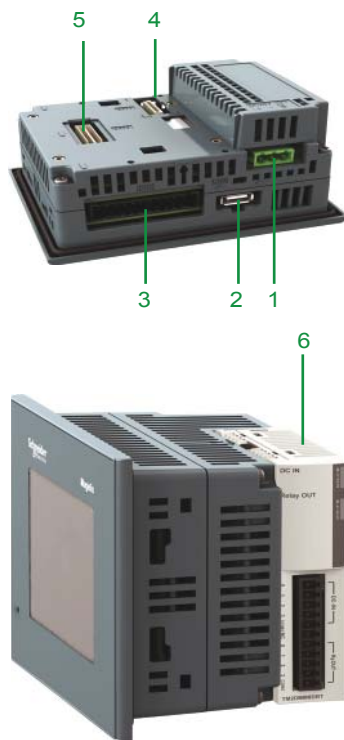


Description

Magelis XBT GC2•20 and XBT GC2•30 HMI Controllers


The front panel comprises:

- 1 A touch screen for displaying mimics (5.7" monochrome or colour)
- 2 A multicolour indicator (green, orange and red) showing the terminal's operating mode

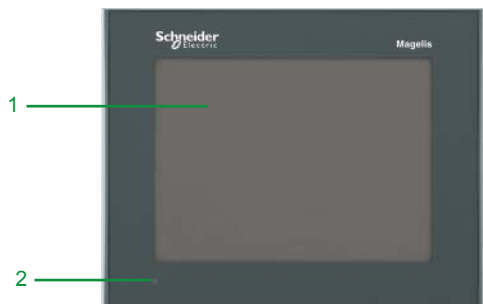


The rear panel comprises:

- 1 A removable screw terminal block for 24 V ~ power supply
 - 2 A type A USB master connector for peripheral connection and application transfer
 - 3 A 9-way male SUB-D connector for RS 232C or RS 422/485 serial link to PLCs (COM1)
 - 4 An interface for connecting the M238 logic controller I/O expansion module
 - 5 An interface for connecting the CANopen bus master module (see page 2/19)
 - 6 A removable terminal block for 16 digital inputs and 16 digital outputs
 - 7 Digital (TM2 D●●) or analog (TM2 A●●) I/O expansion module (to be ordered separately, see pages 2/11 and 2/12)
- It is possible to combine a maximum of three I/O expansion modules, depending on the module type (see page 2/13).

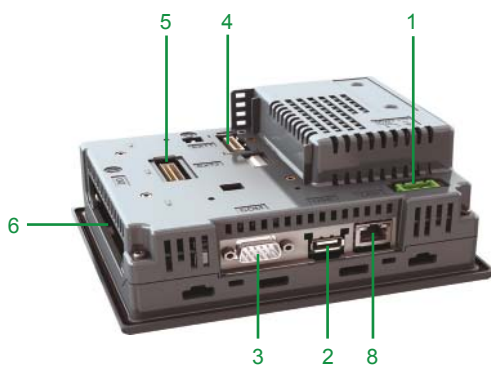

For XBT GC2230 only:

- 8 An RJ45 connector for Ethernet TCP/IP 10BASE-T/100BASE-TX link





XBT GC1100●



XBT GC2●●●●



XBT ZGUSB

Magelis XBT GC HMI Controllers ⁽¹⁾

Type of screen	No. of ports	Application memory capacity	Compact Flash memory	Integrated I/O	No. of Ethernet ports	Reference	Weight kg
3.8" screen							
STN amber or red	1 USB	16 MB	No	12 I/6 O source	-	XBT GC1100T	0.400
				12 I/6 O sink	-	XBT GC1100U	0.400
5.7" screen							
STN black and white mode	1 COM 1	16 MB	No	16 I/16 O source	-	XBT GC2120T	1.000
	1 USB			16 I/16 O sink	-	XBT GC2120U	1.000
5.7" screen							
STN colour	1 COM 1	16 MB	No	16 I/16 O source	1	XBT GC2230T	1.000
	1 USB			16 I/16 O sink	1	XBT GC2230U	1.000

Separate parts

Designation	Compatibility	Size	Reference	Weight kg
Protective sheets (5 peel-off sheets)	XBT GC 1100	—	XBT ZG60	0.200
	XBT GC2●●0	—	XBT ZG62	0.200

Designation	Description	Length	Reference	Weight kg
Remote USB port location for type A XBT terminal	Enables the USB port to be located remotely on the rear of the XBT terminal on a panel or cabinet door (Ø 21 mm fixing device)	1 m	XBT ZGUSB	—
Remote USB port location for mini type B XBT terminal		-	XBT ZGUSBB	—
XBT GC connection to CANopen master fieldbus	Connection via card on bus extension	-	XBT ZGCCAN	—
Cable for transferring application to PC	USB TTL connector	2 m	XBT ZG 935	—

Replacement parts

Designation	Used for	Reference	Weight kg
Joints d'étanchéité	XBT GC1100	XBT ZG51	0.030
	XBT GT21●0	XBT ZG52	0.030
Attache USB	XBT GC 1100	XBT ZGCLP2	—
	XBT GC 2●●0	XBT ZGCLP4	—
Mounting kit	4 clips and screws (max. tightening torque: 0,5 Nm), included with all XBT GC terminals	XBT ZG FIX	0.100
Spring clip for expansion modules on XBT GC	XBT GC2●●0 terminals	XBT ZGCHOK	0.030
Power supply connector	XBT GC1●●● / GC2●●●	XBT ZGPWS1	0.030
Direct I/O connector	XBT GC1000	XBT ZG DIO1	—
	XBT GC2000	XBT ZG DIO2	—

(1) Terminals supplied with mounting kit (screw clips), locking device for USB connectors, spring clip for expansion modules (except XBT GC 1100) and instruction sheet. The setup documentation for XBT GC terminals is supplied in electronic format with SoMachine software (see page 2/29).

HMI Controllers

Magelis™ XBT GC HMI Controllers

Digital I/O expansion modules



TM2 DDI 8DT



TM2 DDO 8● T/DRA 8RT



TM2 DDO 32●K



TM2 DDM 24DRF

Digital I/O expansion modules

Digital I/O expansion modules are mounted on the rear of XBT GC controller bases. The maximum permitted number of digital and/or analog I/O modules depends on the type of XBT GC terminal and the thickness of the modules (see combination rule on page 2/13).

Digital input modules (1)

Input voltage	No. of channels	No. of common points	Connection	Thickness mm (Type)	Reference	Weight kg
24 V $\overline{\text{---}}$ sink/source	8	1	By removable screw terminal block (provided)	23.5 (B)	TM2 DDI 8DT	0.085
	16	1	By removable screw terminal block (provided)	23.5 (B)	TM2 DDI 16DT	0.100
			By HE 10 connector	23.5 (B)	TM2 DDI 16DK (2)	0.065
	32	2	By HE 10 connector	29.7 (C)	TM2 DDI 16DK (2)	0.100
120 V \sim	8	1	By removable screw terminal block (provided)	23.5 (B)	TM2 DAI 8DT	0.081

Digital output modules (1)

Input voltage	No. of channels	No. of common points	Connection	Thickness mm (Type)	Reference	Weight kg
Transistors 24 V $\overline{\text{---}}$	8, sink 0.3 A	1	By removable screw terminal block (provided)	23.5 (B)	TM2 DDO 8UT	0.085
	8, sink 0.5 A	1	By removable screw terminal block (provided)	23.5 (B)	TM2 DDO 8TT	0.085
Transistors 24 V $\overline{\text{---}}$	16, sink 0.1 A	1	By HE 10 connector	17.6 (A)	TM2 DDO 16UK	0.070
	16, sink 0.4 A	1	By HE 10 connector	17.6 (A)	TM2 DDO 16TK (2)	0.070
	32, sink 0.1 A	2	By HE 10 connector	29.7 (C)	TM2 DDO 32UK	0.105
	32, sink 0.4 A	2	By HE 10 connector type	29.7 (C)	TM2 DDO 32TK (2)	0.105
2 A relays (lth) 230 V \sim / 30 V $\overline{\text{---}}$	8 (NO contact)	2	By removable screw terminal block (provided)	23.5 (B)	TM2 DRA 8RT	0.110
	16 (NO contact)	2	By removable screw terminal block (provided)	23.5 (B)	TM2 DRA 16RT	0.145

Digital mixed I/O modules (1)

No. of I/O	No./type of inputs	No./type of outputs	No. of common points	Connection	Thickness mm (Type)	Reference	Weight kg
8	4 I, 24 V $\overline{\text{---}}$ sink/source	4 relay O (NO contact) 2 A (lth)	Inputs: 1 common Outputs: 1 common	By removable screw terminal block (provided)	23.5 (B)	TM2 DMM 8DRT	0.095
24	16 I, 24 V $\overline{\text{---}}$ sink/source	8 relay O (NO contact) 2 A (lth)	Inputs: 1 common Outputs: 2 common	By spring terminal block	39.1 (D)	TM2 DMM 24DRF	0.140

(1) Please refer to the "Modicon M238 logic controller" catalogue.

(2) Module supports use of the Modicon Telefast ABE 7 pre-wired system.

HMI Controllers

Magelis™ XBT GC HMI Controllers

Analog I/O expansion modules

2



TM2 AMI 2LT



TM2 ARI 8LRJ



TM2 ARI 8LT

Analog I/O expansion modules

Analog I/O expansion modules are mounted on the rear of XBT GC controller bases. The maximum number of digital and/or analog I/O modules depends on the type of XBT GC terminal and the thickness of the modules (see combination rule on page 2/13).

Analog input modules (1)

Channel type	Input range	Output range	Resolution	Connected by	Thickness mm (Type)	Reference	Weight kg
2 inputs	0...10 V 4...20 mA	—	12-bit	Removable screw terminal block (provided)	23.5 (B)	TM2 AMI 2LT	0.085
	Thermocouple J, K, T	—	12-bit	Removable screw terminal block (provided)	23.5 (B)	TM2 AMI 2LT	0.085
4 inputs	0...10 V 0...20 mA 2, 3 or 4 wire Pt100/1000 Ni100/1000 temperature probe	—	12-bit	Removable screw terminal block (provided)	23.5 (B)	TM2 AMI 4LT	0.085
8 inputs	0...10 V 4...20 mA	—	10-bit	Removable screw terminal block (provided)	23.5 (B)	TM2 AMI 8LT	0.085
	2 or 3-wire Pt100/1000 temperature probe	—	12-bit	RJ11 connector	23.5 (B)	TM2 ARI 8LRJ	—
				Removable screw terminal block (provided)	23.5 (B)	TM2 ARI 8LT	—
	PTC/NTC	—	10-bit in NTC Detection of 2 thresholds in PTC	Removable screw terminal block (provided)	23.5 (B)	TM2 ARI 8LT	0.085

Analog output modules (1)

1 output	—	0...10 V 4...20 mA	12-bit	Removable screw terminal block (provided)	23.5 (B)	TM2 AMO 1HT	0.085
2 outputs	—	± 10 V	11-bit + sign	Removable screw terminal block (provided)	23.5 (B)	TM2 AVO 2HT	0.085

Analog I/O modules (1)

2 inputs and 1 output	0...10 V 4...20 mA	0...10 V 4...20 mA	12-bit	Removable screw terminal block (provided)	23.5 (B)	TM2 AMM 3HT	0.085
	Thermocouple J, K, T 2 or 3-wire Pt100 temperature probe	0...10 V 4...20 mA	12-bit	Removable screw terminal block (provided)	23.5 (B)	TM2 ALM 3LT	0.085
4 inputs and 1 output	0...10 V 4...20 mA	0...10 V 4...20 mA	12-bit	Removable screw terminal block (provided)	23.5 (B)	TM2 AMM 6HT	0.085

Separate parts

Designation	Description	Reference	Weight kg
Earthing plate	Support equipped with 10 male Faston connectors for connecting the cable shielding (via 6.35 mm Faston connectors, not included) and the functional earths (FE)	TM2 XMT GB	0.045
Mounting kit Sold in lots of 5	For plate or panel mounting of analog modules	TWD XMT 5	0.065

(1) For characteristics, please refer to the "Modicon M238 logical controller" catalogue.

HMI Controllers

Magelis™ XBT GC HMI Controllers

I/O expansion modules



XBT GC1●●● Combinations of two expansion modules

Combinations of
2 I/O expansion
modules with
XBT GC1●●●

Type (1)	Type (1)	Total thickness (mm)	
A	A	35.2	Permitted combinations
A	B	41.1	
B	B	47.0	
A	C	47.3	
B	C	53.2	
A	D	56.7	
C	C	59.4	Prohibited combinations
B	D	62.6	
C	D	68.8	
D	D	78.2	

XBT GC2●●● Combinations of two expansion modules

Combinations of
2 I/O expansion
modules with
XBT GC2●●●

Type (1)	Type (1)	Total thickness (mm)	
A	A	35.2	Permitted combinations
A	B	41.1	
B	B	47.0	
A	C	47.3	
B	C	53.2	
A	D	56.7	
C	C	59.4	Prohibited combinations
B	D	62.6	
C	D	68.8	
D	D	78.2	

XBT GC2●●● Combinations of three expansion modules

Combinations of
3 I/O expansion
modules with
XBT GC2●●●

Type (1)	Type (1)	Type (1)	Total thickness (mm)	
A	A	A	52.8	Permitted combinations with hook (2)
A	A	B	58.7	
A	B	B	64.6	
B	B	B	70.5	
All other combinations			–	Prohibited

(1) For digital (TM2 D●●) and analog (TM2 A●●) I/O expansion module types, see pages 2/11 and 2/12:

- Type A: thickness 17.6 mm
- Type B: thickness 23.5 mm
- Type C: thickness 29.7 mm
- Type D: thickness 39.1 mm


(2) Hook included with product

HMI Controllers

Modicon Telefast® pre-wired system
for Magelis™ XBT GC HMI Controllers

Connection sub-bases for digital I/O (integrated or on expansion modules)

Presentation

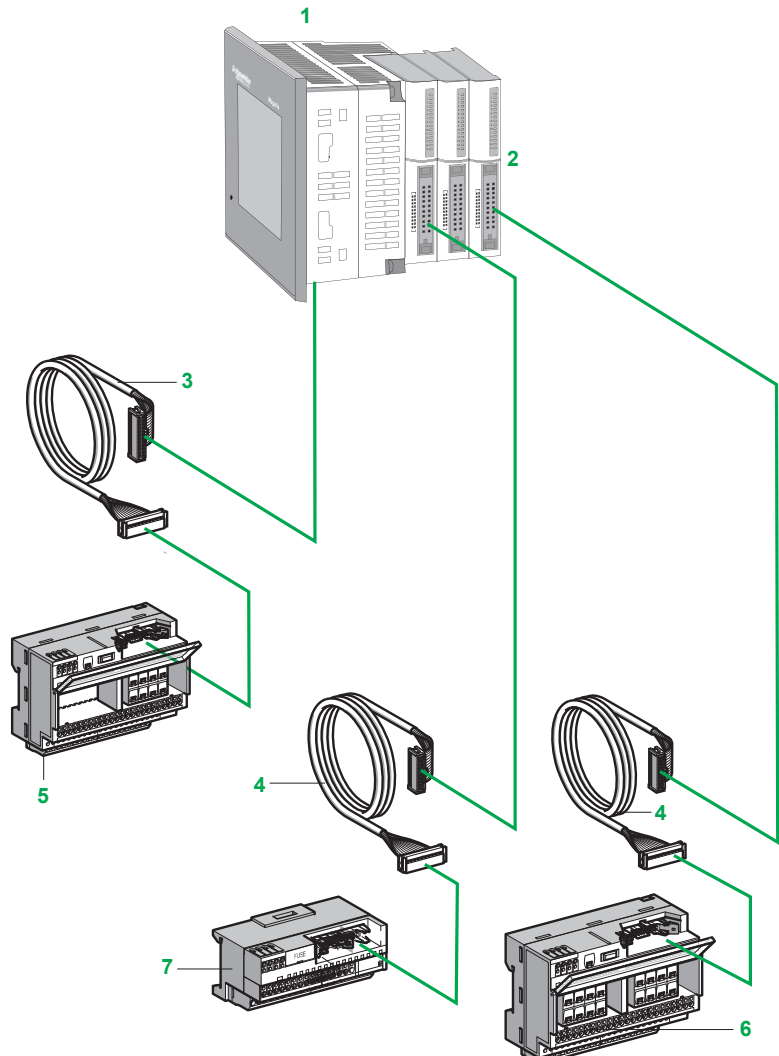

1 XBT GC equipped with 22 or 38-way direct I/O connectors. The modularity options offered have 18 or 32 I/O.

2 Digital I/O expansion modules equipped with 20-way HE10 connectors. The modularity options offered have 16 or 32 I/O.

3 2 m AWG 28/0.08 mm² cordsets, depending on the model:

- For XBT GC 1100T/U: XBT ZG ABE1 preassembled cordset with a 26-way HE 10 connector and a 22-way Direct I/O-XBT GC connector at each end
- For XBT GC 2...T/U: XBT ZG ABE2 preassembled cordset with two 20-way HE10 connectors and a 38-way Direct I/O-XBT GC connector

4 ABF T20E...0 preassembled cordset with a 20-way HE 10 connector at each end, available in 0.5, 1, 2 and 3 m lengths (AWG 28/0.08 mm²)

5 Depending on model:

- For XBT GC 1100T: ABE 7B20MPN2... or ABE 7B20MRM20 20-channel sub-base for the bases
- For XBT GC 2...T: ABE 7E16EPN20 or ABE 7E16SPN2... 16-channel sub-base

6 ABE 7E16SPN22 or ABE 7E16SRM20 16-channel sub-base for digital outputs integrated or on expansion modules

7 ABE 7E16EPN20 or ABE 7E16SPN20 16-channel sub-base for digital inputs or outputs integrated or on expansion modules

HMI Controllers

Modicon Telefast® pre-wired system
for Magelis™ XBT GC HMI Controllers

Connection sub-bases for digital I/O (integrated or on expansion modules)

Combinations involving modular bases and I/O expansion modules						
Integrated in Twido programmable controllers	XBT GC				Digital I/O expansion modules	
	Integrated digital I/O				Inputs	Outputs (source)
	XBT GC 1100T		XBT GC 2●●●T		TM2 DDI 16DK (16 I) TM2 DDI 32DK (32 I)	TM2 DDO 16TK (16 O) TM2 DDO 32TK (32 O)
	12 I	6 O source	16 I	16 O source		
Connection block types	Direct I/O, 22-way		Direct I/O, 38-way		HE 10, 20-way	
Connection to XBT GC programmable HMI Controller	XBT ZG ABE1		XBT ZG ABE2		ABF T20E●●0 (HE 10, 20-way)	
Passive connection sub-bases						
20-channel	ABE 7B20MPN2●		(1)			
16-channel	ABE 7E16EPN20					
	ABE 7E16SPN2●					
Output adaptor sub-bases						
20-channel	ABE 7B20MRM20		(2)			
16-channel	ABE 7E16SRM20					

 Compatible

 Incompatible

Note: Telefast cables and modules are not compatible with XBT GC units with sink outputs (U suffix).

(1) 6 channels used for 8 available

(2) 6 channels used for 8 available with 2 transistor outputs and 4 relay outputs

HMI Controllers

Modicon Telefast® pre-wired system
for Magelis™ XBT GC HMI Controllers
Connection sub-bases for digital I/O (integrated or on
expansion modules)



ABE 7B20MPN20



ABE 7E16EPN20



ABE 7E16SRM20

References

For XBT GC 1100T bases

Number of I/O	No./ type of inputs	No./ type of outputs	Compatibility	LED per chnnl	Fuse	Reference	Weight kg
20	12, sink 24 V ---	6, sink 24 V ---	XBT GC1100T	No	No	ABE 7B20MPN20	0.430
				Yes	Yes	ABE 7B20MPN22	0.430
	12, sink 24 V ---	2, source 24 V ---, 2 A and 4, relay	XBT GC1100T	No	No	ABE 7B20MRM20	0.430

For expansion modules or XBT GC 2●● bases

Number of inputs	Input type	Compatibility	LED per chnnl	Fuse	Reference	Weight kg
16	Sink 24V ---	TM2 DDI16DK/ DDI32K and XBT GC2●●T	No	No	ABE 7E16EPN20	0.430
Number of outputs	Output type	Compatibility	LED per chnnl	Fuse	Reference	Weight kg
16	Source 24 V ---	TM2 DDO16TK/ DDO32TK and XBT GC2●●T	No	No	ABE 7E16SPN20	0.450
			Yes	Yes	ABE 7E16SPN22	0.450
	Relay 24 V ---, 250 V~, 3 A		No	No	ABE 7E16SRM20	0.430

Connection cables for XBT GC

Type of signal	Compatibility	Connection type	Gauge Cross-sect.	Length (1)	Reference	Weight kg
		XBT GC side	Telefast side			
Digital I/O	XBT GC 1100T	Direct I/O 22-way	HE 10 26-way	AWG 28 0.08 mm²	2.0 m	XBT ZG ABE1 0.180
	XBT GC 2●●0T	Direct I/O 38-way	2 x HE 10 20-way		2.0 m	XBT ZG ABE2 0.180
	TM2 DDI16DK/ DDI32DK/ DDO16TK/ DDO32TK	HE 10 20-way	HE 10 20-way	AWG 28 0.08 mm²	0.5 m 1 m 2 m	ABF T20E050 0.060 ABF T20E100 0.080 ABF T20E200 0.140

Accessories

Designation	Number of shunted terminals	Characteristics	Order in multiples of	Unit reference	Weight kg
Optional snap-on terminal blocks	20	—	5	ABE 7BV20	0.060
	12+8	—	5	ABE 7BV20TB	0.060
Quick-blow fuses 5 x 20, 250 V, UL	—	0.125 A	10	ABE 7FU012	0.010
		0.315 A	10	ABE 7FU030	0.010
		1 A	10	ABE 7FU100	0.010
		2 A	10	ABE 7FU200	0.010

(1) For cable lengths > 2 m, please contact our Customer Care Centre.

HMI Controllers


Modicon Telefast® pre-wired system
for Magelis™ XBT GC HMI Controllers

Connection sub-bases for digital I/O (integrated or on
expansion modules)


References (continued)							
Separate parts							
Designation	Type	Compatibility		Reference	Weight kg		
Connectors Sold in lots of 5	HE 10 female 26-way	TWD LMDA20DTK/ LMDA40DTK		TWD FCN2K26	—		
	HE 10 female 20-way	TM2 DDI16DK/ DDI32DK/ DDO16TK/ DDO32TK		TWD FCN2K20	—		
Screw terminals Sold in lots of 5	10-way	TM2 DDI●DT/DAI8DT/ DDO8●T/DRA●RT		TWD FTB2T10	—		
	11-way	TM2 DMM8DRT/ AMI●●T/ARI8HT		TWD FTB2T11	—		
Designation	Compatibility	Connection type		Gauge/ Cross-sect.	Length	Reference	Weight kg
		Twido side	Other end				
Cables for digital I/O	TM2 DDI16DK/ DDI32DK/ DDO16TK/ DDO32TK	HE 10 20-way	Flying leads	AWG 22 0.035 mm ²	3 m	TWD FCW30K	0.405
					5 m	TWD FCW50K	0.670
Rolled ribbon cable	20 conductors	—	—	AWG 28 0.08 mm ²	20 m	ABF C20R200	1.310



XBT GC + XBT ZGC CAN



XBT ZGC CAN



Presentation

The **XBT ZGC CAN** module provides the CANopen bus master function for Magelis **XBT GC** HMI Controllers.

SoMachine software is used to configure the CANopen machine bus for the Magelis XBT GC HMI Controllers (see page 2/26).

The various services on offer include:

- For Schneider Electric slaves such as ATV 312/61/71 variable speed drives and Lexium 32 servo drives one or more profiles are supplied for configuring the slave according to a predefined mode.
The use of profiles means that the user has a defined operating mode without having to configure it.
- For third-party slaves:
 - The user can choose from an editable list by simply importing an EDS (Electronic Data Sheet) description file.
 - The slave can be positioned on the bus with definition of the slave number, speed, monitoring, etc.
 - The user can select variables from the list of variables managed by the slave.
 - Variables can be linked to exchange data.
 - Exchange data can be symbolized.

Description

The **XBT ZGC CAN** CANopen master bus module features:

- 1 3 LEDs (PWR, RUN and ERR) providing power supply and module operation status information
- 2 A 9-way male SUB-D connector for the CANopen bus
- 3 A connector for the **XBT GC** HMI Controller

Reference

Description	Reference	Weight kg
CANopen bus master module for Magelis XBT GC HMI Controller Conformity class M10	XBT ZGC CAN	0.100


HMI Controllers

CANopen bus

CANopen master bus module for Magelis™

HMI Controllers XBT GC

Example architecture

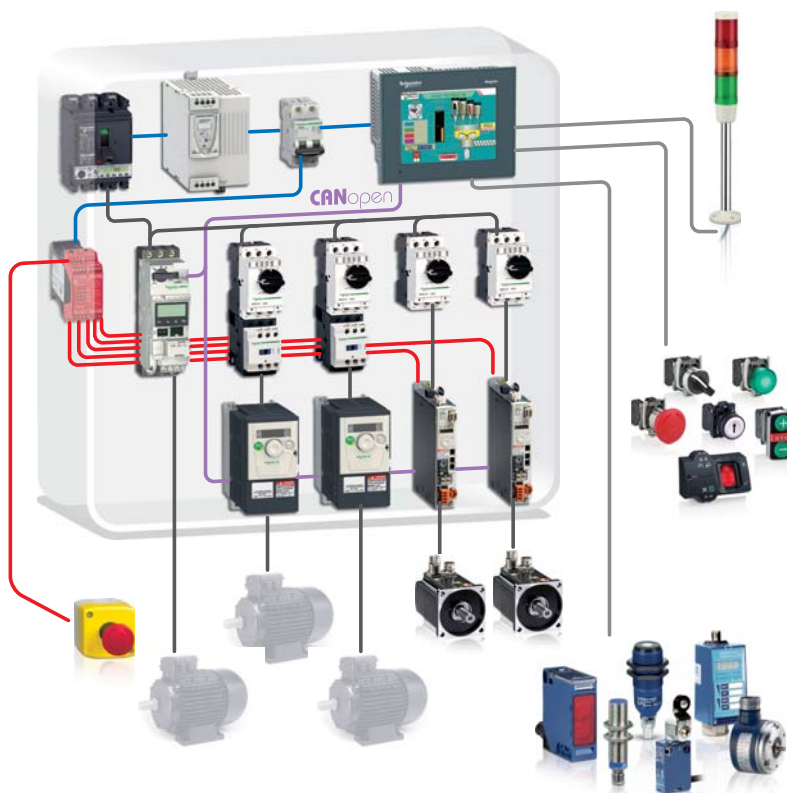

The above configuration shows an example architecture based on the Magelis **XBT GC** HMI Controller.

The **XBT ZGC CAN** expansion module provides the CANopen bus master function for the **XBT GC** HMI Controller.

The CANopen bus is made up of a master station, the Magelis **XBT GC** HMI Controller and slave stations. The master is in charge of configuration, exchanges and diagnostics to the slaves.

The CANopen bus is used to manage various slaves such as:


- Digital slaves
- Analog slaves
- Variable speed drives
- Motor starters
- ...

For an example connection from a *Distributed CANopen Optimized* architecture, see page 2/24.

HMI Controllers

CANopen bus
CANopen master bus module for Magelis™ Standard
Advanced Panels XBT GT/GK

2

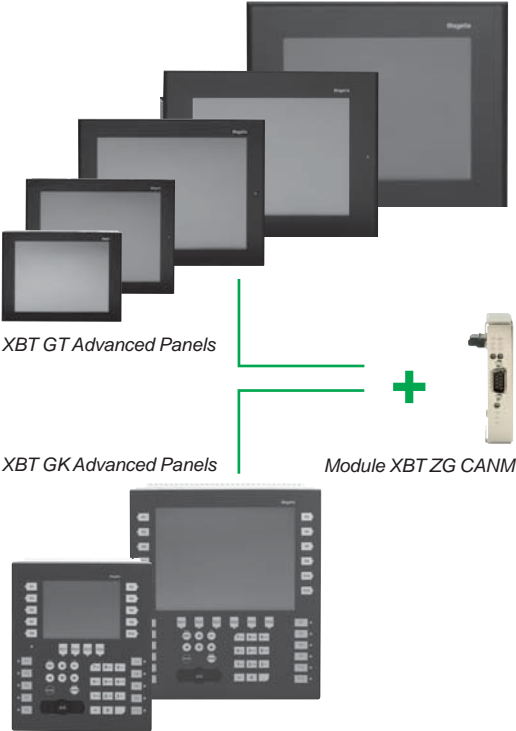

HMI function: Magelis XBT GT/GK Advanced Panels
+
Control function: XBT ZG CANM CANopen master
module


Presentation

The **XBT ZG CANM** CANopen master bus module provides the control function for the Magelis **XBT GT** (5.7", 10.4", 12.1" or 15") and **XBT GK** (5.7" or 10.4") ranges of Standard Advanced Panels (see page 2/22).

SoMachine software is used to configure the CANopen machine bus for this module (see page 2/26).

The various services on offer include:

- For Schneider Electric slaves such as ATV 312/61/71 variable speed drives and Lexium 32 servo drives one or more profiles are supplied for configuring the slave according to a predefined mode.
The use of profiles means that the user has a defined operating mode without having to configure it.
- For third-party slaves:
 - The user can choose from an editable list by simply importing an EDS (Electronic Data Sheet) description file.
 - The slave can be positioned on the bus with definition of the slave number, speed, monitoring, etc.
 - The user can select variables from the list of variables managed by the slave.
 - Variables can be linked to exchange data.
 - Exchange data can be symbolized.

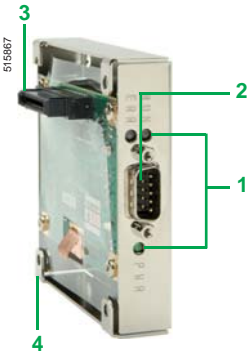

XBT ZG CANM

Description

The **XBT ZG CANM** CANopen master bus module features:

- 1 3 LEDs (PWR, RUN and ERR) providing power supply and module operation status information
- 2 A 9-way male SUB-D connector for connecting to the CANopen bus
- 3 A connector for connecting to the rear of the Magelis XBT GT/GK Standard Advanced Panels
- 4 Positions for fixing screws

Reference


Description	Reference	Weight kg
CANopen bus master module for Magelis XBT GT/GK Standard Advanced Panels Conformity class M10	XBT ZG CANM	0.100

HMI Controllers

CANopen bus

CANopen master bus module for Magelis™ Standard
Advanced Panels XBT GT/GK

Example architecture

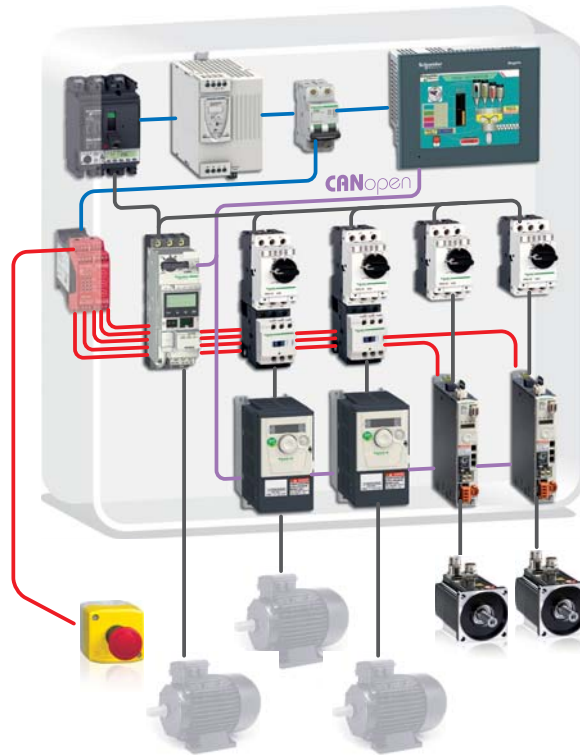

The above configuration shows an example architecture based on an **XBT GT/GK** Standard Advanced Panel.

The **XBT ZG CANM** expansion module provides the CANopen bus master function for the Magelis **XBT GT/GK** Standard Advanced Panel.

The CANopen bus is made up of a master station, the Magelis **XBT GT/GK** Standard Advanced Panel and slave stations. The master is in charge of configuration, exchanges and diagnostics to the slaves.

The CANopen bus is used to manage various slaves such as:

- Digital slaves
- Analog slaves
- Variable speed drives
- Motor starters
- ...

For an example connection from a *Distributed CANopen Optimized* architecture, see page 2/24.



XBT GT21●0/2220/2330

XBT GK monochrome touch screen terminals compatible with the XBT ZG CANM CANopen master module ^{(1) (2)}

Screen type	No. of ports	Application memory capacity	Compact Flash memory	Composite video input	No. of Ethernet ports	Reference	Weight kg
5.7" optimum QVGA screen							
STN blue mode	1 COM 1 1 COM 2 1 USB	16 MB	No	No	—	XBT GT2110	1.000
5.7" multifunction QVGA screen							
STN Black and white	1 COM 1 1 COM 2 1 USB	16 MB	Yes	No	—	XBT GT2120	1.000
					1	XBT GT2130	1.000



XBT GT4230/43●0

XBT GK colour touch screen terminals compatible with the XBT ZG CANM CANopen master module ^{(1) (2)}

Screen type	No. of ports	Application memory capacity	Compact Flash memory	Composite video input	Embedded Ethernet	Reference	Weight kg
5.7" multifunction QVGA screen							
STN	1 COM 1 1 COM 2 1 USB	16 MB	Yes	No	—	XBT GT2220	1.000
TFT	1 COM 1 1 COM 2 1 USB	16 MB	Yes	No	1	XBT GT2330	1.000
High Brightness TFT	1 COM 1 1 COM 2 1 USB	16 MB	Yes	No	1	XBT GT2930	1.000
5.7" multifunction VGA screen							
TFT	1 COM 1 1 COM 2 2 USB	32 MB	Yes	No	1	XBT GT2430	—
7.5" multifunction VGA screen							
STN	1 COM 1 1 COM 2 1 USB	32 MB	Yes	No	1	XBT GT4230	1.800
TFT	1 COM 1 1 COM 2 1 USB	32 MB	Yes	No	1	XBT GT4330	1.800
				Yes	1	XBT GT4340	1.800
Multifunction 10.4" VGA screen							
STN	1 COM 1 1 COM 2 2 USB	32 MB	Yes	No	1	XBT GT5230	3.000
TFT	1 COM 1 1 COM 2 2 USB	32 MB	Yes	No	1	XBT GT5330	2.500
				Yes	1	XBT GT5340	2,500
Multifunction 10.4" SVGA screen							
TFT	1 COM 1 1 COM 2 2 USB	32 MB	Yes	No	1	XBT GT 5430	2.500
Multifunction 12.1" SVGA screen							
TFT	1 COM 1 1 COM 2 2 USB	32 MB	Yes	No	1	XBT GT6330	3.000
				Yes	1	XBT GT6340	3.000
Multifunction 15" XGA screen							
TFT	1 COM 1 1 COM 2 2 USB	32 MB	Yes	Yes	1	XBT GT7340	5.600



XBT GT53●0



XBT GT63●0



XBT GT7340

(1) Terminals supplied with mounting kit (screw clips), locking device for USB connectors and instruction sheet. The setup documentation for XBT GT terminals is supplied in electronic format with SoMachine software (see page 2/29).

(2) All data relating to Magelis XBT GT Standard Advanced Panels is available on our site www.schneider-electric.com



XBT GK2120 / 2330



XBT GK5330


XBT GK keypad/touch screen terminals compatible with the XBT ZG CANM CANopen master module ^{(1) (2)}

Screen type	No. of ports	Application memory capacity	Compact Flash memory	Video input	No. of Ethernet ports	Reference	Weight kg
5.7" multifunction screen							
STN Black and white	1 COM 1 1 COM 2 1 USB	32 MB	Yes	No	-	XBT GK2120	—
5.7" multifunction screen							
TFT Colour mode	1 COM 1 1 COM 2 1 USB	32 MB	Yes	No	1	XBT GK2330	—
10.4" multifunction screen							
TFT Colour mode	1 COM 1 1 COM 2 2 USB	32 MB	Yes	No	1	XBT GK5330	—

(1) Terminals supplied with mounting kit (spring clips), locking device for USB connectors, customizable label sheets and instruction sheet.

(2) All data relating Magelis XBT GK Standard Advanced Panels is available on our website www.schneider-electric.com.

Optimized CANopen architecture

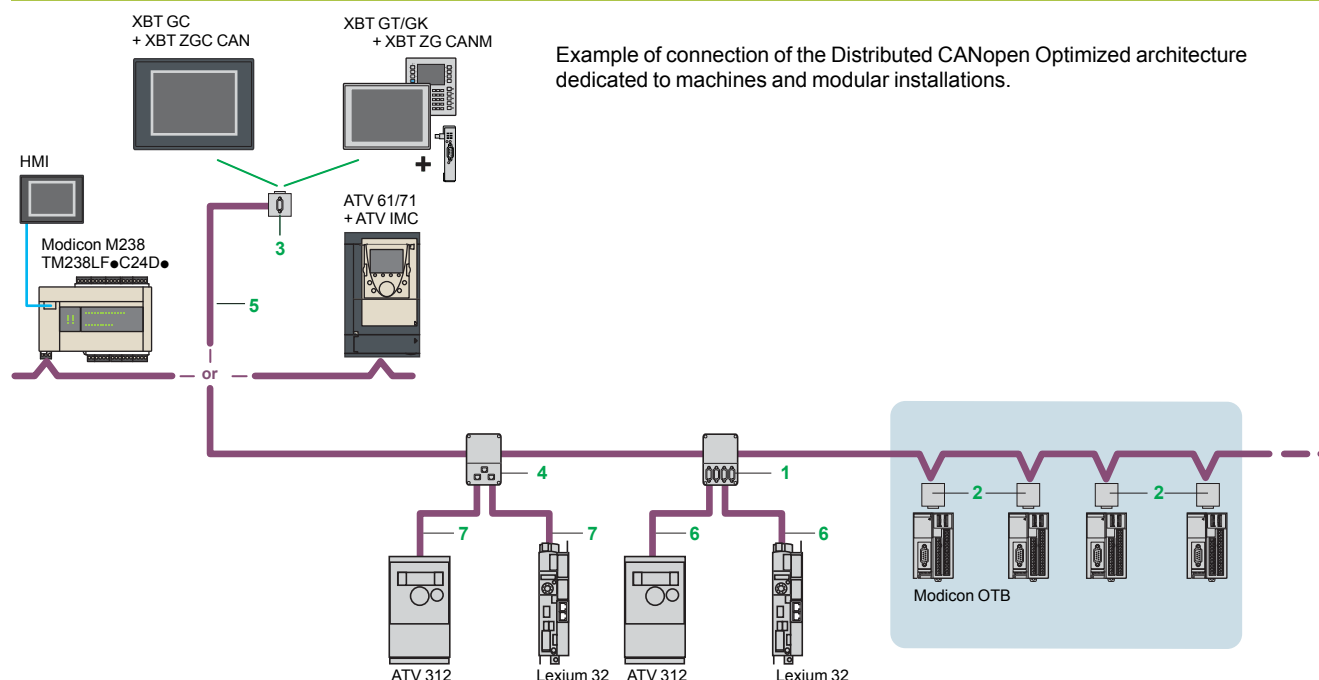

References



TSX CAN TDM4



VW3 CAN TAP2


TSX CAN KCD
F90T

TSX CAN KCD
F180T

TSX CAN KCD
F90TP


TCS CAR013M120

Standard tap junctions and connectors

Designation	Description	Item no.	Length	Unit reference	Weight kg
IP 20 CANopen tap junction	4 SUB-D ports. Screw terminal block for connecting the trunk cables Line termination	1	—	TSX CAN TDM4	0.196
IP 20 CANopen connectors (9-way female SUB-D)	Right angle	2	—	TSX CAN KCDF 90T	0.046
	Straight (1)	—	—	TSX CAN KCDF 180T	0.049
	Right angle with 9-way SUB-D for connecting a PC or diagnostic tool	3	—	TSX CAN KCDF 90TP	0.051
M12 IP 67 connectors	Male	—	—	FTX CN 12M5	0.050
	Female	—	—	FTX CN 12F5	0.050
IP 20 CANopen tap junction for Altivar and Lexium 32	2 RJ45 ports	4	—	VW3 CAN TAP2	0.250
Daisy chain taps	Equipped with: - 2 spring terminal blocks for daisy chain connection of the CANopen bus - 1 preassembled cordset with RJ45 connector for connecting the drive	—	0.6	TCS CTN 026M 16M	—
	Equipped with: - 2 RJ45 connectors for daisy chain connection of the CANopen bus - 1 preassembled cordset with RJ45 connector for connecting the drive	—	0.3	TCS CTN 023F 13M03	—
CANopen line terminators	For RJ45 connector Sold in lots of 2	—	—	TCS CAR013M120	—
	For screw terminal block connector Sold in lots of 2	—	—	TCS CAR01NM120	—

(1) To connect to the Altivar IMC card.

References (continued)

IP 20 standard cables and preassembled cordsets

Designation	Description	Item no.	Length	Unit reference	Weight kg
CANopen cables (2 x AWG 22 2 x AWG 24)	For standard environment (1), C€ marking: Low smoke zero halogen Flame-retardant (IEC 60332-1)	5	50 m	TSX CAN CA50	4.930
			100 m	TSX CAN CA100	8.800
			300 m	TSX CAN CA300	24.560
	For standard environment (1), UL certification, C€ marking: Flame-retardant (IEC 60332-2)	5	50 m	TSX CAN CB50	3.580
			100 m	TSX CAN CB100	7.840
			300 m	TSX CAN CB300	21.870
	For harsh environment (2) or mobile installation, C€ marking: Low smoke zero halogen. Flame-retardant (IEC 60332-1). Resistance to oils	5	50 m	TSX CAN CD50	3.510
			100 m	TSX CAN CD100	7.770
			300 m	TSX CAN CD300	21.700
CANopen preassembled cordsets One 9-way female SUB-D connector at each end	For standard environment (1), C€ marking: Low smoke zero halogen. Flame-retardant (IEC 60332-1)	—	0.3 m	TSX CAN CADD03	0.091
			1 m	TSX CAN CADD1	0.143
			3 m	TSX CAN CADD3	0.295
			5 m	TSX CAN CADD5	0.440
	For standard environment (1), UL certification, label marking C€: flame retardant (IEC 60332-2)	—	0.3 m	TSX CAN CBDD03	0.086
			1 m	TSX CAN CBDD1	0.131
			3 m	TSX CAN CBDD3	0.268
			5 m	TSX CAN CBDD5	0.400
CANopen preassembled cordsets	Cordsets with one 9-way female SUB-D connector and one RJ45 connector	6	0.5 m	TCS CCN 4F3 M05T	0.100
			1 m	TCS CCN 4F3 M1T	0.100
				VW3 M38 05 R010 (3)	0.100
			3 m	VW3 M38 05 R010 (3)	0.300
				TCS CCN 4F3 M3T	0.160
	Cordsets with two 9-way SUB-D connectors, one male and one female	—	0.5 m	TLA CD CBA 005	0.100
			1.5 m	TLA CD CBA 015	0.120
			3 m	TLA CD CBA 030	0.190
			5 m	TLA CD CBA 0	0.350



VW3 CAN A71



AM0 2CA 001V000



FTX DP21●●

IP 20 connection accessories

CANopen connector for Altivar 71 (4)	9-way female SUB-D. Switch for line termination. Cables exit at 180°	—	—	VW3 CAN KCDF 180T	0.100
Adaptor for Altivar 71 drive	SUB-D to RJ45 CANopen adaptor	—	—	VW3 CAN A71	0.100
CANopen preassembled cordsets	1 RJ45 connector at each end	7	0.3 m	VW3 CAN CARR03	0.100
			1 m	VW3 CAN CARR1	0.100
CANopen bus adaptor for Lexium 17D	Hardware interface for link conforming to the CANopen standard + 1 connector for connecting a PC terminal	—	—	AM0 2CA 001V000	0.110
Y-connector	CANopen/Modbus	—	—	TCS CTN011M11F	0.100

(1) Standard environment: no particular environmental constraints, operating temperature between + 5°C and + 60°C, and in fixed installations.

(2) Harsh environment: resistance to hydrocarbons, industrial oils, detergents, solder splashes, relative humidity up to 100%, saline atmosphere, significant temperature variations, operating temperature between - 10°C and + 70°C, or in mobile installations.

(3) Cordset equipped with a line terminator.

(4) For ATV 71H●●●M3, ATV 71HD11M3X, HD15M3X, ATV 71H075N4... HD18N4 drives, this connector can be replaced by the TSX CAN KCDF 180T connector.


SoMachine software suite

Simplify machine programming and commissioning

2



SoMachine software platform

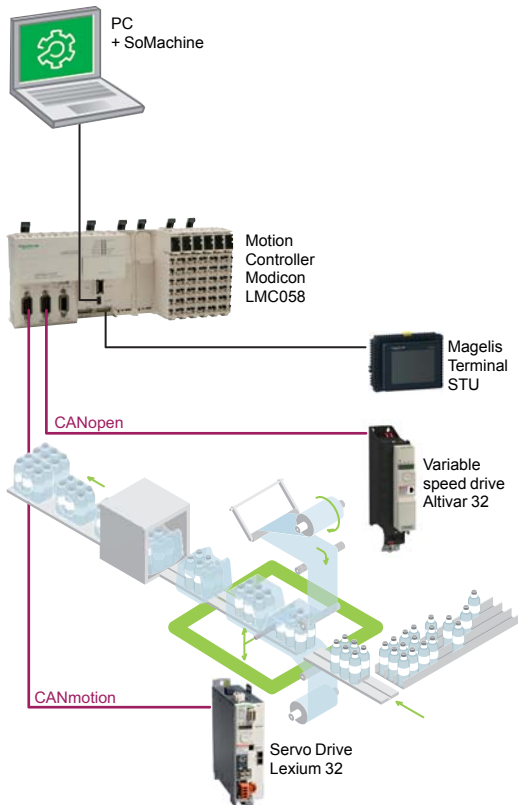

Presentation

SoMachine is the OEM solution software for developing, configuring and commissioning the entire machine in a single software environment, including logic, motion control, HMI and related network automation functions.

SoMachine allows you to program and commission all the elements in Schneider Electric's Flexible and Scalable Control platform, the comprehensive solution-oriented offer for OEMs, which helps you achieve the most optimized control solution for each machine's requirements.

Flexible and Scalable Control platforms include:

Controllers:

- HMI controllers: XBT GC, XBT GT/GK CANopen,
- Logic controllers: Modicon M238, Modicon M258,
- Motion Controller: Modicon LMC 058,
- Integrated Controller Card: Altivar IMC,
- I/Os range: Modicon TM2, Modicon TM5 and Modicon TM7 offers

HMI:

- Small Panels Magelis™ STO/STU
- Advanced Panels Magelis™ GH/GK/GT
- Optimum Advanced Panels Magelis™ GTO

SoMachine is a professional, efficient, and open software solution integrating Vijeo-Designer.

It integrates also the configuring and commissioning tool for motion control devices. It features all IEC 61131-3 languages, integrated field bus configurators, expert diagnostics and debugging, as well as outstanding capabilities for maintenance and visualisation.

SoMachine integrates tested, validated, documented and supported expert application libraries dedicated to applications in Packaging, Hoisting and Conveying.

SoMachine provides you:

- One software package
- One project file
- One cable connection
- One download operation

Visual graphic user interface

Navigation within SoMachine is intuitive and highly visual. Presentation is optimized in such a way that selecting the development stage of the desired project makes the appropriate tools available. The user interface ensures nothing is overlooked, and suggests the tasks to be performed throughout the project development cycle. The workspace has been streamlined, so that only that which is necessary and relevant to the current task is featured, without any superfluous information.

Learning centre

From the home menu, the learning centre provides several tools to get started with SoMachine. An animated file explains briefly the SoMachine interface and concept. An e-learning allows to run a self-training about SoMachine. A third section gives access to several documented examples of simple coding with SoMachine. An intuitive and efficient online help is also available, guiding you to get the best answer.

Projects management

The implemented project management principle allows to browse quickly through the existing projects getting the relevant information without the need to open them before selection.

The user can create a new project, starting from several means: using Tested Validated and Documented Architectures, using the provided examples, using an existing project or start with an empty project. There is quick access to the most recently-used projects.

There is as well a way to start a project from standard project taking advantages of a pre-configured program (task, library,)



Project management

SoMachine software suite

Simplify machine programming and commissioning

2

Project properties

For each project, the user has the option to define additional information, through simple forms. It's also possible to attach documents, a customer picture and a configuration picture.

Configuration

From the graphic user interface, the user can easily build his architecture and configure the devices of the architecture.

Description of the architecture

A graphic editor can be used to assemble the various elements easily by a simple drag & drop. A devices catalogue is displayed on the left of the screen. It is split into several sections: controllers, HMI, Miscellaneous and search.

Configuration of the device

Directly from the topologic view of the user interface, a simple click drives the user to the configuration screen of the selected device.

Programming and debug

Programming is an essential step, and the user has to carefully design it to be as efficient as possible. Advanced control and HMI functions cover all the needs of an OEM engineer in terms of creating the control and visualisation system. Powerful tools allow debug and functional tests such as simulation, step by step execution, break points and trace.

Commissioning

For an easy and fast diagnostic, the menu commissioning allows the user to check the online state of his architecture. Through the topologic view of the configuration, the devices display if you are logged in or not, as well as if they are in run or stop mode.

Documentation

Because a printed file of the project is an important element, it is possible to build and customize the project report:

- select the items to be included in the report,
- organize the sections,
- define the page layout
- and then launch the printing.

Transparency

SoMachine supports Device Type manager (DTM) because it is a field device tool (FDT) container.

With DTM's representing field device in SoMachine, direct communications are possible to every single device via SoMachine, the controller and the field bus (Modbus for all devices and CANopen for the I/O's).

From the SoMachine unique environment, the remote devices can be set-up off-line and tuned on-line.

Dedicated OEM application libraries (AFB libraries)

SoMachine can be extended through its solution extension DVD. It integrates tested, validated, documented and supported expert application libraries dedicated to many OEM applications. Their simple configuration speeds up design, commissioning, installation and troubleshooting.

These libraries cover the following applications:

- Packaging,
- Hoisting,
- Conveying.

Tested Validated Documented Architectures (TVDA)


SoMachine provides a variety of preset projects with ready-to-use architectures you can adapt to individual requirements. Some of them are generic TVDA, they are based on controllers configuration. The solution extension DVD brings specific application solutions oriented TVDA's to SoMachine.




Configuration



Commissioning

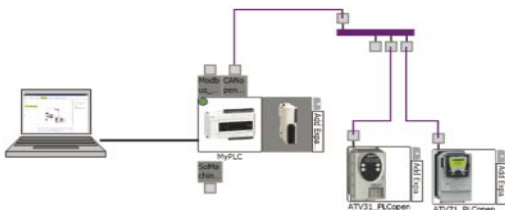

Transparency

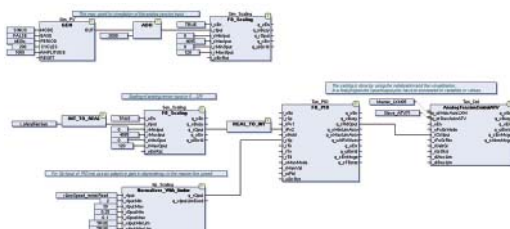

Application Function Blocks

SoMachine characteristics

Overview

IEC 61131-3 programming languages	<ul style="list-style-type: none"> ■ IL (Instruction List) ■ LD (Ladder Diagram) ■ SFC (Sequential Function Chart) ■ ST (Structured Text) ■ FBD (Function Block Diagram) ■ CFC (Continuous Function Chart)
Controller programming services	<ul style="list-style-type: none"> ■ Multi-tasking: Mast, Fast, Event ■ Functions (Func) and Function Blocks (FBs) ■ Data Unit Type (DUTs) ■ On-line changes ■ Watch windows ■ Graphical monitoring of variables (trace) ■ Breakpoints, step-by-step execution ■ Simulation ■ Visualization for application and machine set-up
HMI-based services	<ul style="list-style-type: none"> ■ Graphics libraries containing more than 4000 2D and 3D objects. ■ Simple drawing objects (points, line, rectangles, ellipses, etc ...) ■ Preconfigured objects (button, switch, bar graph, etc ...) ■ Recipes (32 groups of 256 recipes with max. 1024 ingredients) ■ Action tables ■ Alarms ■ Printing ■ Java scripts ■ Multimedia file support: wav, png, jpg, emf, bmp ■ Variable trending
Motion services	<ul style="list-style-type: none"> ■ Embedded devices configuration and commissioning ■ CAM profile editor ■ Sample application trace ■ Motion and drive function blocks libraries for inverters, servos and steppers ■ Visualization screens ■ Logical encoder
Global services	<ul style="list-style-type: none"> ■ User access and profile ■ Project documentation printing ■ Project comparison (control) ■ Variable sharing based on publish/subscribe mechanism ■ Library version management ■ Energy efficiency machine monitoring
Integrated fieldbus configurators	<ul style="list-style-type: none"> ■ Control network: <ul style="list-style-type: none"> □ Modbus Serial Line □ Modbus TCP ■ Field bus: <ul style="list-style-type: none"> □ CANopen □ CANmotion ■ Connectivity: <ul style="list-style-type: none"> □ Profibus-DP □ Ethernet IP
Expert and solutions libraries	<ul style="list-style-type: none"> ■ PLCopen function blocks for Motion control <ul style="list-style-type: none"> □ Example: MC_MoveAbsolute, MC_CamIn, ServoDrive, ... ■ Packaging function blocks <ul style="list-style-type: none"> □ Example: Analog film tension control, rotary knife, lateral film position control, ... ■ Conveying function blocks <ul style="list-style-type: none"> □ Example: tracking, turntable, conveyor , ... ■ Hoisting functions <ul style="list-style-type: none"> □ Hoisting function blocks: anti-sway, anti-crab, hoisting position synchronisation, ... □ Application template for industrial crane ■ Pumping application <ul style="list-style-type: none"> □ Pumping function blocks □ Application template for booster ■ Energy Efficiency library

Product offer

SoMachine software is delivered on a DVD, it is a product oriented version that includes all SoMachine features related to generic hardware (M238, M258, LMC058, XBT GC, Altivar IMC), as well as generic TVDA

The solution features are added to SoMachine by installing its solution extension DVD. It includes all SoMachine solutions hardware, plus all the dedicated application libraries and TVDA.

References

- SoMachine is available in 6 languages:
 - English
 - French
 - German
 - Italian
 - Spanish
 - Simplified Chinese.
- System Requirements:
 - Processor: Pentium 4 - 1,8 GHz or higher , Pentium M 1.0 GHz or equivalent
 - RAM Memory: 2 GByte; recommended: 3 GByte
 - Hard Disk: 3.5 GB, recommended: 5 GB
 - OS: Windows XP Professional, Windows 7 Professional 32/64 bytes
 - Drive: DVD reader
 - Display: 1024 × 768 pixel resolution or higher
 - Peripherals: a Mouse or compatible pointing device
 - Peripherals: USB interface
 - Web Access: Web registration requires Internet access
- The documentation is supplied in electronic format: complete on-line help plus complementary documentation in pdf version.

SoMachine software for generic controllers

Supported controllers	TVDA	Reference	
		DVD (1)	Licence (2)/ number & type
■ M238	Optimized HW XBT GC	MSD CHNSFNV31 + Trial licence (30 days)	MSD CHNLMUA /1 (Single)
■ M258	Optimized HW M238		MSD CHNLMUA /1 (Single)
■ LMC058	Optimized CANopen M238		MSD CHNLMUA /10 (Team)
■ XBT GC	Optimized AS-Interface M238		MSD CHNLMUA /100 (Facility)
■ XBT GT/GK with control function	Optimized CANopen XBT GC/GT/GK		
■ Altivar IMC	Optimized CANopen Altivar IMC		
	Performance HW M258		
	Performance CANopen M258		
	Performance CANmotion LMC058		

SoMachine solution extension for Solution controllers (3)

Added controllers	Added TVDA	Added libraries	Reference (4)
			DVDs and Licence / number & type
■ M238S	Optimized CANopen Altivar	Hoisting Conveying Packaging	MSD CHLLMUV31S0 / 1 (Single)
■ M258S	IMC		MSD CHLLMTV31S0 / 10 (Team)
■ LMC058S	Performance CANmotion		MSD CHLLMTV31S0 / 10 (Team)
■ XBT GC with CANopen module type S	LMC058		MSD CHLLMFV31S0 /100 (Facility)
■ XBT GT/GK with control function type S	Hoisting Optimized CANopen M238		
■ Altivar IMC with control function type S	Conveying Performance CANmotion LMC058		

SoMachine software compatibility and hardware control platforms

Product type	Version
Logic controller Modicon M238	≥ V1.0
HMI controller XBT GC	
Logic controller Modicon M238S	≥ V2.0
Logic controller Modicon M258	
Logic controller Modicon M258S	
Motion controller Modicon LMC058	≥ V3.0
Motion controller Modicon LMC058S	≥ V2.0
HMI controller XBT GT/GK with control function type S, XBT GC with CANopen module type S	
Altivar IMC integrated controller card	≥ V3.1
Altivar IMC integrated controller card with control function type S	≥ V2.0
TM5 CANopen Interface	≥ V3.0
TM7 CANopen Interface block	
Altivar IMC integrated controller card (with patch)	

(1) The DVD is mandatory and delivered with a trial licence.

(2) One of the 3 type of Licences is mandatory.

(3) For this offer, please contact Schneider electric.

(4) Each reference for SoMachine solution software contains: one generic trail DVD, one solution extension V3.1 DVD and one licence.

PC Panels Magelis™

Selection guide page 3/2

■ Maintenance-free PC Panels Magelis

- Presentation page 3/4
- Magelis Smart 12" page 3/8
- Separate components and equivalent product table page 3/8

■ PC Panels Magelis

- Presentation page 3/4
- Magelis Compact iPC 12" page 3/9
- Separate components and equivalent product table page 3/9

Magelis™ Panel PC and Magelis™ BOX PC

General selection guide page 3/10

■ General presentation page 3/12

■ Magelis Panel PC, Optimum range

Selection guide page 3/14

- Presentation page 3/16
- 10.4" touch screens with aluminium front panel bezel page 3/17
- 15" touch screens with stainless steel front panel bezel page 3/17

■ Magelis Panel PC, Universal and Performance ranges

Selection guide page 3/18

- Presentation page 3/22
- 15" touch screen, Universal range page 3/26
- 15" touch screen, Performance range page 3/27
- 19" touch screen, Universal range page 3/28
- 19" touch screen, Performance range page 3/29

■ Magelis Panel PC, Optimum / Universal / Performance ranges

- Separate components page 3/30
- Configured Magelis Panel PC industrial PC page 3/31
- Equivalent product table page 3/32

■ Industrial PCs Magelis BOX PC, Universal and Performance ranges

Selection guide page 3/34

- Presentation page 3/36
- Magelis BOX PC page 3/40
- Separate components page 3/41
- Configured Magelis BOX PC page 3/42
- Equivalent product table page 3/43

Magelis™ iDisplay flat screens

Selection guide page 3/44

■ Magelis iDisplay flat screens

- Presentation page 3/46
- iDisplay flat screens: 15", 19" page 3/47
- Separate components page 3/47

Industrial PC
Model

Maintenance-free PC Panels
12" Magelis Smart



Screen	Type
	Definition
	Number of colours
	Brightness

Touch panel

CPU	Processor	
	Storage	Storage disks
		Compact Flash card (SLC type)
	RAM (1 memory slot)	
	Expansion slots	PCI bus
		Memory cards
	Ethernet TCP/IP ports	
	I/O ports	On the front panel
		Other

12" colour TFT LCD
SVGA 800 x 600
262 144
≥ 250 cd/m ² (adjustable)
Analog resistive, 1 million cycles

Intel Celeron M 1 GHz
—
2 GB minimum, expandable to 4 GB (with OS and installed software)
512 MB SDRAM expandable to 1024 MB
—
1 x free bus slot (taking 1 type II PCMCIA card)
2 RJ45 ports: 1 x 10/100/1000BASE-T and 1 x 10/100BASE-T
1 x USB 2.0 type A
4 x USB 2.0 type A
1 x COM1 (RS 232C, 9-way male SUB-D)
1 x audio (1 line out, mini-jack)
1 x RAS (1)

Standards and certifications

■ UL 508, CSA 142, IEC 61131-2,
■ ATEX II 3 dust (zone 22) (2)

Integrated software	Operating system
	Human Machine Interface
	Supervision
	Development environment
	Other

Windows XP Embedded Standard 2009
Vijeo Designer Run Time 21-day trial version (3)
Vijeo Citect Web Client
.NET Framework
Internet Explorer, Outlook Express Client, Microsoft Office Readers

Supply voltage

■ 24 V $\overline{\text{---}}$ (19.2...28.8 V)
■ 100...240 V \sim (85...265 V)
■ 40 W max. ($\overline{\text{---}}$)
■ 95 VA max. (\sim)

Consumption (without peripherals)

Degree of protection (when mounted on enclosure door)

IP 65 for front panel when USB port not in use, IP 20 for rest of PC panel
--

Dimensions	Overall dimensions (W x H x D)
	Cut-out (W x H)

313 x 239 x 60 mm
301.5 x 227.5 (+1, -0) mm

Environment	Operating temperature
	Vibration resistance during operation

0...+ 50°C
0.075 mm amplitude from 10...57.6 Hz, 1 g from 57.6...150 Hz, conforming to EN 61131-2

References of Magelis Smart PC Panels	Vijeo Citect Web Client	100...240 V \sim
		24 V $\overline{\text{---}}$

MPC ST2 1NAJ 20T

References of PC Panels Magelis Compact iPC	With Hard Disk	100...240 V \sim
	With Flash Disk SDD	100...240 V \sim

MPC ST2 1NDJ 20T

Pages

3/8

(1) Reliability, Availability and Serviceability.
(2) $\overline{\text{---}}$ version only.



PC Panels

Magelis Compact iPC 12"



12" colour TFT LCD

XGA 1024 x 768

262 144

≥ 250 cd/m² (adjustable)

Analog resistive, 1 million cycles

Intel Celeron M 1.5 GHz

■ For **MPC KT2 2NAX 20N**: IDE hard disk (HDD) (2.5") ≥ 250 GB

■ For **MPC KT2 2MAX 20N**: Flash disk (SSD type SLC) ≥ 15 GB

—

512 MB SDRAM expandable to 1024 MB (1 slot)

1 x free PCI bus slot

1 x free bus slot for Compact Flash card (SLC type)

1 x free bus slot for PCMCIA card (taking a maximum of 1 type II card)

2 RJ45 ports: 1 x 10/100/1000BASE-T and 1 x 10/100BASE-T

1 x USB 2.0 type A

4 x USB 2.0 type A

1 x COM1 (RS 232C, 9-way male SUB-D)

1 x RAS (9-way female SUB-D)

1 x audio (line out, mini jack)

UL 508, IEC 61131-2, cUL

Windows XP Pro SP2

Vijeo Designer Run Time 21-day trial version (3)

—

—

—

100...240 V ~ (85...265 V), conforming to EN 61131-2

120 VA max.

IP 65 for front panel (when USB port on front panel not in use), IP 20 for rest of PC Panel

313 x 239 x 103 mm

301.5 x 227.5 (+1, -0) mm

0...+ 50°C

0.075 mm amplitude from 10...57.6 Hz, 1 g from 57.6...150 Hz, conforming to EN 61131-2

MPC KT2 2NAX 20N

MPC KT2 2MAX 20N

3/9

(3) Unlimited usage available by activation of licence **VJDSNRTMPC** (sold separately, see page 3/9).



More technical information on www.schneider-electric.com



Presentation

UL 508 certified as automation products, Magelis Smart and Magelis Compact iPC PC Panels are the natural extension to operator terminals. They have the same cut-out dimensions for mounting, but offer an open operating system.

Magelis Smart and Magelis Compact iPC meet the needs of machine manufacturers, system integrators and users by integrating as closely as possible the features of industrial terminals:

- Extremely easy installation and setup
- Compact size
- Openness to Web technologies
- Maintenance-free operation of Magelis Smart due to no rotating parts (no fan or hard disk)

Magelis Smart and Magelis Compact iPC PC Panels offer the openness of the PCs to Windows XP:

- Windows XP Embedded on Compact Flash card for Magelis Smart
- Windows XP Pro on Hard disk for Magelis Compact iPC

Therefore, they are compatible with standard Windows applications, such as Internet Explorer, Outlook Express, Office readers and third-party software.

They are also supplied with a 21-day trial version of Vijeo Designer Run Time. Continued use of Vijeo Designer requires a licence which is sold separately (see page 3/7).

Magelis Smart and Compact iPC are "all in one" PC Panels with an IP 65 front panel and a high-definition analog touch panel.

They have two built-in Ethernet TCP/IP ports:

- 1 x 10/100/1000BASE-T
- 1 x 10/100BASE-T

With these two ports they are suitable for use with Transparent Ready architectures and equipment (combination of Web and Ethernet TCP/IP technologies). They therefore allow the viewing of Web pages either locally or remotely, with the same level of ease.

Magelis Smart

Magelis Smart has a 12" SVGA LCD TFT colour screen and an Intel Celeron M 1 GHz processor. Windows XP Embedded Standard 2009 is installed on its Compact Flash card together with the following software components:

- Internet Explorer browser and Outlook Express e-mail client
- JVM (Java Virtual Machine)
- Windows Terminal Services Client for client/server architectures
- Office readers for access to device documentation (.pdf, .doc, .xls and .ppt documents)
- Vijeo Citect Web Client
- Vijeo Designer (demo version)
- .NET Framework

With these components Magelis Smart can be used for the system diagnostics, viewing and setting of Schneider Electric Transparent Ready products, as well as for access to FactoryCast services (see "Transparent Ready, embedded Web servers") and access to Vijeo Citect SCADA servers (with a Web Client licence).

Magelis Smart 12" is available for 24 V DC or 100...240 V AC supplies.

Magelis Compact iPC


Magelis Compact iPC has a 12" XGA LCD TFT colour screen and an Intel Celeron M 1.5 GHz processor. Windows XP Pro is installed, enabling the running of third-party software. It is equipped with:

- 512 MB expandable RAM
- A PCI expansion slot
- A replaceable 250 GB hard disk or a 15 GB Flash Disk (SLC technology SSD)
- A slot for a type II PCMCIA card

Magelis Compact iPC 12" is available for a 100...240 V AC supply.

Magelis Smart and Magelis Compact iPC architecture examples

Connections to Vijeo Citect architectures

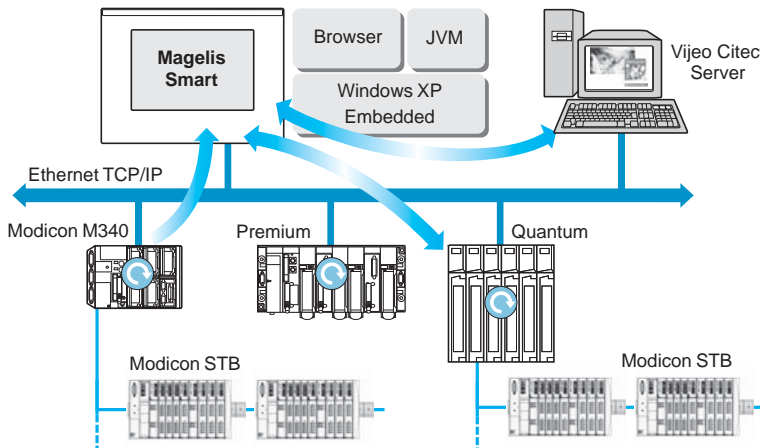


With a built-in dual Ethernet port, Magelis Smart and Compact iPCs can be integrated into "full Ethernet" architectures, such as Transparent Ready (transparent communication on the Ethernet TCP/IP network). Communication services and Web services enable data to be shared and distributed between levels of the Transparent Ready architecture.

Magelis Smart & Compact iPC, facilitate the setup of Client stations in relation to Web servers embedded in the automation systems, the field devices (distributed I/O, variable speed drives, identification systems, etc.) and any other IT application.

Magelis Smart

With the pre-installed Vijeo Citect Web Client software and by using Internet Explorer, Magelis Smart 12" products are Web Client on a Vijeo Citect server provided that the Web Client licence is activated on the Vijeo Citect server.

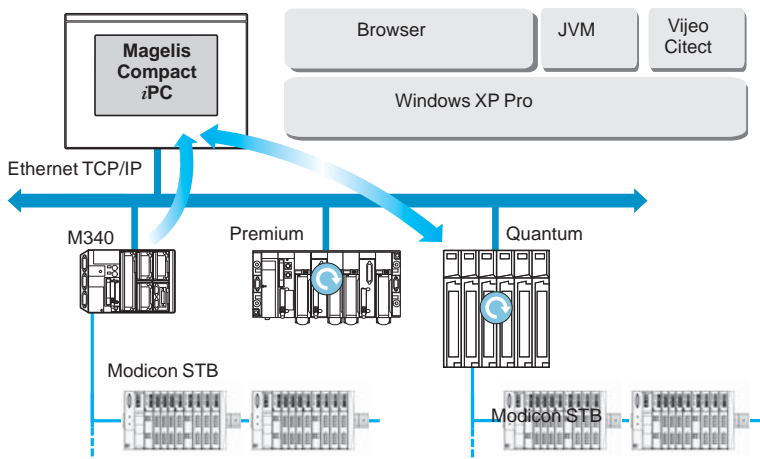


Magelis Compact iPC

A Vijeo Citect client/server licence can be installed on Magelis Compact iPC 12" products, preferably on the Flash Disk version, in order to avoid the risk of a non-operational storage device. For a long life of the Flash Disk, it is strongly recommended that:




- ☐ at least 50% of available disk space is kept available for sharing of written data
- ☐ and a reasonable storage frequency is maintained

Human Machine Interface applications

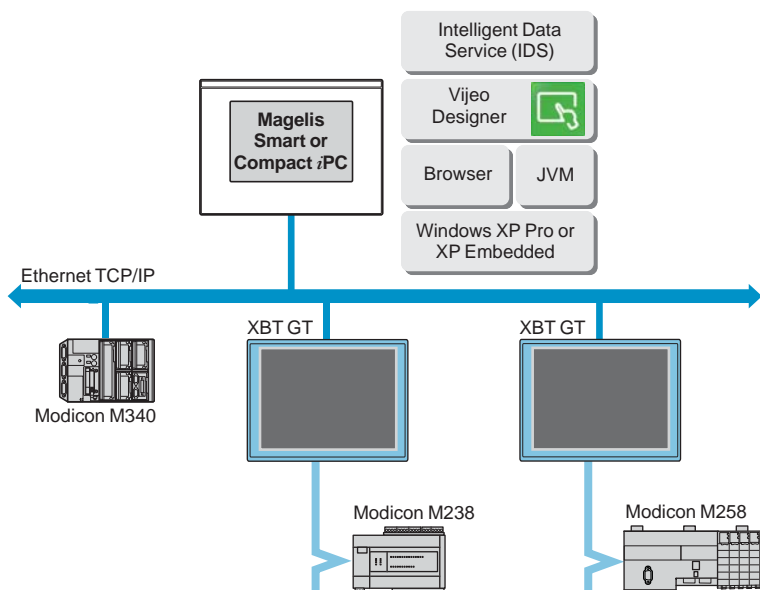

Magelis Smart and Compact iPC are supplied with a 21-day trial version of Vijeo Designer Run Time. Continued use of Vijeo Designer requires a licence which is sold separately (see page 3/9).

Vijeo Designer can be used to create control applications for Magelis terminals and industrial PCs. It can be installed on any storage device without reducing service life, the writing operations to disk being limited to archiving.

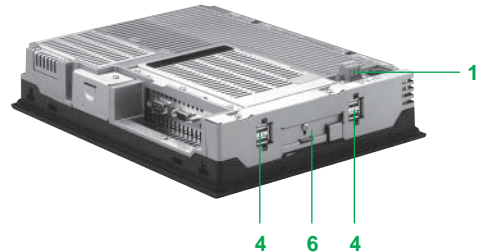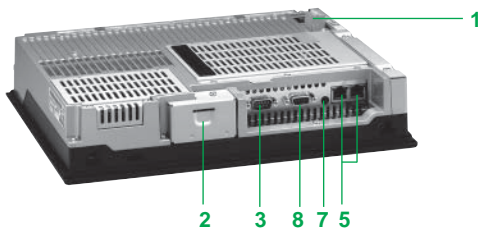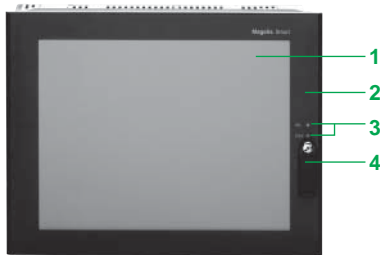

Magelis Smart 12" PC Panels

Touch screen front panel

The touch screen front panel of the 12" industrial PCs **MPC ST2 1N●J 20T** comprise:

- 1 A 12" SVGA active matrix colour LCD TFT screen (maximum display area 800 x 600) with high-definition analog touch panel
- 2 An aluminum alloy front panel with IP 65 membrane (mounted on a hardened steel frame)
- 3 Two LEDs marked:
 - ON (green), PC switched on
 - DISK (green), accessing IDE bus (accessing Compact Flash memory, etc.)
- 4 A dust and damp proof USB 2.0 port


Underside and left-hand side

The underside and left-hand side of the industrial PCs **MPC ST2 1N●J 20T** comprise:

- 1 A removable screw terminal for connecting the AC power supply
- 2 Access to the Compact Flash memory card containing the operating system and installed software
- 3 One 9-way male SUB-D connector marked COM1 for the RS 232 serial link
- 4 4 USB 2.0 ports
- 5 2 RJ45 ports for the Ethernet link:
 - 1 x 10/100/1000 Mbps
 - 1 x 10/100 Mbps
- 6 A slot for 1 additional PCMCIA type II card
- 7 A mini-jack port for a loudspeaker
- 8 An RAS (Reliability, Availability and Serviceability) port

All expansion slots and connection elements are therefore accessible from the rear of the PC.

Note: AC versions have an On/Off switch.

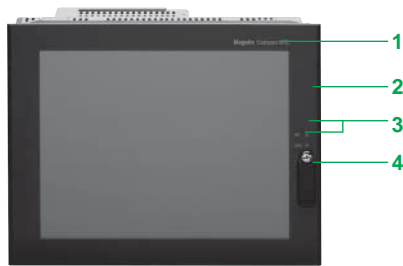


Magelis Compact iPC 12" PC panels

Touch screen front panel

The touch screen front panel of the 12" industrial PCs **MPC KT2 2●AX 20N** comprise:

- 1 A 12" XGA active matrix colour LCD TFT screen (maximum display area 1024 x 768) with high-definition analog touch panel
- 2 An aluminium alloy front panel with IP 65 membrane (mounted on a hardened steel frame)
- 3 Two LEDs marked:
 - ☐ ON (green), PC switched on
 - ☐ DISK (green), accessing IDE bus (accessing hard disk memory, etc.)
- 4 A cover plate which provides IP 65 protection when in position and gives access when removed to:
 - ☐ A USB 2.0 port
 - ☐ A "pencil point" RESET button for restarting the processor

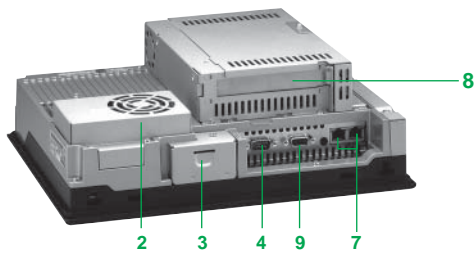


Underside and side panels

All expansion slots and connection elements are accessible from the rear of the PC:

- 1 Connector for plugging in the 100 to 240 V ~ power cable
- 2 One vent equipped with an anti-dust filter and a fan
- 3 A slot for an additional Compact Flash memory card
- 4 One 9-way male SUB-D port marked COM1 for serial links
- 5 4 USB 2.0 ports
- 6 A slot for 1 additional PCMCIA card
- 7 2 RJ45 ports for the Ethernet link:
 - ☐ 1 x 10/100/1000 Mbps
 - ☐ 1 x 10/100 Mbps
- 8 A slot for PCI bus expansion card
- 9 An RAS port

Note: AC versions have an On/Off switch.

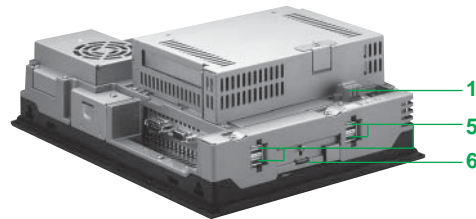



MPC ST2 1NAJ 20T

Magelis Smart PC Panel - 12" screen (1)**With 2 GB Compact Flash card**

Supply voltage	Processor RAM	Free expansion slots	Vijeo Citect	Reference	Weight kg
24 V $\overline{\text{---}}$	Celeron M 1 GHz 512 MB expandable to 1024 MB	1 PCMCIA	Web client	MPC ST2 1NDJ 20T	3.800
100...240 V \sim	Celeron M 1 GHz 512 MB expandable to 1024 MB	1 PCMCIA	Web client	MPC ST2 1NAJ 20T	3.800

Separate components for 12" Magelis Smart

Description	Characteristics	Compatible with (2)	Reference	Weight kg
Licence Vijeo Designer Run Time	Unlimited	All 12" Smart models	VJDSNRTMPC	—
RAM expansion kit	512 MB	All 12" Smart models	MPC YK0 5RAM 512	—
	1024 MB	All 12" Smart models	MPC YK2 2RA1 024	—
Compact Flash memory cards	2 GB, blank	All 12" Smart models	MPC YN0 0CF2 00N	0.050
	4 GB, blank	All 12" Smart models	MPC YN0 0CF4 00N	0.050
PCMCIA adaptor for Compact Flash card	Enables a 12" Smart panel to receive the second Compact Flash card needed for Vijeo Designer in the PCMCIA slot	All 12" Smart models. All memory cards Compact Flash	XB T ZGADT	0.050
Maintenance kit	Includes panel mounting fixings and seals	All 12" Smart models	MPC YK2 0MNT KIT	—
Screen protection	Protective film	All 12" Smart models	MPC YK2 0SPS KIT	—
Replacement power supply connector	AC connector	All 12" Smart models.	MPC YN0 0PWA CTE	—

Magelis Smart equivalent product table

Type	Old range	New range
~ 12" Smart	MPC ST2 1NAJ 10R	MPC ST2 1NAJ 20T + VJDSNRTMPC

(1) Magelis Smart are supplied with a trial version of Vijeo Designer Run Time. Unlimited usage available by activation of licence VJDSNRTMPC (see above).

(2) And software package variants when available.



MPC KT2 1●AX 20N

Magelis Compact iPC PC Panel - 12" screen ⁽¹⁾

With 250 GB minimum Hard Disk

Supply voltage	Processor RAM	Free expansion slots	Vijeo Citect	Reference	Weight kg
100...240 V ~	Celeron M 1.5 GHz 512 MB expandable to 1024 MB	1 PCI 1 Compact Flash 1 PCMCIA (type II)	—	MPC KT2 2NAX 20N (1)	4.500

With Flash Disk 15 GB minimum

100...240 V ~	Celeron M 1.5 GHz 512 MB expandable to 1024 MB	1 PCI 1 Compact Flash 1 PCMCIA (type II)	—	MPC KT2 2MAX 20N (1)	4.500
---------------	--	--	---	--------------------------------	-------

Separate components for 12" Magelis Compact iPC


Description	Characteristics	Compatible with (2)	Reference	Weight kg
Vijeo Designer Run Time licence	Unlimited	All Compact iPC 12" models	VJDSNRTMPC	—
RAM expansion kit	512 MB	All Compact iPC 12" models	MPC YK0 5RAM 512	—
	1024 MB	All Compact iPC 12" models	MPC YK2 2RA1 024	—
Hard disk	≥ 250 GB	12" Compact iPC PC panel MPC KT2 2●AX 20N	MPC YNK2 SHD 20N	—
Flash Disk SSD	≥ 15 GB	12" Compact iPC PC panel MPC KT2 2●AX 20N	MPC YNK2 MSD 20N	—
Maintenance kits	Includes panel mounting fixings and seals	All Compact iPC 12" models	MPC YK2 0MNT KIT	—
Screen protection	Protective film	All Compact iPC 12" models	MPC YK2 0SPS KIT	—
Replacement power supply connector	AC connector	All Compact iPC 12" models	MPC YN0 0PWA CTE	—

Magelis Compact iPC equivalent product table

Type	Old range	New range
12" Compact iPC	MPC KT2 2NAX 00R	MPC KT2 2NAX 20N + VJDSNRTMPC

(1) Magelis Compact iPC are supplied with a trial version of Vijeo Designer Run Time. Unlimited usage available by activation of licence **VJDSNRTMPC** (see above).

(2) And software package variants when available.



Type of Magelis iPC		Magelis Panel PC		
Industrial environments		Optimum range	Universal range	
		Maintenance-free	Maintenance-free	Standard
				
Fanless		★★★★★	★★★★★	★★★★★
Diskless		★★★★★	★★★★★	—
Sizes of colour touch screen and front panel bezel material		<div><input type="checkbox"/> 10.4" Aluminium bezel</div> <div><input type="checkbox"/> 15" Aluminium or Stainless steel bezel</div> <div><input type="checkbox"/> 19" Aluminium bezel</div>		
CPU (1)	Processor	Intel® ATOM™ Z510 (1.1 GHz)Intel® ATOM™ N270 (1.6 GHz)		
	PCI slot	00 or 2		
	Storage	Compact Flash card (SLC technology) and integrated SD card reader	Compact Flash card (SLC technology) or Flash disk (SSD) with 5 year warranty (2)	Hard disk
	RAM	1 GB	1 or 2 GB	
Operating system		Windows® Embedded Standard 2009	Windows® Embedded Standard 2009 or Windows® XP Professional SP3	Windows® XP Professional SP3
Supply voltage	Aluminium bezel versions	24 V —	24 V — or 100...240 V ~	
	Stainless steel bezel versions	—	24 V —	
Standards and certifications		<div><input type="checkbox"/> CE</div> <div><input type="checkbox"/> cULus</div> <div><input type="checkbox"/> cULus Haz Loc</div> <div><input type="checkbox"/> ATEX II 3 Gas and Dust Zone 2/22 (Optimum range 15" Stainless steel bezel version only) and</div> <div><input type="checkbox"/> ATEX II 3 Dust Zone 22 (Universal range 15" Stainless steel bezel version only)</div> <div><input type="checkbox"/> EN 1672-2 Food and beverage processing machines and FDA 21CFR 177.206 specific seals (Stainless steel bezel versions only)</div> <div>...</div>		
Marine certification		Bridge Class (only 24 V — Magelis Panel PC with 15" or 19" touch screen and Aluminium bezel)	—	
Software		Vijeo Designer Run Time Demo (21-day trial version). Unlimited licence, to be ordered separately (VJDSNRTMPC). Vijeo Citect, depending on the model		
References	Aluminium bezel versions	HMI PWC●●●●●	HMI PUC●●●●● HMI PUF●●●●●	HMI PUH●●●●●
	Stainless steel bezel versions	HMI PVC7 D0E01	HMI PTF7 D2P01	HMI PTH7 D2P01
Pages		3/14 and 3/15	3/18 to 3/21	
Made-to-order configuration		See configured Magelis Panel PC on page 3/31		

(1) For other options available (interface for backup battery, 3rd serial port, etc.) in made-to-order configuration, see pages 3/31 (Magelis Panel PC) and 3/42 (Magelis BOX PC).


(2) For general conditions of manufacturer's 5 year warranty: please consult our Customer Care Centre.

(3) See page 3/44.



Magelis Panel PC		Magelis BOX PC		Performance range	
Performance range		Universal range		Performance range	
Harsh	Standard	Maintenance-free	Standard	Harsh	Standard
					
—	—	★★★★★	—	—	—
★★★★★	—	★★★★★	—	★★★★★	—
<input type="checkbox"/> 15" Aluminium or Stainless steel bezel <input type="checkbox"/> 19" Aluminium bezel		Compatible with all screens in the Magelis iDisplay range (3)			
Intel® Core™ 2 Duo P8400 (2.26 GHz) + Intel® GM45 chipset		Intel® ATOM™ N270 (1.6 GHz)		Intel® Core™ 2 Duo P8400 (2.26 GHz) + Intel® GM45 chipset	
0 or 2		1 or 2		2 or 5	
Flash disk (SSD) with 5 year warranty (2)	Hard disk	Compact Flash card (SLC technology) or Flash disk (SSD) with 5 year warranty (2)	Hard disk	Flash disk (SSD) with 5 year warranty (2)	Hard disk
2 or 4 GB		1 or 2 GB		2 or 4 GB	
Windows® 7 Ultimate 64-bit		Windows® Embedded Standard 2009 or Windows® XP Professional SP3	Windows® XP Professional SP3	Windows® 7 Ultimate 64-bit	
24 V $\overline{\text{---}}$ or 100...240 V \sim		24 V $\overline{\text{---}}$			
100...240 V \sim		—			
<input type="checkbox"/> CE <input type="checkbox"/> cULus <input type="checkbox"/> cULus Haz Loc <input type="checkbox"/> ATEX II 3 Dust Zone 22 (Stainless steel bezel versions only) <input type="checkbox"/> EN 1672-2 Food and beverage processing machines and FDA 21CFR 177.206 specific seals (Stainless steel bezel versions only) ...		<input type="checkbox"/> CE <input type="checkbox"/> cULus <input type="checkbox"/> cULus Haz Loc <input type="checkbox"/> ATEX II 3 Dust Zone 22 ...			
—		Bridge Class	—		
Vijeo Designer Run Time Demo (21-day trial version). Unlimited licence, to be ordered separately (VJDSNRTMPC) Vijeo Citect, depending on the model					
HMI PPF●●●●●	HMI PPH●●●●●	HMI BUCN●●●●● HMI BUFN●●●●●	HMI BUHN●●●●●	HMI BPDF●●●●●	HMI BPHD●●●●●
—	HMI PRH7 A2701	—	—	—	—
3/19 and 3/21		3/34 and 3/35			
See configured Magelis Panel PC on page 3/31		See configured Magelis BOX PC on page 3/42			



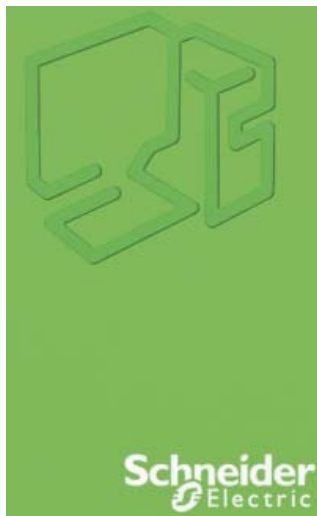

Schneider Electric Magelis iPC

Presentation

The Magelis iPC offer includes products that are rugged and certified for automation applications. The 15" screen Magelis Panel PC versions with a stainless steel front panel bezel and ATEX certification are particularly recommended for certain specific sectors (food and beverage, chemical, pharmaceutical, gas and petroleum, etc.).

This offer includes:

- Magelis Panel PCs: "All in One" products incorporating an industrial PC and a 10", 15" (1) or 19" colour touch screen, available in the following ranges:
 - Optimum: 10" or 15" touch screen (1)
 - Universal: 15" (1) or 19" touch screen
 - Performance: 15" (1) or 19" touch screen
- Magelis BOX PCs: Industrial PCs available in the following ranges:
 - Universal (1 or 2 PCI slots)
 - Performance (2 or 5 PCI slots)

Magelis BOX PCs can be combined with Magelis iDisplay screens (see page 3/44).

This Magelis iPC offer is suitable for numerous applications and different types of automation environment:

- Maintenance-free environment: Fanless Magelis iPC (unaffected by dust, no filters to clean, etc.) and without any rotating parts such as a hard disk. Data storage on Compact Flash card or on Flash disk offers good resistance to vibration and long life.
- Harsh environment: Diskless Magelis iPC
- Standard environment: Magelis iPC with hard disk offering a high storage capacity

Rugged and certified for automation applications

With their rugged design and construction, Magelis iPC industrial PCs are specifically designed for use in automation applications.

They benefit from the following certifications (2):

- cULus (UL 508, CSA 22.2 no. 142), Industrial Control Equipment
- cULus Haz Loc Class I Div 2 (ANSI/ISA 12.12.01, UL 1604, CSA 22.2 n° 213)
- ATEX II 3 Gas and Dust zone 2/22 in explosive atmospheres (3)
- Germanischer Lloyd (Bridge Class) for marine applications (3)
- C-Tick, GOSTCE

The 15" screen Magelis Panel PCs with stainless steel front panel bezel conform to the food and beverage processing machines standard EN 1672-2. They are fitted with specific seals and conform to the standard FDA 21CFR 177.206.

To simplify maintenance, Magelis iPCs integrate functions for monitoring the internal temperature of both the fans and the hard disk. Magelis iPC Universal and Performance range PCs have options for high availability applications:

- RAID PCI card with 2 redundant hard disks
- Backup battery (requires the battery-backed power supply interface module)

Their resistance to temperature, vibration and shock allows them to operate continuously in extremely difficult environments.

The durability of the offer and possibilities of service options available after discontinuation of sales make them suitable for automation applications.

The "book" format and 24 V \pm power supply of Magelis BOX PCs means they can be easily installed in control system enclosures.

Optimized design with the Optimum range

The optimized design of Magelis Optimum Panel PC products provides a rugged, maintenance-free offer, certified for automation applications, at an attractive price. This range can be easily integrated into IT systems.

Magelis Optimum Panel PCs feature LCD TFT LED touch screens with 16 million colours and IP 65 front panel protection when mounted on a panel or an enclosure door and:

- 10.4" (SVGA 800 x 600) or 15" (XGA 1024 x 768) touch screen (1)
- Fanless Intel® Atom™ Z510 processor (1.1 GHz)
- Integrated SD card reader
- 3 USB ports including 1 on the front panel, 2 gigabit Ethernet ports, 1 communication port
- Windows® Embedded Standard 2009
- 24 V \pm power supply

(1) The 15" screens are available with an aluminium or stainless steel front panel bezel.

(2) A regularly updated list of all standards and certifications issued by independent bodies can be found on our website: www.schneider-electric.com.

(3) Depending on the model.



Magelis Panel PC Optimum range with 10.4" or 15" touch screen



Magelis Panel PC Universal and Performance ranges with 15" or 19" touch screen



Magelis BOX PC Universal and Performance ranges 1, 2 or 5 PCI slots

Presentation (continued)

Modular and flexible design with the Universal and Performance ranges

The modular design of Magelis iPCs allows us to provide a complete and coherent offer of referenced products with the Universal and Performance ranges. In addition, the flexibility offered by the modular design allows Magelis Panel PCs (see page 3/31) and Magelis BOX PCs (see page 3/42) to be made-to-order.

Configuration of the Universal and Performance ranges:

- Universal range based on the fanless Intel® Atom™ N270 processor (1.6 GHz)
- Performance range based on the fanless Intel® Core™ 2 Duo P8400 processor (2.26 GHz)
- Compact Flash card (SLC technology) ≥ 4 GB, Flash disk ≥ 60 GB, with 5 year warranty (1) or hard disk ≥ 250 GB, all interchangeable,
- 5 USB ports including 1 on the front panel and 2 gigabit Ethernet ports
- Up to 2 DVI ports and 3 communication ports
- DVD-RW drive depending on the model
- Different Microsoft operating systems (see page 3/13)
- Power supply: 24 V ~ (all models) and 100...240 V ~ (Panel PC only)

Magelis Universal and Performance Panel PCs feature LCD TFT LED touch screens with 16 million colours and IP 65 front panel protection when mounted on a panel or an enclosure door and:

- 15" (XGA 1024 x 760) (2) or 19" (SXGA 1280 x 1024) touch screen
- Option of having 2 PCI/PCIe slots

Magelis Universal and Performance BOX PC ranges have 1, 2 or 5 PCI/PCIe slots.

Vijeo Designer and Vijeo Citect bundle offer

Magelis iPCs are all supplied with the Vijeo Designer Run Time Demo software (21-day trial version). Vijeo Designer (version ≥ 6.1) includes the Pac Drive driver which enables Magelis iPCs to interact directly with motion controllers.

Magelis iPC and Vijeo Citect bundle offers include the DVD with the software and documentation, the USB key with registered user rights and a 1-year support contract. Updates and upgrades are available by providing the key number and subject to the usual conditions.

As Vijeo Citect applications require a large number of write operations to disk, these bundle offers are based on Magelis iPCs with Flash disk (SSD) to ensure long life and good performance. Vijeo Citect Web Client access is also available with Magelis iPCs that have a Compact Flash disk.

Magelis iPCs enable processing of Vijeo Designer data as they support its "Intelligent Data Service" option (to be installed on Compact Flash disk, minimum 4 GB, and Windows® Embedded Standard 2009 or later).

Magelis iPCs enable maintenance operations in automation environments as they support the "Build Time" configuration versions in Unity and SoMachine programming software. Magelis Performance iPCs (with minimum 2 GB of RAM) are recommended for these configurations.

Integration in IT structures

The 2 built-in Ethernet ports allow the IT and automation data flows to be separated, reinforcing the overall safety of the system. Magelis iPCs run on Microsoft operating systems, allowing:


- Connection of PC peripherals
- Huge data storage capacity
- Ease of connection to computers and databases
- Simultaneous operation of several programs:
 - Vijeo Designer Human/Machine Interface and data traceability with Intelligent Data Service
 - Vijeo Citect SCADA supervisor
 - Office software including web browsers
 - Other software installed by the user

Depending on the model, these operating systems may be:

- Windows® Embedded Standard 2009, write-protected in normal operating mode so as to avoid any unintended operation
- Windows® XP Professional SP3
- Windows® 7 Ultimate 64-bit supporting more than 3 GB of RAM (recommended for SCADA supervisor applications which need significant memory capacity)
- Windows® Embedded 7 and Windows® 7 Ultimate 32-bit which are also available in made-to-order configurations (see pages 3/31 and 3/42).

(1) For general conditions of manufacturer's 5 year warranty: please consult our Customer Care Centre.

(2) The 15" screens are available with an aluminium or stainless steel front panel bezel.

Type		Optimum range - 10.4" touch screen
Industrial environments		Maintenance-free (with Aluminium front panel bezel)
		
Fanless		★★★★★
Diskless		★★★★★
Screen	Type	10.4" LCD TFT LED touch screen
	Definition	SVGA 800 x 600, 16 million colours
	Degree of protection	IP 65 front panel protection when mounted on panel or enclosure door
	Front panel bezel material	Aluminum
CPU	Processor	Intel® ATOM™ Z510 (1.1 GHz)
	Storage	Operating system: Compact Flash card ≥ 2 GB (SLC technology) User: integrated SD card reader
	RAM (1)	1 GB
	Integrated ports	2 x Ethernet 10/100/1000 Mbps 1 x USB 2.0 (1 A) on the front panel + 2 x USB 2.0 (1 A) on the underside 1 x RS232C
Operating system		Windows® Embedded Standard 2009
Supply voltage	Voltage	24 V ~ (± 25%)
	Current	Nominal current 1.9 A. Typical inrush current 3 A, 50 A < 300 µs
Overall dimensions (W x H x D)/Cut-out (W x H)		323 x 260 x 72 mm/Cut-out: 303 x 243 mm
Temperature	During operation	0...50°C, conforming to IEC 61132-2, UL 508
Vibration resistance during operation	Continuous	1.75 mm amplitude from 2...9 Hz, 0.5 g from 9...200 Hz (2)
	Non-continuous	3.5 mm amplitude from 2...9 Hz, 1 g from 9...200 Hz (2)
	Merchant navy IACS E10	–
Shock resistance	during operation	15 g/11 ms conforming to IEC 60068-2-27 test Ea
Standards and certifications		CE, cULus (UL 508, CSA 22.2 n°142), cULus Haz Loc Class I Div 2 (ANSI/ISA 12.12.01, UL 1604, CSA 22.2 n°213), C-Tick, GOST
Marine certification	Germanischer Lloyd (Bridge Class)	–
ATEX certification		–
Software		Acrobat Reader, Word/Excel/Power Point Viewer, Framework.Net 3.5, Web browser Vijeo Designer Run Time Demo 21-day trial version (3) Vijeo Citect Web Client
References of Aluminium bezel versions	With Vijeo Designer Run Time Demo, 21-day version (3)	HMI PWC5 D0E01
References of Stainless steel bezel versions	With Vijeo Designer Run Time Demo, 21-day version (3)	–
Pages		3/17
Made-to-order configuration		See configured Magelis Panel PC on page 3/31

(1) Memory capacity not user-expandable; increased capacity available in made-to-order configuration (see page 3/31).

(2) Conforming to IEC 60068-2-6 Fc.

(3) Unlimited licence, to be ordered separately (VJDSNRTMPC).



Optimum range - 15" touch screen

Maintenance-free (with Aluminium or Stainless steel front panel bezel)



★★★★★
★★★★★

15" LCD TFT LED touch screen

XGA 1024 x 768, 16 million colours

IP 65 front panel protection when mounted on panel or enclosure door

Aluminium or Stainless steel

Intel® ATOM™ Z510 (1.1 GHz)

Operating system: Compact Flash card ≥ 2 GB (SLC technology)

User: integrated SD card reader

1 GB

2 x Ethernet 10/100/1000 Mbps

1 x USB 2.0 (1 A) on the front panel + 2 x USB 2.0 (1 A) at the bottom

1 x RS232C

Windows® Embedded Standard 2009

24 V \pm (± 25 %)

Nominal current 1.9 A. Typical inrush current 3 A, 50 A < 300 μ s

402 x 301 x 72 mm/Cut-out: 383.5 x 282.5 mm

0...50°C, conforming to IEC 61132-2, UL 508

1.75 mm amplitude from 2...9 Hz, 0.5 g from 9...200 Hz (2)

3.5 mm amplitude from 2...9 Hz, 1 g from 9...200 Hz (2)

1 mm from 3...13.2 Hz, 0.7 g from 13.2...100 Hz, 90 minutes endurance

15 g/11 ms conforming to IEC 60068-2-27 test Ea

□ CE, cULus (UL 508, CSA 22.2 n°142), cULus Haz Loc Class I Div 2 (ANSI/ISA 12.12.01, UL 1604, CSA 22.2 n°213), C-Tick, GOST

□ EN 1672-2 Food and beverage processing machines and FDA 21CFR 177.206 specific seals (Stainless steel bezel versions only)

With power supply filter HMI YLFI MAR11 (Aluminium bezel versions only)

ATEX II 3 Gas and Dust zone 22 (Stainless steel bezel versions only)

Acrobat Reader, Word/Excel/Power Point Viewer, Framework.Net 3.5, Web browser

Vijeo Designer Run Time Demo 21-day trial version (3)

Vijeo Citect Web Client

HMI PWC7 D0E01

HMI PVC7 D0E01

3/17


See configured Magelis Panel PC on page 3/31




More technical information on www.schneider-electric.com




10.4" and 15" Magelis PC Panel

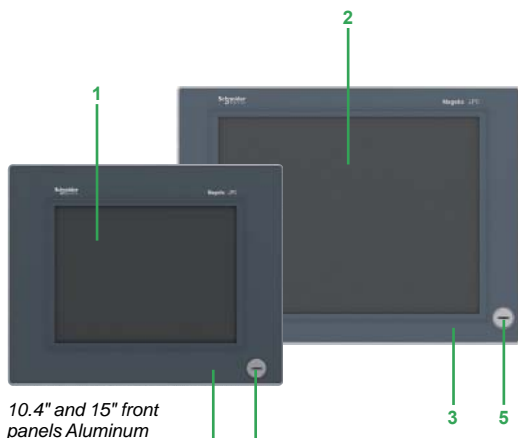


10.4" and 15" front panels Aluminum

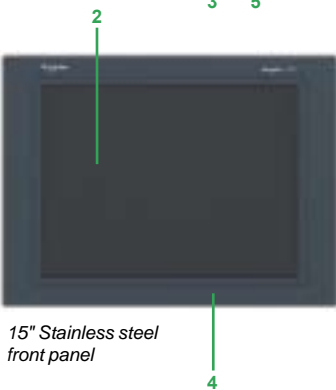

15" Stainless steel front panel

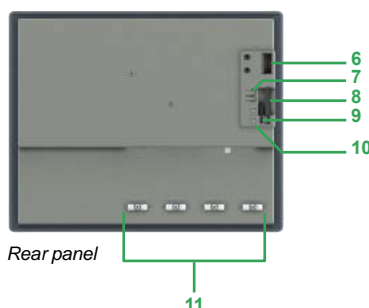

Rear panel



Underside

Presentation

The Magelis Panel PC Optimum range offers products that are rugged and certified for automation applications. These products, offering an optimized design at an attractive price, also feature compact dimensions, particularly in terms of depth. They can be easily integrated into IT systems.

This Magelis Panel PC Optimum range is specifically designed for use in maintenance-free environments. Versions are available with a stainless steel front panel bezel.

Overview of the Optimum range

Magelis Panel PC Optimum range

The Magelis Panel PC Optimum range is equipped with a fanless Intel® ATOM™ Z510 processor (1.1 GHz) and DDR2 RAM (1).

Available with 10.4" or 15" LCD TFT LED touch screen with 16 million colours, this range is specifically designed for maintenance-free environments (fanless, with a solid-state storage disk):

- HMI PWC5 D0E01 and HMI PWC7 D0E01:
 - IP 65 front panel protection when mounted on a panel or enclosure door
 - Compact Flash card (operating system)/integrated SD card reader (user data)/Windows® Embedded Standard 2009/24 V --- power supply, etc.

Made-to-order Magelis Panel PC Optimum range

On Magelis Optimum Panel PC bases, it is possible to customize the CPU by selecting the capacity of the RAM and the Compact Flash card. For this HMI PCCW offer see (page 3/31).

Description

10.4" (aluminium bezel) and 15" (aluminium or stainless steel bezel) Magelis Optimum Panel PC

Front panels

- 1 10.4" LCD TFT LED touch screen (SVGA 800 x 600) with 16 million colours for HMI PCW5 D0E01:
 - Brightness: 450 cd/m² (adjustable)
 - Type of touch panel: Analog resistive film, resolution 4096 x 4096
 - Typical viewing angle: 120° (vertically)/160° (horizontally)
 - 2 15" LCD TFT LED touch screen (XGA 1024 x 768) with 16 million colours for HMI PCW7 D0E01:
 - Brightness: 350 cd/m² (adjustable)
 - Type of touch panel: Analog resistive film, resolution 4096 x 4096
 - Typical viewing angle: 100° (vertically)/160° (horizontally)
 - 3 Aluminum alloy front panel providing IP 65 front panel protection when mounted on a panel or enclosure door; mounted on 1.6...10 mm thick support using screw fasteners supplied (2)
- or
- 4 Stainless steel 304 "Scotch Brite®" brushed finish front panel enabling an IP 65 degree of protection of the front panel when mounted on a panel or an enclosure door. Mounting on 1.6...10 mm thick support using stainless steel screw fasteners supplied (2). Cleaning simplified due to absence of USB port on front panel (conforms to food and beverage processing machines standard EN 1672-2). Version fitted with specific seals (standard FDA 21 CFR 177.206)
 - 5 USB 2.0 port (1 A max.) with screw-on protective cover (only available for Aluminium version); captive protective cover option also available (3)

Common rear panel

- 6 Battery
- 7 2 pushbuttons: 1 for the power supply and 1 for resetting
- 8 Compact Flash card (SLC technology) ≥ 2 GB specifically for the operating system
- 9 SD card reader for user data - SD card optional (3)
- 10 4 status and power supply LEDs
- 11 Cable clamps

Common underside

- 12 24 V ---/1.9 A power supply connector
- 13 2 USB 2.0 ports (1 A max.)
- 14 2 Ethernet 10/100/1000 Mbps ports
- 15 RS232C port

(1) Not user-expandable; increased capacity available in made-to-order configuration (see page 3/31).

(2) For installation, please refer to the "product data sheet" on our website www.schneider-electric.com.

(3) To be ordered separately (see page 3/30).

PF110317

HMI PWC5 D0E01
(screen side)
Magelis Optimum Panel PC - 10.4" or 15" LCD TFT LED touch screen (1)
(Intel® ATOM™ Z510 processor (1.1 GHz)/DDR2 RAM/24 V ~ supply voltage) (2)

Screen type	Operating system	Software	Storage	DDR2 RAM (3)	Reference	Weight kg
For maintenance-free environment (with Aluminium front panel bezel)						
10.4" LCD TFT LED touch screen SVGA 800 x 600, 16 million colours IP 65 front panel protection when mounted on a panel or enclosure door	Windows® Embedded Standard 2009 (4)	Vijeo Designer RT Demo (5)	Operating system: Compact Flash ≥ 2GB User: 1 SD memory card reader (card available separately)	1 GB	HMI PWC5 D0E01	4.400

PF110334

HMI PWC7 D0E01
(screen side)

15" LCD TFT LED touch screen XGA 1024 x 768, 16 million colours IP 65 front panel protection when mounted on a panel or enclosure door	Windows® Embedded Standard 2009 (4)	Vijeo Designer RT Demo (5)	Operating system: Compact Flash ≥ 2GB User: 1 SD memory card reader (card available separately)	1 GB	HMI PWC7 D0E01	6.100
--	-------------------------------------	----------------------------	---	------	-----------------------	-------

For maintenance-free environment (with Stainless steel front panel bezel)

15" LCD TFT LED touch screen XGA 1024 x 768, 16 million colours IP 65 front panel protection when mounted on a panel or enclosure door	Windows® Embedded Standard 2009 (4)	Vijeo Designer RT Demo (5)	Operating system: Compact Flash ≥ 2GB User: 1 SD memory card reader (card available separately)	1 GB	HMI PVC7 D0E01	6.300
--	-------------------------------------	----------------------------	---	------	-----------------------	-------

PF110331

HMI PWC● D0E01
(CPU side)

(1) For separate components, software and external power supply see page 3/30.

(2) For an ~ supply voltage, an external Phaseo power supply can be used (see page 3/30).

(3) Memory capacity not user-expandable; increased capacity available in made-to-order configuration (see page 3/31).

(4) Windows® Embedded Standard 2009 supplied in 9 languages (English, French, German, Italian, Portuguese, Spanish, Swedish, Chinese, Russian). Also includes:

- Acrobat Reader, Word/Excel/Power Point Viewer
- Framework.Net 3.5
- Web browser
- Vijeo Citect Web Client
- Vijeo Designer Run Time Demo (5)


(5) Vijeo Designer RT (Run Time) Demo (21-day trial version). Unlimited licence, to be ordered separately (VJDSNRTMPC) (see page 3/30).

Industrial PCs

Magelis™ iPCs certified for automation

Magelis™ Panel PC

Universal and Performance ranges with 15" touch screen

Type		Universal range - 15" touch screen (no PCI slot)		
Industrial environments		Maintenance-free (with Aluminium bezel)		Standard (with Aluminium bezel)
				
Fanless		★★★★★	★★★★★	★★★★★
Diskless		★★★★★	★★★★★	—
Screen	Type	15" LCD TFT LED touch screen		
	Definition	XGA 1024 x 768, 16 million colours		
	Degree of protection	IP 65 front panel protection when mounted on panel or enclosure door		
	Front panel bezel material	Aluminum		
CPU (1)	Processor	Intel® ATOM™ N270 (1.6 GHz)		
	PCI slot	—		
	Storage	Compact Flash card ≥ 4 GB (SLC technology)	Flash disk ≥ 60 GB with 5 year warranty (3)	Hard disk ≥ 250 GB
	RAM (2)	1 GB	HMI PUF7 ●0P01: 1 GB HMI PUF7 D0PL1: 2 GB	1GB
	Integrated DVD-RW drive	—		
	Slide-in rack for peripheral device	1 x slide-in compact rack for storage disk		
	Integrated ports	2 x Ethernet 10/100/1000 Mbps 1 x USB 2.0 (1 A) on the front panel + 4 x USB 2.0 (0.5 and 1 A) at the top 2 x RS232C/1 x DVI (VGA RGB adaptor, optional) 1 x RS232C/RS422/RS485 (option only available in made-to-order configuration) (1)		
	Optional ports	—		
	Optional RAID PCI card	—		
	Operating system		Windows® Embedded Standard 2009 Windows® XP Professional SP3	
Overall dimensions (W x H x D)/Cut-out (W x H)		402 x 301 x 104 mm/Cut-out: 383.5 x 282.5 mm		
Temperature	During operation	0...50°C, conforming to IEC 61132-2, UL 508		
Vibration resistance during operation	Continuous	1.75 mm amplitude from 2...9 Hz, 0.5 g from 9...200 Hz (conforming to IEC 60068-2-6 Fc)	0.125 g from 5...100 Hz	
	Non-continuous	3.5 mm amplitude from 2...9 Hz, 1 g from 9...200 Hz (conforming to IEC 60068-2-6 Fc)	0.250 g from 5...100 Hz	
	Merchant navy IACS E10	1 mm amplitude from 3...13.2 Hz, 0.7 g from 13.2...100 Hz, 90 minutes endurance	—	
Shock resistance	During operation	15 g/11 ms conforming to IEC 60068-2-27 test Ea		
Standards and certifications		CE, cULus (UL 508, CSA 22.2 n°142), cULus Haz Loc Class I Div 2 (ANSI/ISA 12.12.01, UL 1604, CSA 22.2 n°213), C-Tick, GOST		
Marine certif.	Germanischer Lloyd (Bridge Class)	24 V ~ equipped with a power supply filter HMI YLFI MAR11	—	
ATEX certification		—		
Software	Vijeo Designer Run Time Demo	21-day trial version. Unlimited licence, to be ordered separately (VJD SNRTMPC)		
References of Aluminium bezel versions (1)	24 V ~	HMI PUC7 D0E01	HMI PUF7 D0P01	HMI PUH7 D0P01
	24 V ~ Vijeo Citect Lite 1200 I/O	—	HMI PUF7 D0PL1	—
	24 V ~ Interface for battery	—	—	—
	24 V ~ Vijeo Citect Full 500 I/O	—	—	—
	100...240 V ~	—	HMI PUF7 A0P01	HMI PUH7 A0P01
	100...240 V ~ Vijeo Citect Full 500 I/O	—	—	—
References of Stainless steel bezel versions (1)	24 V ~	—	—	—
	100...240 V ~	—	—	—
Pages		3/26		
Made-to-order configuration		See configured Magelis Panel PC on page 3/31		

(1) Other options available (interface for backup battery, 3rd serial port, etc.) in made-to-order configuration (see page 3/31).

(2) Memory capacity not user-expandable; increased capacity available in made-to-order configuration (see page 3/31).



More technical information on www.schneider-electric.com

Universal range (2 PCI slots)		Performance range (no PCI slot)		Performance range (2 PCI slots)	
Maintenance-free (with Aluminium or Stainless steel bezel)	Standard (with Aluminium or Stainless steel bezel)	Harsh (with Aluminium bezel)	Standard (with Aluminium bezel)	Harsh (with Aluminium bezel)	Standard (with Aluminium or Stainless steel bezel)



★★★★★	★★★★★	—	—	—	—
★★★★★	—	★★★★★	—	★★★★★	—

15" LCD TFT LED touch screen					
XGA 1024 x 768, 16 million colours					
IP 65 front panel protection when mounted on panel or enclosure door					
Aluminium or Stainless steel		Aluminum			Aluminium or Stainless steel

Intel® ATOM™ N270 (1.6 GHz)		Intel® Core™ 2 Duo P8400 (2.26 GHz) + Intel® GM45 chipset			
2 (1 PCI + 1 PCI Express®)		–		2 (1 PCI + 1 PCI Express®)	
Flash disk ≥ 60 GB with 5 year warranty (3)	Hard disk ≥ 250 GB	Flash disk ≥ 60 GB with 5 year warranty (3)	Hard disk ≥ 250 GB	Flash disk ≥ 60 GB with 5 year warranty (3)	Hard disk ≥ 250 GB
HMI P●F7 A2P01: 1 GB HMI PUF7 A2PF1: 2 GB	1 GB	HMI PPF7 D0701: 2 GB HMI PPF7 D07F1: 4 GB	2 GB	HMI P●F7 A2701: 2 GB HMI PPF7 A27F1: 4 GB	2 GB
1		–		1	
1 x slide-in compact rack for storage disk (Flash disk or hard disk included)		1 x slide-in compact rack for storage disk		1 x slide-in compact rack for storage disk (Flash disk or hard disk included)	
1 x slide-in rack for DVD-RW drive (included) or storage disk via adaptor (optional)				1 x slide-in rack for DVD-RW drive (included) or storage disk via adaptor (optional)	
2 x Ethernet 10/100/1000 Mbps					
1 x USB 2.0 (1 A) on the front panel (only for aluminium bezel version) + 4 x USB 2.0 (0.5 and 1 A) at the top (for all models)					
2 x RS232C/1 x DVI (VGA RGB adaptor, optional)					
1 x RS232C/RS422/RS485 (option only available in made-to-order configuration) (1)					
RAID PCI card with 2 redundant hard disks		–		RAID PCI card with 2 redundant hard disks	

Windows® XP Professional SP3		Windows® 7 Ultimate 64-bit			
402 x 301 x 153 mm/Cut-out: 383.5 x 282.5 mm		402 x 301 x 119 mm/Cut-out: 383.5 x 282.5 mm		402 x 301 x 168 mm/Cut-out: 383.5 x 282.5 mm	

0...50°C, conforming to IEC 61132-2, UL 508					
1.75 mm from 2...9 Hz, 0.5 g from 9...200 Hz (4)	0.125 g from 5...100 Hz	1.75 mm from 2...9 Hz, 0.5 g from 9...200 Hz (4)	0.125 g from 5...100 Hz	1.75 mm from 2...9 Hz, 0.5 g from 9...200 Hz (4)	0.125 g from 5...100 Hz
3.5 mm from 2...9 Hz, 1 g from 9...200 Hz (4)	0.250 g from 5...100 Hz	3.5 mm from 2...9 Hz, 1 g from 9...200 Hz (4)	0.250 g from 5...100 Hz	3.5 mm from 2...9 Hz, 1 g from 9...200 Hz (4)	0.250 g from 5...100 Hz

15 g/11 ms conforming to IEC 60068-2-27 test Ea					
---	--	--	--	--	--

<input type="checkbox"/> CE, cULus (UL 508, CSA 22.2 n°142), cULus Haz Loc Class I Div 2 (ANSI/ISA 12.12.01, UL 1604, CSA 22.2 n°213), C-Tick, GOST <input type="checkbox"/> EN 1672-2 Food and beverage processing machines and FDA 21CFR 177.206 specific seals (Stainless steel bezel versions only)					
--	--	--	--	--	--

ATEX II 3 Gas and Dust zone 22 (Stainless steel bezel versions only)					
--	--	--	--	--	--

21-day trial version. Unlimited licence, to be ordered separately (VJD SNRTMPC)					
---	--	--	--	--	--

—	HMI PUH7 D2P01	HMI PPF7 D0701	HMI PPH7 D0701	—	HMI PPH7 D2701
—	—	—	—	—	—
—	—	—	—	—	HMI PPH7 B2701
—	—	HMI PPF7 D07F1	—	—	—
HMI PUF7 A2P01	HMI PUH7 A2P01	—	HMI PPH7 A0701	HMI PPF7 A2701	HMI PPH7 A2701
HMI PUF7 A2PF1	—	—	—	HMI PPF7 A27F1	—
HMI PTF7 D2P01	HMI PTH7 D2P01	—	—	—	—
—	—	—	—	—	HMI PRH7 A2701

3/26	3/27
------	------

See configured Magelis Panel PC on page 3/31	
--	--

(3) For general conditions of manufacturer's 5 year warranty: please consult our Customer Care Centre.

(4) Conforming to IEC 60068-2-6 Fc.



More technical information on www.schneider-electric.com

Industrial PCs

Magelis™ iPCs certified for automation

Magelis™ Panel PC

Universal and Performance ranges with 19" touch screen

Type	Universal range - 19" touch screen (no PCI slot)	
Industrial environments	Maintenance-free (with Aluminium bezel)	Standard (with Aluminium bezel)



Fanless		★★★★★	★★★★★	★★★★★
Diskless		★★★★★	★★★★★	—
Screen	Type	19" LCD TFT LED touch screen		
	Resolution	SXGA 1280 x 1024, 16 million colours		
	Degree of protection	IP 65 front panel protection when mounted on panel or enclosure door		
	Front panel bezel material	Aluminum		
CPU (1)	Processor	Intel® ATOM™ N270 (1.6 GHz)		
	PCI slot	—		
	Storage	Compact Flash card ≥ 4 GB (SLC technology)	Flash disk ≥ 60 GB with 5 year warranty (3)	Hard disk ≥ 250 GB
	RAM (2)	1 GB	HMI PUF9 D0P01: 1 GB HMI PUF9 D0PF1: 2 GB	1 GB
	Integrated DVD-RW drive	—		
	Slide-in rack for peripheral device	1 x slide-in compact rack for storage disk		
	Integrated ports	2 x Ethernet 10/100/1000 Mbps 1 x USB 2.0 (1 A) on the front panel + 4 x USB 2.0 (0.5 and 1 A) at the top 2 x RS232C/1 x DVI (VGA RGB adaptor, optional) 1 x RS232C/RS422/RS485 (option only available in made-to-order configuration) (1)		
	Optional ports (1)	—		
	Optional RAID PCI card	Windows® Embedded Standard 2009 Windows® XP Professional SP3		
	Operating system		Windows® XP Professional SP3	
Overall dimensions (W x H x D)/Cut-out (W x H)		480 x 380 x 114 mm/Cut-out: 459.5 x 359.5 mm		
Temperature	During operation	0...50°C, conforming to IEC 61132-2, UL 508		
Vibration resistance during operation	Continuous	1.75 mm amplitude from 2...9 Hz, 0.5 g from 9...200 Hz (3)	0.125 g from 5...100 Hz	
	Non-continuous	3.5 mm amplitude from 2...9 Hz, 1 g from 9...200 Hz (3)	0.250 g from 5...100 Hz	
	Merchant navy IACS E10	1 mm amplitude from 3...13.2 Hz, 0.7 g from 13.2...100 Hz, 90 minutes endurance	—	
Shock resistance	During operation	15 g/11 ms conforming to IEC 60068-2-27 test Ea		
Standards and certifications		CE, cULus (UL 508, CSA 22.2 n°142), cULus Haz Loc Class I Div 2 (ANSI/ISA 12.12.01, UL 1604, CSA 22.2 n°213), C-Tick, GOST		
Marine certification	Germanischer Lloyd (Bridge Class)	24 V ~ Magelis Panel PC equipped with a power supply filter HMI YLFI MAR11	—	
Software	Vijeo Designer Run Time Demo	21-day trial version. Unlimited licence, to be ordered separately (VJDSNRTMPC)		
References (1)	24 V ~	HMI PUC9 D0E01	HMI PUF9 D0P01	HMI PUH9 D0P01
	24 V ~ Vijeo Citect Lite 1200 I/O	—	—	—
	24 V ~ Vijeo Citect Full 500 I/O	—	HMI PUF9 D0PF1	—
	100...240 V ~	—	—	HMI PUH9 A0P01
	100...240 V ~ Vijeo Citect Full 500 I/O	—	—	—
Pages		3/28		
Made-to-order configuration		See configured Magelis Panel PC on page 3/31		

(1) Other options available (interface for backup battery, 3rd serial port, etc.) in made-to-order configuration (see page 3/31).

(2) Memory capacity not user-expandable; increased capacity available in made-to-order configuration (see page 3/31).



More technical information on www.schneider-electric.com

Universal range - 19" touch screen (2 PCI slots)		Performance range - 19" touch screen (no PCI slot)		Performance range - 19" touch screen (2 PCI slots)	
Maintenance-free (with Aluminium bezel)	Standard (with Aluminium bezel)	Harsh (with Aluminium bezel)	Standard (with Aluminium bezel)	Harsh (with Aluminium bezel)	Standard (with Aluminium bezel)



★★★★★	★★★★★	—	—	—	—
★★★★★	—	★★★★★	—	★★★★★	—

19" LCD TFT LED touch screen

SXGA 1280 x 1024, 16 million colours

IP 65 front panel protection when mounted on panel or enclosure door

Aluminum

Intel® ATOM™ N270 (1.6 GHz)		Intel® Core™ 2 Duo P8400 (2.26 GHz) + Intel® GM45 chipset			
2 (1 PCI + 1 PCI Express®)		–		2 (1 PCI + 1 PCI Express®)	
Flash disk ≥ 60 GB with 5 year warranty (3)	Hard disk ≥ 250 GB	Flash disk ≥ 60 GB with 5 year warranty (3)	Hard disk ≥ 250 GB	Flash disk ≥ 60 GB with 5 year warranty (3)	Hard disk ≥ 250 GB
HMI PUF9 A2P01: 1 GB HMI PUF9 A2PF1: 2 GB	1 GB	HMI PPF9 D0701: 2 GB HMI PPF9 D07F1: 4 GB	2 GB	HMI PPF9 A2701: 2 GB HMI PPF9 A27F1: 4 GB	2 GB
1		–		1	
1 x slide-in compact rack for storage disk (Flash disk or hard disk included) 1 x slide-in rack for DVD-RW drive (included) or storage disk via adaptor (optional)		1 x slide-in compact rack for storage disk		1 x slide-in compact rack for storage disk (Flash disk or hard disk included) 1 x slide-in rack for DVD-RW drive (included) or storage disk via adaptor (optional)	
2 x Ethernet 10/100/1000 Mbps					
1 x USB 2.0 (1 A) on the front panel + 4 x USB 2.0 (0.5 and 1 A) at the top					
2 x RS232C/1 x DVI (VGA RGB adaptor, optional)					
1 x RS232C/RS422/RS485 (option only available in made-to-order configuration) (1)					
RAID PCI card with 2 redundant hard disks		–		RAID PCI card with 2 redundant hard disks	
Windows® XP Professional SP3		Windows® 7 Ultimate 64-bit			
480 x 380 x 153 mm/Cut-out: 459.5 x 359.5 mm		480 x 380 x 129 mm/Cut-out: 459.5 x 359.5 mm		480 x 380 x 168 mm/Cut-out: 459.5 x 359.5 mm	
0...50°C, conforming to IEC 61132-2, UL 508					
1.75 mm from 2...9 Hz, 0.5 g from 9...200 Hz (4)	0.125 g from 5...100 Hz	1.75 mm from 2...9 Hz, 0.5 g from 9...200 Hz (4)	0.125 g from 5...100 Hz	1.75 mm from 2...9 Hz, 0.5 g from 9...200 Hz (4)	0.125 g from 5...100 Hz
3.5 mm from 2...9 Hz, 1 g from 9...200 Hz (4)	0.250 g from 5...100 Hz	3.5 mm from 2...9 Hz, 1 g from 9...200 Hz (4)	0.250 g from 5...100 Hz	3.5 mm from 2...9 Hz, 1 g from 9...200 Hz (4)	0.250 g from 5...100 Hz
–					
15 g/11 ms conforming to IEC 60068-2-27 test Ea					
CE, cULus (UL 508, CSA 22.2 n°142), cULus Haz Loc Class I Div 2 (ANSI/ISA 12.12.01, UL 1604, CSA 22.2 n°213), C-Tick, GOST					
–					

21-day trial version. Unlimited licence, to be ordered separately (VJDSNRTMPC)

—	HMI PUF9 D2P01	HMI PPF9 D0701	HMI PPH9 D0701	—	HMI PPH9 D2701
—	—	—	—	—	—
—	—	HMI PPF9 D07F1	—	—	—
HMI PUF9 A2P01	HMI PUF9 A2P01	—	HMI PPH9 A0701	HMI PPF9 A2701	HMI PPH9 A2701
HMI PUF9 A2PF1	—	—	—	HMI PPF9 A27F1	—
3/28		3/29			

See configured Magelis Panel PC on page 3/31

(3) For general conditions of manufacturer's 5 year warranty: please consult our Customer Care Centre.

(4) Conforming to IEC 60068-2-6 Fc.



More technical information on www.schneider-electric.com



Magelis Panel PC 15" and 19"

Presentation

The Magelis Panel PC Universal and Performance ranges offer products that are rugged and certified for automation applications.

Both ranges, available with 15" or 19" screen, are suitable for different types of use:

- In a maintenance-free environment
- In a harsh environment
- In a standard environment

The 15" screen Magelis Panel PC versions with a stainless steel front panel bezel and ATEX certification are particularly recommended for certain targeted sectors (food and beverage, chemical, pharmaceutical, gas and petroleum, etc.).

The modular design of the Panel PCs allows us to provide a complete and coherent offer of referenced products with the Universal and Performance ranges.

In addition to the referenced offer, the flexibility offered by the modular design allows Magelis Panel PCs to be made-to-order (see page 3/31).

Overview of the range

Magelis Panel PC Universal range (1) (2)

The Magelis Universal Panel PC is equipped with a fanless Intel® ATOM™ N270 processor (1.6 GHz) and DDR2 RAM (3).

Featuring a 15" or 19" LCD TFT LED 16 million colour touch screen and IP 65 front panel protection when mounted on a panel or enclosure door, this range is designed for the following environments:

- Maintenance-free (fanless, with solid-state storage disk):
 - HMI PUC7 D0E01 and HMI PUC9 D0E01:
 - No PCI slot
 - Compact Flash card/Windows® Embedded Standard 2009
 - 24 V $\overline{\text{---}}$ power supply
 - HMI PUF7 D0P01, HMI PUF7 D0PL1, HMI PUF7 A0P01, HMI PUF9 D0P01 and HMI PUF9 D0PF1:
 - No PCI slot
 - Flash disk/Windows® XP Professional SP3
 - 24 V $\overline{\text{---}}$ or 100...240 V \sim power supply
 - HMI PUF7 A2P01, HMI PUF7 A2PF1, HMI PUF9 A2P01 and HMI PUF9 A2PF1:
 - 1 PCI + 1 PCI Express®,
 - Flash disk/Windows® XP Professional SP3
 - 100...240 V \sim power supply
- Maintenance-free (fanless, with solid-state storage disk) and with Stainless steel front panel bezel:
 - HMI PTF7 D2P01:
 - 1 PCI + 1 PCI Express®,
 - Flash disk/Windows® XP Professional SP3
 - 24 V $\overline{\text{---}}$ power supply
- Standard industrial environments (with hard disk):
 - HMI PUH7 D0P01, HMI PUH7 A0P01, HMI PUH9 D0P01 and HMI PUH9 A0P01:
 - No PCI slot
 - Hard disk/Windows® XP Professional SP3
 - 24 V $\overline{\text{---}}$ or 100...240 V \sim power supply
 - HMI PUH7 D2P01, HMI PUH7 A2P01, HMI PUH9 D2P01 and HMI PUH9 A2P01:
 - 1 PCI + 1 PCI Express®,
 - Hard disk/Windows® XP Professional SP3
 - 24 V $\overline{\text{---}}$ or 100...240 V \sim power supply
- Standard industrial environments (with hard disk) and with Stainless steel front panel bezel:
 - HMI PTH7 D2P01:
 - 1 PCI + 1 PCI Express®,
 - Flash disk/Windows® XP Professional SP3
 - 24 V $\overline{\text{---}}$ power supply

(1) Types of PCI slot: Half-format PCI 2.2 and half-format PCI Express® 4x.

(2) For description, see pages 3/24 and 3/25.

(3) Not user-expandable; increased capacity available in made-to-order configuration (see page 3/31).

Presentation (continued)

Overview of the range (continued)

Magelis Panel PC Performance range (1) (2)

The Magelis Panel PC Performance range is equipped with the Intel® Core™ 2 Duo P8400 processor (2.26 GHz) + Intel® GM45 chipset and DDR3 RAM (3).

Featuring a 15" or 19" LCD TFT LED 16 million colour touch screen and IP 65 front panel protection when mounted on a panel or enclosure door, this range is designed for the following environments:

- Harsh industrial environments (with solid-state storage disk):
 - HMI PPF7 D0701, HMI PPF7 D07F1, HMI PPF9 D0701 and HMI PPF9 D07F1:
 - No PCI slot
 - Flash disk/Windows® 7 Ultimate 64-bit
 - 24 V $\overline{\text{---}}$ power supply
 - HMI PPF7 A2701, HMI PPF7 A27F1, HMI PPF9 A2701 and HMI PPF9 A27F1:
 - 1 PCI + 1 PCI Express®,
 - Flash disk/Windows® 7 Ultimate 64-bit
 - 100...240 V \sim power supply
- Standard industrial environments (with hard disk):
 - HMI PPH7 D0701, HMI PPH7 A0701, HMI PPH9 D0701 and HMI PPH9 A0701:
 - No PCI slot
 - Hard disk/Windows® 7 Ultimate 64-bit
 - 24 V $\overline{\text{---}}$ or 100...240 V \sim power supply
 - HMI PPH7 D2701, HMI PPH7 B2701 (4), HMI PPH7 A2701, HMI PPH9 D2701 and HMI PPH9 A2701:
 - 1 PCI + 1 PCI Express®,
 - Hard disk/Windows® 7 Ultimate 64-bit
 - 24 V $\overline{\text{---}}$ or 100...240 V \sim power supply
- Harsh industrial environments (with solid-state storage disk) and with Stainless steel front panel bezel:
 - HMI PRH7 A2701:
 - 1 PCI + PCI Express®
 - Hard disk/Windows® 7 Ultimate 64-bit
 - 100...240 V \sim power supply

Made-to-order Magelis Panel PC Universal and Performance ranges

On Magelis Universal and Performance Panel PC bases, it is possible to customize the CPU by selecting:

- The capacity of the Compact Flash card and the RAM
- The number of PCI and PCI Express® slots
- The operating system and dedicated HMI software
- Additional assembled options: PCI RAID card with 2 redundant hard disks (5), interface for backup battery, interface for battery-backed power supply module, third RS 485 port, etc.

For this HMIPCC offer see page 3/31.

(1) Types of PCI slot: Half-format PCI 2.2 and half-format PCI Express® 4x.

(2) For description, see pages 3/24 and 3/25.

(3) Not user-expandable; increased capacity available in made-to-order configuration (see page 3/31).


(4) Supplied with battery-backed interface module inserted.

(5) Operating temperature details available on our website www.schneider-electric.com.


3




15" and 19" front panels
Aluminum

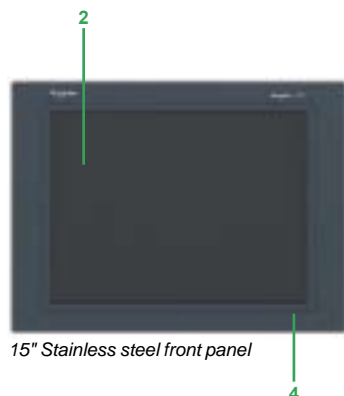

15" Stainless steel front panel



Rear panel



Underside

Magelis Panel PC, 15" or 19"

Description

Magelis Universal and Performance Panel PC:

15" (aluminium and stainless steel bezel) and 19" (aluminium bezel)

Front panels

- 1 15" LCD TFT LED touch screen, XGA 1024 x 768, 16 million colours for HMI P●●7 ●●●●●:
 - Brightness: 350 cd/m² (adjustable)
 - Type of touch panel: Analog resistive film, resolution 4096 x 4096
 - Typical viewing angle: 100° (vertically)/160° (horizontally)
- 2 19" LCD TFT LED touch screen, SXGA 1280 x 1024, 16 million colours for HMI P●●9 ●●●●●:
 - Brightness: 300 cd/m² (adjustable)
 - Type of touch panel: Analog resistive film, resolution 4096 x 4096
 - Typical viewing angle: 100° (vertically)/160° (horizontally)
- 3 Aluminum alloy front panel providing IP 65 front panel protection when mounted on a panel or enclosure door; mounted on 1.6...10 mm thick support using screw fasteners supplied (1)
- or
- 4 Stainless steel 304 "Scotch Brite®" brushed finish front panel enabling an IP 65 degree of protection of the front panel when mounted on a panel or an enclosure door. Mounting on 1.6...10 mm thick support using stainless steel screw fasteners supplied (1). Cleaning simplified due to absence of USB port on front panel (conforms to food and beverage processing machines standard EN 1672-2). Version fitted with specific seals (standard FDA 21 CFR 177.206)
- 5 USB 2.0 port (1 A max.) with screw-on protective cover (only available for Aluminium version); captive protective cover option also available (2)

Rear panel

- 6 Heat sink (1)
- 7 Connector for Panel PC 100...240 V ~/1.6 A power supply (Panel PC HMI ●●●● A●●●●) (3)
- 8 On/Off switch for 100...240 V ~ power supply (Panel PC HMI ●●●● A●●●●)

Underside


- 9 Fans (Panel PC HMI PP●● ●●●●●) (4)
Natural convection (Panel PC HMI PU●● ●●●●●) (1)

(1) For installation, please refer to the "product data sheet" on our website www.schneider-electric.com.


(2) To be ordered separately (see page 3/30).

(3) Consumption excluding additional PCI card.

(4) Can be replaced with the Panel PC fan kit by the customer (to be ordered separately, see page 3/30).




Side panel




Top panel

Magelis Panel PC, 15" or 19", no PCI slot



Side panel



Top panel

Magelis Panel PC, 15" or 19", 2 PCI slots

Description (continued)

Magelis Universal and Performance Panel PC, 15" and 19", no PCI slot

Side panel

- 1 4 status and power supply LEDs
- 2 2 pushbuttons: 1 for the power supply and 1 for resetting
- 3 Battery
- 4 Slot for Compact Flash card:
 - With Compact Flash card (SLC technology) ≥ 4GB (Panel PC **HMI PUC● D0E01**)
 - Free slot (Panel PC **HMI P●F● ●0●●1**, **HMI P●H● ●0●●1**)
- 5 Slide-in compact rack:
 - Free slot (Panel PC **HMI PUC● D0E01**)
 - With Flash disk ≥ 60 GB (Panel PC **HMI P●F● ●0●●1**) and manufacturer's 5 year warranty (1)
 - With hard disk ≥ 250 GB (Panel PC **HMI P●H● ●0●●1**)

Top panel

- 6 Free slot for battery-backed power supply interface module (2)
- 7 Micro input, line input/line output
- 8 Connector for Panel PC 24 V $\overline{\text{---}}$ /7 A power supply (Panel PC **HMI P●●● D0●●1**) (3)
- 9 2 RS232C ports
- 10 DVI port - RGB connection with adaptor (**HMI YAD DVI RGB 11**) (2)
- 11 2 Ethernet 10/100/1000 Mbps ports
- 12 2 USB 2.0 ports (1 A max.)
- 13 2 USB 2.0 ports (0.5 A max.)
- 14 Slot for additional RS232C/RS422/RS485 serial link interface; to be ordered separately in made-to-order configuration (2).

Magelis Universal and Performance Panel PC, 15" and 19", 2 PCI slots

Side panel

- 1 4 status and power supply LEDs
- 2 2 pushbuttons: 1 for the power supply and 1 for resetting
- 3 Battery
- 4 Free slot for Compact Flash card
- 5 Slide-in compact rack:
 - with Flash disk ≥ 60 GB (Panel PC **HMI P●F● ●●●●1**) and manufacturer's 5 year warranty (1)
 - With hard disk ≥ 250 GB (Panel PC **HMI P●H● ●2●●1**)
- 6 Slide-in rack with the DVD-RW drive included (4). Can be used for an additional storage disk with adaptor (**HMI YAD SLIDEIN 11**) (5)

Top panel

- 7 Slot for battery-backed power supply interface module:
 - Module mounted on Panel PC **HMI PPH7 B2701**
 - Module not included as standard on other models (2)
- 8 Micro input, line input/line output
- 9 Connector for Panel PC 24 V $\overline{\text{---}}$ /7 A power supply (Panel PC **HMI P●D● ●●●●1**) (3)
- 10 2 RS232C ports
- 11 DVI port - RGB connection with adaptor (**HMI YAD DVI RGB 11**) (2)
- 12 2 Ethernet 10/100/1000 Mbps ports
- 13 2 USB 2.0 ports (1 A max.)
- 14 2 USB 2.0 ports (0.5 A max.)
- 15 Half-format PCI Express® 4x slot
- 16 Half-format PCI 2.2 slot
- 17 Slot for additional RS232C/RS422/RS485 serial link interface; to be ordered separately in made-to-order configuration (2).

(1) For general conditions of manufacturer's 5 year warranty: please consult our Customer Care Centre.

(2) To be ordered separately in made-to-order configuration (see page 3/31).

(3) Consumption excluding additional PCI card.

(4) Operating temperature details available on our website www.schneider-electric.com.

(5) To be ordered separately as an accessory (see page 3/30).

Industrial PCs

Magelis™ iPCs certified for automation

Magelis™ Panel PC

Universal range - 15" touch screen

PF110314

HMI PU7 D0E01
(screen side)

PF110378

HMI PTF7 D2P01
HMI PTH7 D2P01
(screen side)

PF110341

HMI PU7 A0P01
(CPU side)

PF110327

HMI PU7 A2P01
(CPU side)

PF110340

HMI PUH7 D2P01
(CPU side)

Magelis Universal Panel PC - 15" LCD TFT LED touch screen (1) (2)

(Intel® ATOM™ N270 processor (1.6 GHz)/DDR2 RAM)

Supply voltage PCI slot	Operating system	Software	Storage	DDR2 RAM (3)	Reference	Weight kg
For maintenance-free environment (with Aluminium front panel bezel)						
24 V ~ No PCI slot	Windows® Embedded Standard 2009 (4)	Vijeo Designer RT Demo (5)	Compact Flash ≥ 4 GB	1 GB	HMI PUC7 D0E01	8.900
	Windows® XP Professional SP3	Vijeo Designer RT Demo (5)	Flash disk ≥ 60 GB with 5 year warranty (6)	1 GB	HMI PUF7 D0P01	9.000
		Vijeo Designer RT Demo (5) Vijeo Citect Lite 1200 I/O		2 GB	HMI PUF7 D0PL1	9.000
100...240 V ~ No PCI slot	Windows® XP Professional SP3	Vijeo Designer RT Demo (5)	Flash disk ≥ 60 GB with 5 year warranty (6)	1 GB	HMI PUF7 A0P01	9.500
100...240 V ~ 1 PCI + 1 PCI Express®	Windows® XP Professional SP3	Vijeo Designer RT Demo (5)	Flash disk ≥ 60 GB with 5 year warranty (6)	1 GB	HMI PUF7 A2P01	10.900
		Vijeo Designer RT Demo (5) Vijeo Citect Full 500 I/O	Flash disk ≥ 60 GB with 5 year warranty (6)	2 GB	HMI PUF7 A2PF1	10.900

For maintenance-free environment (with Stainless steel front panel bezel)

24 V ~ 1 PCI + 1 PCI Express®	Windows® XP Professional SP3	Vijeo Designer RT Demo (5)	Flash disk ≥ 60 GB with 5 year warranty (6)	1 GB	HMI PTF7 D2P01	11.100
-------------------------------------	---------------------------------	-------------------------------	--	------	----------------	--------

For standard industrial environment (with Aluminium front panel bezel)

24 V ~ No PCI slot	Windows® XP Professional SP3	Vijeo Designer RT Demo (5)	Hard disk ≥ 250 GB	1 GB	HMI PUH7 D0P01	9.000
24 V ~ 1 PCI + 1 PCI Express®	Windows® XP Professional SP3	Vijeo Designer RT Demo (5)	Hard disk ≥ 250 GB	1 GB	HMI PUH7 D2P01	10.300
100...240 V ~ No PCI slot	Windows® XP Professional SP3	Vijeo Designer RT Demo (5)	Hard disk ≥ 250 GB	1 GB	HMI PUH7 A0P01	9.500
100...240 V ~ 1 PCI + 1 PCI Express®	Windows® XP Professional SP3	Vijeo Designer RT Demo (5)	Hard disk ≥ 250 GB	1 GB	HMI PUH7 A2P01	10.900

For standard industrial environment (with Stainless steel front panel bezel)

24 V ~ 1 PCI + 1 PCI Express®	Windows® XP Professional SP3	Vijeo Designer RT Demo (5)	Hard disk ≥ 250 GB	1 GB	HMI PTH7 D2P01	11.100
-------------------------------------	---------------------------------	-------------------------------	--------------------	------	----------------	--------

(1) 15" touch screen: XGA 1024 x 768, 16 million colours, IP 65 front panel protection when mounted on panel or enclosure door.

(2) For separate components, software and external power supply see page 3/30.

(3) Memory capacity not user-expandable; increased capacity available in made-to-order configuration (see page 3/31).

(4) Windows® Embedded Standard 2009 supplied in 9 languages (English, French, German, Italian, Portuguese, Spanish, Swedish, Chinese, Russian). Also includes:

- Acrobat Reader, Word/Excel/Power Point Viewer
- Framework.Net 3.5
- Web browser
- Vijeo Citect Web Client
- Vijeo Designer Run Time Demo (5)

(5) Vijeo Designer RT (Run Time) Demo (21-day trial version). Unlimited licence, to be ordered separately (VJDSNRTMPC) (see page 3/30).

(6) For general conditions of manufacturer's 5 year warranty: please consult our Customer Care Centre.



HMI PP7 A0701
(screen side)



HMI PP7 A2701
(screen side)



HMI PP7 A0701
(CPU side)



HMI PP7 A2701
(CPU side)



HMI PPH7 D2701
(CPU side)

Magelis Performance Panel - 15" LCD TFT LED touch screen (1) (2)

(Intel® Core™ 2 Duo P8400 processor (2.26 GHz)/DDR3 RAM)

Supply voltage PCI slot	Operating system	Software	Storage	DDR3 RAM (3)	Reference	Weight kg
For harsh industrial environment (with Aluminium front panel bezel)						
24 V $\overline{\text{---}}$ No PCI slot	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo (4)	Flash disk ≥60 GB with 5 year warranty (5)	2 GB	HMI PPF7 D0701	10.100
		Vijeo Designer RT Demo (4) Vijeo Citect Full 500 I/O	Flash disk ≥60 GB with 5 year warranty (5)	4 GB	HMI PPF7 D07F1	10.100
100...240 V \sim 1 PCI + 1 PCI Express®	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo (4)	Flash disk ≥60 GB with 5 year warranty (5)	2 GB	HMI PPF7 A2701	12.000
		Vijeo Designer RT Demo (4) Vijeo Citect Full 500 I/O	Flash disk ≥60 GB with 5 year warranty (5)	4 GB	HMI PPF7 A27F1	12.000
For standard industrial environment (with Aluminium front panel bezel)						
24 V $\overline{\text{---}}$ No PCI slot	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo (4)	Hard disk ≥ 250 GB	2 GB	HMI PPH7 D0701	10.100
24 V $\overline{\text{---}}$ 1 PCI + 1 PCI Express®	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo (4)	Hard disk ≥ 250 GB	2 GB	HMI PPH7 D2701	11.400
24 V $\overline{\text{---}}$ with interface for backup battery 1 PCI + 1 PCI Express®	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo (4)	Hard disk ≥ 250 GB	2 GB	HMI PPH7 B2701	11.400
100...240 V \sim No PCI slot	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo (4)	Hard disk ≥ 250 GB	2 GB	HMI PPH7 A0701	10.600
100...240 V \sim 1 PCI + 1 PCI Express®	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo (4)	Hard disk ≥ 250 GB	2 GB	HMI PPH7 A2701	12.000
For standard industrial environment (with Stainless steel front panel bezel)						
100...240 V \sim 1 PCI + 1 PCI Express®	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo (4)	Hard disk ≥ 250 GB	2 GB	HMI PRH7 A2701	12.200

(1) 15" touch screen: XGA 1024 x 768, 16 million colours, IP 65 front panel protection when mounted on panel or enclosure door.

(2) For separate components, software and external power supply see page 3/30.

(3) Memory capacity not user-expandable; increased capacity available in made-to-order configuration (see page 3/31).

(4) Vijeo Designer RT (Run Time) Demo (21-day trial version). Unlimited licence, to be ordered separately (VJDSNRTMPC) (see page 3/30).

(5) For general conditions of manufacturer's 5 year warranty: please consult our Customer Care Centre.

PF110313

HMI PU9 D0E01
(screen side)

PF110326

HMI PU9 A2P01
(CPU side)

PF110343

HMI PUH9 D2P01
(CPU side)

PF110342

HMI PUH9 A0P01
(CPU side)**Magelis Universal Panel PC - 19" LCD TFT LED touch screen (1) (2)****(Intel® ATOM™ N270 processor (1.6 GHz)/DDR2 RAM)**

Supply voltage PCI slot	Operating system	Software	Storage	DDR2 RAM (3)	Reference	Weight kg
For maintenance-free environment (with Aluminium front panel bezel)						
24 V ~ No PCI slot	Windows® Embedded Standard 2009 (4)	Vijeo Designer RT Demo (5)	Compact Flash ≥ 4 GB	1 GB	HMI PUC9 D0E01	13.600
	Windows® XP Professional SP3	Vijeo Designer RT Demo (5)	Flash disk ≥ 60 GB with 5 year warranty (6)	1 GB	HMI PUF9 D0P01	13.700
		Vijeo Designer RT Demo (5) Vijeo Citect Full 500 I/O	Flash disk ≥ 60 GB with 5 year warranty (6)	2 GB	HMI PUF9 D0PF1	13.700
100...240 V ~ 1 PCI + 1 PCI Express®	Windows® XP Professional SP3	Vijeo Designer RT Demo (5)	Flash disk ≥ 60 GB with 5 year warranty (6)	1 GB	HMI PUF9 A2P01	14.700
		Vijeo Designer RT Demo (5) Vijeo Citect Full 500 I/O	Flash disk ≥ 60 GB with 5 year warranty (6)	2 GB	HMI PUF9 A2PF1	15.500

For standard industrial environment (with Aluminium front panel bezel)

24 V ~ No PCI slot	Windows® XP Professional SP3	Vijeo Designer RT Demo (5)	Hard disk ≥ 250 GB	1 GB	HMI PUH9 D0P01	13.700
24 V ~ 1 PCI + 1 PCI Express®	Windows® XP Professional SP3	Vijeo Designer RT Demo (5)	Hard disk ≥ 250 GB	1 GB	HMI PUH9 D2P01	15.000
100...240 V ~ No PCI slot	Windows® XP Professional SP3	Vijeo Designer RT Demo (5)	Hard disk ≥ 250 GB	1 GB	HMI PUH9 A0P01	14.300
100...240 V ~ 1 PCI + 1 PCI Express®	Windows® XP Professional SP3	Vijeo Designer RT Demo (5)	Hard disk ≥ 250 GB	1 GB	HMI PUH9 A2P01	15.500

(1) 19" touch screen: SXGA 1280 x 1024, 16 million colours, IP 65 front panel protection when mounted on panel or enclosure door.

(2) For separate components, software and external power supply see page 3/30.

(3) Memory capacity not user-expandable; increased capacity available in made-to-order configuration (see page 3/31).

(4) Windows® Embedded Standard 2009 supplied in 9 languages (English, French, German, Italian, Portuguese, Spanish, Swedish, Chinese, Russian). Also includes:

- Acrobat Reader, Word/Excel/Power Point Viewer
- Framework.Net 3.5
- Web browser
- Vijeo Citect Web Client
- Vijeo Designer Run Time Demo (5)

(5) Vijeo Designer RT (Run Time) Demo (21-day trial version). Unlimited licence, to be ordered separately (VJDSNRTMPC) (see page 3/30).

(6) For general conditions of manufacturer's 5 year warranty: please consult our Customer Care Centre.

PF110313

HMI PP9 A2701
(screen side)

PF110328

HMI PP9 A2701
(CPU side)

PF110343

HMI PPH9 D2701
(CPU side)

PF110342

HMI PPH9 A0701
(CPU side)**Magelis Performance Panel - 19" LCD TFT LED touch screen^{(1) (2)}****(Intel® Core™ 2 Duo P8400 processor (2.26 GHz)/DDR3 RAM)**

Supply voltage PCI slot	Operating system	Software	Storage	DDR3 RAM ⁽³⁾	Reference	Weight kg
For harsh industrial environment (with Aluminium front panel bezel)						
24 V ~ No PCI slot	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo ⁽⁴⁾	Flash disk ≥ 60 GB ⁽⁵⁾	2 GB	HMI PPF9 D0701	14.800
		Vijeo Designer RT Demo ⁽⁴⁾ Vijeo Citect Full 500 I/O	Flash disk ≥ 60 GB ⁽⁵⁾	4 GB	HMI PPF9 D07F1	14.800
100...240 V ~ 1 PCI + 1 PCI Express®	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo ⁽⁴⁾	Flash disk ≥ 60 GB ⁽⁵⁾	2 GB	HMI PPF9 A2701	16.600
		Vijeo Designer RT Demo ⁽⁴⁾ Vijeo Citect Full 500 I/O	Flash disk ≥ 60 GB ⁽⁵⁾	4 GB	HMI PPF9 A27F1	16.600

For standard industrial environment (with Aluminium front panel bezel)

24 V ~ No PCI slot	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo ⁽⁴⁾	Hard disk ≥ 250 GB	2 GB	HMI PPH9 D0701	14.800
24 V ~ 1 PCI + 1 PCI Express®	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo ⁽⁴⁾	Hard disk ≥ 250 GB	2 GB	HMI PPH9 D2701	16.100
100...240 V ~ No PCI slot	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo ⁽⁴⁾	Hard disk ≥ 250 GB	2 GB	HMI PPH9 A0701	15.400
100...240 V ~ 1 PCI + 1 PCI Express®	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo ⁽⁴⁾	Hard disk ≥ 250 GB	2 GB	HMI PPH9 A2701	16.500

⁽¹⁾ 19" touch screen: SXGA 1280 x 1024, 16 million colours, IP 65 front panel protection when mounted on panel or enclosure door.⁽²⁾ For separate components, software and external power supply see page 3/30.⁽³⁾ Memory capacity not user-expandable; increased capacity available in made-to-order configuration (see page 3/31).⁽⁴⁾ Vijeo Designer RT (Run Time) Demo (21-day trial version). Unlimited licence, to be ordered separately (VJDSNRTMPC) (see page 3/30).⁽⁵⁾ For general conditions of manufacturer's 5 year warranty: please consult our Customer Care Centre.

Separate components

Description	Details	Compatible with Magelis Panel PC ranges:			Reference	Weight kg
		Optimum	Universal	Performance		
Storage disks, peripheral equipment, kits						
Hard disk	250 GB, blank	—	All models		HMI YHDD 0250 11	—
Flash disk with 5 year warranty (1)	60 GB, blank	—	All models		HMI YSDD 0060 11	—
Compact Flash card (SLC technology)	2 GB, blank	All models			HMI YCF S02 11	—
	4 GB, blank	All models			HMI YCF S04 11	—
	8 GB, blank	All models			HMI YCF S08 11	—
SD memory card	4 GB, blank, for user data	All models	—		HMI ZSD 4G	—
DVD-RW drive for slide-in rack (2)	CD-RW and DVD-RW reader/writer	—	Panel PC with 2 PCI slots		HMI YDR DVDRW 11	—
Slide-in adaptor for storage disk	Used to insert a hard disk or an SSD Flash disk in a slide-in rack	—	Panel PC with 2 PCI slots		HMI YAD SLIDEIN 11	—
DVI/VGA RGB adaptor	For connecting an RGB screen to the integrated DVI port	—	All models		HMI YAD DVI RGB 11	—
RAID PCI card with 2 redundant hard disks (2)	PCI card equipped with two 250 GB redundant hard disks	—	Panel PC with 2 PCI slots		HMI YRAID PCI 11	—
Hard disk for RAID PCI card	Replacement hard disk for RAID PCI card HMI YRAID PCI 11	—	Panel PC with 2 PCI slots + RAID PCI card HMI YRAID PCI 11		HMI YRAID D0250 11	—
Backup power supply kit	Provides an uninterruptible power supply. Includes: ■ 1 backup battery ■ 1 x 3 m cordset	—	Configured Magelis Panel PC with battery-backed power supply interface module (3)		HMI YUPS KT 11	—
Power supply filter for marine certification	Necessary for compliance with marine certification.	Panel PC HMI PWC7 D0E01	Panel PC HMI PUC● D●●●●/ PUF● D●●●●	—	HMI YLFI MAR 11	—
Maintenance kit for Panel PC	Includes: ■ 1 x 3-way removable connector for 24 V ~ power supply ■ 1 x 3-way removable connector for 100...240 V ~ power supply ■ 2 protective covers for USB port on front panel (only on Aluminium bezel versions) ■ 10 replacement filters for fan, including: □ 5 for Magelis Panel PC with no PCI slot □ 5 for Magelis Panel PC with 2 PCI slots ■ 18 screw fasteners (Aluminium bezel) or 14 fasteners (Stainless steel bezel)	—	All models		HMI YPMKT 11	0.060
Captive USB protective cover	2 captive covers for USB port on front panel	All Aluminium bezel version models			HMI YPUSB UN5 11	0.040
Fan kit for Panel PC	For fan replacement by user	—	All models with no PCI slot		HMI YPFKT 01	0.250
			All models with 2 PCI slots		HMI YPFKT 21	0.800
Screen protection	5 protective film sheets for 10" screen	Panel PC HMI PWC5 D0E01	—		MPC YK2 0SPS KIT	—
	5 protective film sheets for 15" screen (Aluminium and Stainless steel bezel versions)	Panel PC HMI P●C7 D0E01	Panel PC HMI P●●7 ●●●●●		MPC YK5 0SPS KIT	—
	5 protective film sheets for 19" screen	—	Panel PC HMI P●●9 ●●●●●		MPC YK9 0SPS KIT	—
Cable for iDisplay	Extra long (10 m)	—	All models		HMI YCAB DVI1011	—
Software						
Vijeo Designer Run Time licence for 1 workstation	Converts the 21-day trial version of Vijeo Designer Run Time Demo to an unlimited licence	All models			VJDSNRTMPC	—
Licence extension Intelligent Data Service for Vijeo Designer Run Time for 1 workstation	Used to track the process variables and all operator actions, and offers visibility of the key process values	All models (requires storage capacity ≥ 4GB)			VJDSNTRCKV60M	—
External Phaseo power supply						
Phaseo regulated switch mode power supply ABL 8 Rail mounting	Input voltage: 100...120 V/200...500 V~ (4) Output voltage: 24 V ~ Power: 120 W	All models	—		ABL 8RPS24050 (5) (6)	0.700
Phaseo regulated switch mode power supply ABL 4 Rail mounting	Input voltage: 100...230 V~ (4) Output voltage: 24 V ~ Power: 120 W	All models	—		ABL 4RSM24050 (5) (6)	0.500

(1) For general conditions of manufacturer's 5 year warranty: please consult our Customer Care Centre.

(2) Operating temperature details available on our website www.schneider-electric.com.

(3) For configured Magelis Panel PC see page 3/31.

(4) Single-phase connection. Phase-to-phase connection possible on certain American line supplies, please consult our Customer Care Centre.

(5) If adding a PCI card, you need to select a Phaseo power supply with a power rating suitable for the extra consumption. Please consult the "Phaseo power supply and transformer" catalogue on our website www.schneider-electric.com.

(6) To order this reference, please consult our Customer Care Centre.

Configured Magelis Panel PC industrial PC

With the “configured iPC” service, Schneider Electric offers a vast number of configuration combinations for Magelis iPCs.

This service, available exclusively from our Customer Care Centre, allows users to configure a certified product suitable for specific automation applications and environments, based on Magelis Universal and Performance Panel PCs.

Our Customer Care Centre draws up:

- The complete parts list for the configured Magelis Panel PC
- Its selling price
- The complete reference (root + code which varies according to the configuration)
- A purchase order

Ordering procedure for a configured Magelis Panel PC

- 1 Please consult our Customer Care Centre.
- 2 State the reference root; this root will be completed with the variable part of the reference, once configuration is complete. The root varies depending on which Magelis Panel PC base is selected:
 - **HMI PCCW** corresponds to a configured Magelis Optimum Panel PC base, with an aluminium front panel
 - **HMI PCCV** corresponds to a configured Magelis Optimum Panel PC base, with a stainless steel front panel
 - **HMI PCCP** corresponds to a configured Magelis Universal or Performance Panel PC base, with an aluminium front panel
 - **HMI PCCT** corresponds to a configured Magelis Universal or Performance Panel PC base, with a stainless steel front panel.
- 3 Configure your Magelis Panel PC (see table below).
- 4 Confirm your order.

References				
Description	Magelis Panel PC base		Reference	Weight kg
Configured Magelis Panel PC The configuration should be made up from the components below. (1)	Reference root to be stated to our Customer Care Centre.	Optimum, aluminium front panel bezel	HMI PCCW (2)	—
		Optimum, stainless steel front panel bezel (15" screen only)	HMI PCCV (2)	—
		Universal and Performance, aluminium front panel bezel	HMI PCCP (2)	—
		Optimum and Performance, stainless steel front panel bezel (15" screen only)	HMI PCCT (2)	—
Description	Available on Magelis Panel PC base		Reference	Weight kg
	Optimum Processor Intel® ATOM™ Z510 (1.1 GHz) DDR2 RAM 24 V ~ power supply	Universal Processor Intel® ATOM™ N270 (1.6 GHz) DDR2 RAM 24 V ~ or 100...240 V ~ power supply	Performance Intel® Core™ 2 Duo P8400 processor (2.26 GHz) DDR3 RAM 24 V ~ or 100...240 V ~ power supply	
LCD TFT LED touch screen 16 million colours	10.4" or 15"	15" or 19"	(2)	—
RAM	2 GB max. (DDR2)	3 GB max. (DDR2)	8 GB max. (DDR3)	
Peripheral storage devices	Compact Flash card 8 GB max. (SLC technology)			
	Up to 2 Flash disks (3) ≥ 60 GB (SLC technology SSD)			
	Up to 2 hard disks ≥ 250 GB			
Other peripheral device	DVD-RW drive			
PCI slot configuration	No PCI slot			
	1 PCI + 1 PCI Express® or 2 PCI			
Operating systems	Windows® Embedded Standard 2009			
	Windows® Embedded Standard 7 32-bit			
	Windows® XP PRO SP3			
	Windows® 7 Ultimate 32-bit			
	Windows® 7 Ultimate 64-bit			
Software	Vijeo Designer Run Time			
	Vijeo Citect			
Assembled options	RAID PCI card with 2 redundant hard disks			
	Interface module for backup power supply required for the HMI YUPS KT 11 backup power supply kit (see page 3/30)			
	Additional RS232C/RS422/RS485 serial link interface			
	1 or 2 Ethernet ports	2 Ethernet ports		

1) Please consult our Customer Care Centre.

(2) The reference of configured Magelis Panel PC industrial PCs is made up of a root (HMI PCCW, HMI PCCV, HMI PCCP or HMI PCCT) followed by a variable part generated during configuration.

(3) Flash disk (SSD) with manufacturer's 5 year warranty. Please consult our Customer Care Centre.

Old PC Panels		Replaced by Magelis Panel PC		Compatibility	
Description	References	Description	References	Cut-out for flush mounting	Screen definition
Magelis Smart (with Compact Flash card)		Magelis Panel PC (Optimum or Universal range)			
Magelis Smart 8.4" screen, 24 V ---	MPC ST1 1NDJ 00T	Magelis Optimum Panel PC 10" screen, 24 V ---	HMI PWC5 D0E01		
Magelis Smart 8.4" screen, 100...240 V ~	MPC ST1 1NAJ 00T	Magelis Optimum Panel PC 10" screen, 24 V ---	HMI PWC5 D0E01 + Phaseo power supply (1)		
Magelis Smart 15" screen, 24 V ---	HMI PSC7 DE03 MPC ST5 2NDJ 20T	Magelis Optimum Panel PC 15" screen, 24 V ---	HMI PWC7 D0E01		
		Magelis Optimum Panel PC 15" screen, 24 V ---, ATEX	HMI PVC7 D0E01 HMI PCCT (3)		
		Magelis Universal Panel PC 15" screen, 24 V ---	HMI PUC7 D0E01		
Magelis Smart 15" screen, 100...240 V ~	HMI PSC7 AE03 MPC ST5 2NAJ 20T MPC ST5 2NAJ 20H	Magelis Optimum Panel PC 15" screen, 24 V ---	HMI PWC7 D0E01 + Phaseo power supply (1)		
		Magelis Universal Panel PC 15" screen, 24 V ---	HMI PUC7 D0E01 + Phaseo power supply (1)		
Magelis Smart+ (with Flash disk)		Magelis Panel PC (Universal range)			
Magelis Smart+ 15" screen, 24 V ---	HMI PSF7 DP03	Magelis Universal Panel PC 15" screen, 24 V ---	HMI PUF7 D0P01		
		Magelis Universal Panel PC 15" screen, 24 V ---, ATEX	HMI PTF7 D2P01		
Magelis Smart+ 15" screen, 100...240 V ~	HMI PSF7 AP03	Magelis Universal Panel PC 15" screen, 100...240 V ~	HMI PUF7 A0P01		
		Magelis Universal Panel PC 15" screen, 100...240 V ~, ATEX	HMI PCCT (3)		
Magelis Smart+ 15" screen, 100...240 V ~ Vijeo Citect Lite 1200 I/O	HMI PSF7 APL3 (2)	Magelis Universal Panel PC 15" screen, 24 V --- Vijeo Citect Lite 1200 I/O	HMI PUF7 D0PL1 (2)		
		Magelis Universal Panel PC 15" screen, 100...240 V ~, ATEX	HMI PCCT (3)		
Magelis Smart+ 15" screen, 100...240 V ~ Vijeo Citect Full 500 I/O	HMI PSF7 APF3	Magelis Universal Panel PC 15" screen, 100...240 V ~ Vijeo Citect Full 500 I/O	HMI PUF7 A2PF1		
		Magelis Universal Panel PC 15" screen, 100...240 V ~, ATEX	HMI PCCT (3)		
Magelis Compact iPC - General Purpose (with hard disk)		Magelis Panel PC (Universal range)			
Magelis Compact iPC - General Purpose 15" screen, 24 V ---	MPC KT5 5NDX 20N	Magelis Universal Panel PC 15" screen, 24 V ---	HMI PUH7 D2P01		
		Magelis Universal Panel PC 15" screen, 24 V ---, ATEX	HMI PTH7 D2P01		
Magelis Compact iPC General Purpose - 15" screen, 100...240 V ~	MPC KT5 5NAX 20N	Magelis Universal Panel PC 15" screen, 100...240 V ~	HMI PUH7 A2P01		
Magelis Compact iPC - Heavy Duty (with Flash disk)		Magelis Panel PC (Universal range)			
Magelis Compact iPC - Heavy Duty 15" screen, 100...240 V ~	MPC KT5 5MAX 20N	Magelis Universal Panel PC 15" screen, 100...240 V ~	HMI PUF7 A2P01		
Magelis Compact iPC - Heavy Duty 15" screen, 100...240 V ~ Vijeo Citect Lite 1200 I/O	MPC KT5 5MAX 20L	Magelis Universal Panel PC 15" screen, 100...240 V ~ Vijeo Citect Full 500 I/O	HMI PUF7 A2PF1		
		Configured Magelis Panel PC Universal Panel PC base with: ■ 15" screen, 100...240 V ~ ■ Vijeo Citect Lite 1200 I/O	HMI PCCP (3)		
Magelis Compact iPC - Heavy Duty 15" screen, 100...240 V ~ Vijeo Citect Full 500 I/O	MPC KT5 5MAX 20V	Magelis Universal Panel PC 15" screen, 100...240 V ~ Vijeo Citect Full 500 I/O	HMI PUF7A2PF1		
		Cut-out or screen definition	Identical		
			Different		

(1) ABL 8RPS24050 or ABL 4RSM24050 Phaseo power supply (see page 3/30).

(2) Correspondence between different power supplies: 100...240 V ~ / 24 V ---.

(3) Made-to-order configuration (see page 3/31).

Old Front Panels + Flex PC BOX		Replaced by Magelis iPC		Compatibility	
Description	References	Description	References (1)	Cut-out for flush mounting	Screen definition
Front Panels + Magelis Flex PC BOX		Magelis Panel PC or Magelis iDisplay + Magelis BOX PC			
Front Panel with 12" touch screen and keypad + Magelis Flex PC BOX 24 V $\overline{\text{---}}$ or 100...240 V \sim (2)	MPC YB2 0NNN 00N + MPC F/H●● ●●●● ●●	Magelis Optimum/Universal/ Performance Panel PC 15" touch screen, 24 V $\overline{\text{---}}$ or 100...240 V \sim	HMI P●●7 ●●●●● (3)		
		Magelis iDisplay with 15" screen, 100...240 V \sim + Magelis Universal/Performance BOX PC, 24 V $\overline{\text{---}}$	MPC YT5 0NAN 00N (3) + HMI B●●● ●●●●● (4)		
		Magelis iDisplay with 15" screen, 24 V $\overline{\text{---}}$ + Magelis Universal/Performance BOX PC, 24 V $\overline{\text{---}}$	HMI DID7 DT0 (3) + HMI B●●● ●●●●● (4)		
		Magelis iDisplay with 15" screen and keypad, 100...240 V \sim + Magelis Universal/Performance BOX PC, 24 V $\overline{\text{---}}$	MPC NB5 0NAN 00N + HMI B●●● ●●●●● (4)		
Front Panel with 15" touch screen + Magelis Flex PC BOX 24 V $\overline{\text{---}}$ or 100...240 V \sim (2)	MPC YT5 0NNN 00N + MPC F/H●● ●●●● ●●	Magelis Optimum/Universal/ Performance Panel PC 15" touch screen, 24 V $\overline{\text{---}}$ or 100...240 V \sim	HMI P●●7 ●●●●●		
		Magelis iDisplay with 15" screen, 100...240 V \sim + Magelis Universal/Performance BOX PC, 24 V $\overline{\text{---}}$	MPC YT5 0NAN 00N + HMI B●●● ●●●●● (4)		
		Magelis iDisplay with 15" screen, 24 V $\overline{\text{---}}$ + Magelis Universal/Performance BOX PC, 24 V $\overline{\text{---}}$	HMI DID7 DT0 + HMI B●●● ●●●●● (4)		
Front Panel with 15" touch screen and keypad + Magelis Flex PC BOX 24 V $\overline{\text{---}}$ or 100...240 V \sim (2)	MPC YB5 0NNN 00N + MPC F/H●● ●●●● ●●	Magelis iDisplay with 15" screen and keypad, 100...240 V \sim + Magelis Universal/Performance BOX PC, 24 V $\overline{\text{---}}$	MPC NB5 0NAN 00N + HMI B●●● ●●●●● (4)		
Front Panel with 19" touch screen + Magelis Flex PC BOX 24 V $\overline{\text{---}}$ or 100...240 V \sim (2)	MPC YT9 0NNN 00N + MPC F/H●● ●●●● ●●	Magelis Universal/Performance Panel PC 19" touch screen, 24 V $\overline{\text{---}}$ or 100...240 V \sim	HMI P●●9 ●●●●●		
		Magelis iDisplay with 19" screen, 100...240 V \sim + Magelis Universal/Performance BOX PC, 24 V $\overline{\text{---}}$	MPC YT9 0NAN 00N + HMI B●●● ●●●●● (4)		
				Cut-out or screen definition	Identical Different

(1) Complete references: Magelis Panel, see pages 3/17, 3/26 or 3/28 / Magelis iDisplay, see page 3/47 / Magelis BOX PC, see page 3/40.

(2) Power provided by the Magelis Flex PC BOX CPU; the type of power supply depends on the CPU model.

(3) Correspondence between different screen functions: touch screen + keypad/touch screen.

(4) Correspondence between possibly different power supplies: 100...240 V \sim /24 V $\overline{\text{---}}$.

Type
Industrial environments

Universal range - 1 PCI slot
Maintenance-free
Standard



Fanless
Diskless
CPU (1)
Processor
PCI slot
Storage
RAM (2)
Integrated DVD-RW drive
Slide-in rack for peripheral device
Integrated ports
Optional ports
Optional RAID PCI card

Operating system

Supply voltage
Voltage
Current (excluding PCI card)

Mounting
Overall dimensions (W x H x D in mm)

Temperature
during operation
Vibration
resistance
during operation
Non-continuous
Merchant navy IACS E10
Shock resistance
During operation

Standards and certifications

Marine certification
Germanischer Lloyd (Bridge Class)

Compatible screens

Software
Vijeo Designer Run Time Demo

References
Vijeo Designer Run Time Demo
Vijeo Citect Full 500 I/O
Vijeo Designer Run Time Demo

Pages

Made-to-order configuration

★★★★★
★★★★★

Intel® ATOM™ N270 (1.6 GHz)
1 PCI
Compact Flash card ≥ 4 GB (SLC technology)
Flash disk ≥ 60 GB with 5 year warranty (3)
Hard disk ≥ 250 GB
1 GB
HMI BUFN D1PF1: 2 GB
HMI BUFN D1P01: 1 GB
1 GB
–
1 x slide-in compact rack for storage disk
1 x slide-in compact rack for storage disk (Flash disk or hard disk included)
2 x Ethernet 10/100/1000 Mbps
1 x USB 2.0 (1 A) on the front panel + 4 x USB 2.0 (0.5 and 1 A) at the top
2 x RS232C
1 x DVI (VGA RGB adaptor, optional)
1 x RS232C/RS422/RS485
RAID PCI card with 2 redundant hard disks

Windows® Embedded Standard 2009
Windows® XP Professional SP3

24 V ~ (± 25%) (4)
Nominal current 6 A. Typical inrush current 7 A, 50 A < 300 µs

Vertical, at the back of the enclosure ("book" format) or flat (requiring fan kit HMI YBFT 11)
82 x 270 x 251

Conforming to IEC 61132-2, UL 508: 0...50°C (mounted vertically) or 0...45°C (mounted flat)
1.75 mm amplitude from 2...9 Hz, 0.5 g from 9...200Hz (5)
0.125 g from 5...100 Hz
3.5 mm amplitude from 2...9 Hz, 1 g from 9...200Hz (5)
0.250 g from 5...100 Hz
1 mm amplitude from 5...13.2 Hz, 0.7 g from 13.2...100Hz, 90 minutes endurance
–
15 g/11 ms conforming to IEC 60068-2-27 test Ea

CE, cULus (UL 508, CSA 22.2 n°142), cULus Haz Loc Class I Div 2 (ANSI/ISA 12.12.01, UL 1604, CSA 22.2 n°213), ATEX II 3 Dust zone 22, C-Tick, GOST
With power supply filter HMI YLFI MAR11
–

The whole range of Magelis iDisplay screens (see page 3/44)

Vijeo Designer Run Time Demo (21-day trial version). Unlimited licence, to be ordered separately (VJDSNRTMPC)

–
HMI BUFN D1PF1
–
HMI BUCN D1E01
HMI BUFN D1P01
HMI BUHN D1P01

3/40

See configured Magelis BOX PC on page 3/42
--

(1) Memory capacity not user-expandable; increased capacity available in made-to-order configuration (see page 3/42).

(2) For other available options (interface for backup battery, etc.) in made-to-order configuration, see pages 3/41 and 3/42.

(3) For general conditions of manufacturer's 5 year warranty: please consult our Customer Care Centre.



Universal range - 2 PCI slots		Performance range - 2 PCI slots		Performance range - 5 PCI slots	
Maintenance-free	Standard	Harsh	Standard	Harsh	Standard



★★★★★	★★★★★	—	—	—	—
★★★★★	—	★★★★★	—	★★★★★	—
Intel® ATOM™ N270 (1.6 GHz)		Intel® Core™ 2 Duo P8400 (2.26 GHz) + Intel® GM45 chipset			
2 (1 PCI + 1 PCI Express®)				5 (2 PCI + 3 PCI Express®)	
Flash disk ≥ 60 GB with 5 year warranty (3)	Hard disk ≥ 250 GB	Flash disk ≥ 60 GB with 5 year warranty (3)	Hard disk ≥ 250 GB	Flash disk ≥ 60 GB with 5 year warranty (3)	Hard disk ≥ 250 GB
HMI BUFN D2PF1: 2 GB	1 GB	HMI BPDF D27F1: 4 GB	2 GB	HMI BPDF D57F1: 4 GB	2 GB
HMI BUFN D2P01: 1 GB		HMI BPDF D2701: 2 GB		HMI BPDF D5701: 2 GB	
1					
1 x slide-in compact rack for storage disk (Flash disk or hard disk included)			1 x slide-in compact rack for storage disk (Flash disk or hard disk included)		
1 x slide-in rack for DVD-RW drive (included) or storage disk via adaptor (optional)			1 x slide-in rack for DVD-RW drive (supplied)		
			1 x slide-in rack for storage disk via adaptor (optional)		
2 x Ethernet 10/100/1000 Mbps					
1 x USB 2.0 (1 A) on the front panel + 4 x USB 2.0 (0.5 and 1 A) at the top					
2 x RS232C					
1 x DVI (VGA RGB adaptor, optional)					
1 x RS232C/RS422/RS485, 1 x DVI					
RAID PCI card with 2 redundant hard disks					
Windows® XP Professional SP3		Windows® 7 Ultimate 64-bit			
24 V ~ (± 25%) (4)					
Nominal current 6 A. Typical inrush current 7 A, 50 A < 300 µs					
Vertical, at the back of the enclosure ("book" format) or flat (requiring fan kit HMI YBFKT 21, for BOX PC HMI BU●N D2P●1)					
121 x 270 x 251		136 x 270 x 251		217 x 270 x 251	
Conforming to IEC 61132-2, UL 508: 0...50°C (mounted vertically) or 0...45°C (mounted flat)					
1.75 mm amplitude from 2...9 Hz, 0.5 g from 9...200Hz (5)	0.125 g from 5...100 Hz	1.75 mm amplitude from 2...9 Hz, 0.5 g from 9...200Hz (5)	0.125 g from 5...100 Hz	1.75 mm amplitude from 2...9 Hz, 0.5 g from 9...200Hz (5)	0.125 g from 5...100 Hz
3.5 mm amplitude from 2...9 Hz, 1 g from 9...200Hz (5)	0.250 g from 5...100 Hz	3.5 mm amplitude from 2...9 Hz, 1 g from 9...200Hz (5)	0.250 g from 5...100 Hz	3.5 mm amplitude from 2...9 Hz, 1 g from 9...200Hz (5)	0.250 g from 5...100 Hz
1 mm from 5...13.2 Hz, 0.7 g from 13.2...100Hz, 90 minutes endurance	—				
15 g/11 ms conforming to IEC 60068-2-27 test Ea					
CE, cULus (UL 508, CSA 22.2 n°142), cULus Haz Loc Class I Div 2 (ANSI/ISA 12.12.01, UL 1604, CSA 22.2 n°213), ATEX II 3 Dust zone 22, C-Tick, GOST					
With power supply filter HMI YLFI MAR11	—				
The whole range of Magelis iDisplay screens (see page 3/44)					
Vijeo Designer Run Time Demo (21-day trial version). Unlimited licence, to be ordered separately (VJDSNRTMPC)					
HMI BUFN D2PF1	—	HMI BPDF D27F1	—	HMI BPDF D57F1	—
HMI BUFN D2P01	HMI BUHN D2P01	HMI BPDF D2701	HMI BPHD D2701	HMI BPDF D5701	HMI BPHD D5701

3/40

See configured Magelis BOX PC on page 3/42

(4) For an ~ supply voltage, an external Phaseo power supply can be used (see page 3/41).

(5) Conforming to IEC 60068-2-6 Fc.

More technical information on www.schneider-electric.com

Industrial PCs

Magelis™ iPCs certified for automation

Magelis™ BOX PC

Universal and Performance ranges



Universal BOX PC
1 PCI



Universal BOX PC/Performance BOX PC
1 PCI + 1 PCI Express®



Performance BOX PC
2 PCI + 3 PCI Express®

Presentation

The Magelis BOX PC industrial PC offer includes products that are rugged and certified for automation applications.

With its Universal (1 or 2 PCI slots) and Performance (2 or 5 PCI slots) ranges, this Magelis BOX PC offer is suitable for all types of use that do not require an integrated screen:

- In a maintenance-free environment: Fanless Magelis BOX PC (unaffected by dust, no filters to clean, etc.) and without any rotating parts such as a hard disk. Data storage on Compact Flash card or on Flash disk offers good resistance to vibration and long life.
- In a harsh environment: Magelis BOX PC without hard disk
- In a standard environment: Magelis BOX PC with hard disk

In addition to the referenced offer, the flexibility offered by the modular design allows made-to-order configuration of the Magelis BOX PC (see page 3/42).

This offer is compatible with Magelis iDisplay screens (see page 3/44).

Overview of the range

Universal Magelis BOX PC range (1) (2)

The Universal BOX PC range is equipped with the fanless Intel® ATOM™ N270 processor (1.6 GHz) and DDR2 RAM (3).

It is specifically for the following environments:

- "Maintenance-free" (fanless, with solid-state storage disk):
 - HMI BUCN D1E01:
 - 1 PCI slot/Compact Flash card/Windows® Embedded Standard 2009, etc.
 - HMI BUFN D1P01 and HMI BUFN D1 PF1:
 - 1 PCI slot, Flash disk, Windows® XP Professional SP3, etc.
 - HMI BUFN D2P01 and HMI BUFN D2 PF1:
 - 1 PCI + 1 PCI Express® slot/Flash disk/Windows® XP Professional SP3, etc.
- Standard industrial environments (with hard disk):
 - HMI BUHN D1P01:
 - 1 PCI slot/hard disk/Windows® XP Professional SP3, etc.
 - HMI BUHN D2P01:
 - 1 PCI + 1 PCI Express® slot/hard disk/Windows® XP Professional SP3, etc.

Performance Magelis BOX PC range (1) (2)

The Performance BOX PC range is equipped with the Intel® Core™ 2 Duo P8400 processor (2.26 GHz) + Intel® GM45 chipset and DDR3 RAM (3).

It is specifically for the following environments:

- Harsh industrial environments (with solid-state storage disk):
 - HMI BPDF D2701 and HMI BPDF D27F1:
 - 1 PCI + 1 PCI Express® /Flash disk/Windows® 7 Ultimate 64-bit, etc.
 - HMI BPDF D5701 and HMI BPDF D57F1:
 - 2 PCI + 3 PCI Express® /Flash disk/Windows® 7 Ultimate 64-bit, etc.
- Standard industrial environments (with hard disk):
 - HMI BPHD D2701:
 - 1 PCI + 1 PCI Express® /hard disk/Windows® 7 Ultimate 64-bit, etc.
 - HMI BPHD D5701:
 - 2 PCI + 3 PCI Express® /hard disk/Windows® 7 Ultimate 64-bit, etc.

(1) Types of PCI slot: Half-format PCI 2.2 and half-format PCI Express® (1x for Magelis BOX PC 1 or 5 slots, 4x for Magelis BOX PC 2 slots).

(2) For description, see pages 3/38 and 3/39.

(3) Not user-expandable; increased capacity available in made-to-order configuration (see page 3/42).


Presentation (continued)
Overview of the range (continued)
Made-to-order Magelis BOX PC range (1)

On Universal and Performance Magelis BOX PC bases, it is possible to customize the CPU by selecting:


- The capacity of the Compact Flash card and the RAM
- The number of PCI and PCI Express® slots
- The operating system and dedicated HMI software
- Additional assembled options: PCI RAID card with 2 redundant hard disks (2), battery-backed power supply interface module, etc.

For this HMI PCCB1 offer see page 3/42.


(1) Types of PCI slot: Half-format PCI 2.2 and half-format PCI Express® (1x for Magelis BOX PC 1 or 5 slots, 4x for Magelis BOX PC 2 slots).
(2) Operating temperature details available on our website www.schneider-electric.com.

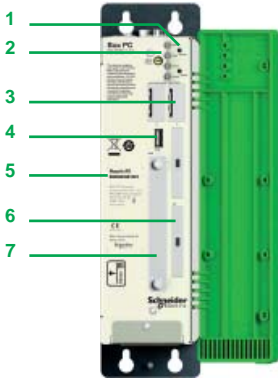


Front panel of Magelis BOX PC, door open
1 PCI slot

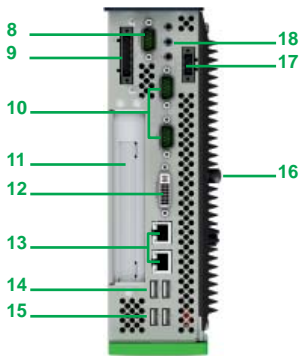

Top panel of Magelis BOX PC
1 PCI slot

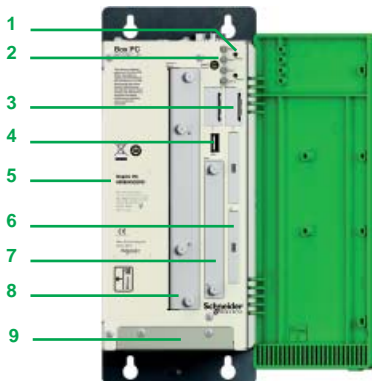

Front panel of Magelis BOX PC, door open
2 PCI slots

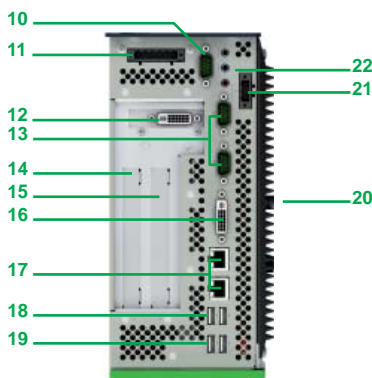

Top panel of Magelis BOX PC
2 PCI slots

Description

Universal Magelis BOX PC CPUs, 1 PCI slot

Front panel, door open

- 1 2 pushbuttons: 1 for the power supply and 1 for resetting
- 2 4 status and power supply LEDs, also visible with the front panel door closed
- 3 Battery
- 4 USB 2.0 port (1 A max.)
- 5 Identification (reference, serial number, etc.)
- 6 Slot for Compact Flash card:
 - With Compact Flash (SLC technology) \geq 4GB (BOX PC HMI BUCN D1E01)
 - Free slot (BOX PC HMI BUFN D1P●1, BOX PC HMI BUHN D1P01)
- 7 Slide-in compact rack:
 - Free slot (BOX PC HMI BUCN D1E01)
 - With Flash disk (1) (SLC technology SSD) \geq 60 GB (BOX PC HMI BUFN D1P●1)
 - With hard disk \geq 250 GB (BOX PC HMI BUHN D1P01)

Top panel

- 8 Free slot for additional RS232C/RS422/RS485 serial link interface (HMI YBIN SL 11) (2)
- 9 Free slot for battery-backed power supply interface module (3)
- 10 2 RS232C ports
- 11 Half-format PCI 2.2 slot
- 12 DVI port - RGB connection with adaptor (HMI YAD DVI RGB 11) (2)
- 13 2 Ethernet 10/100/1000 Mbps ports
- 14 2 USB 2.0 ports (0.5 A max.)
- 15 2 USB 2.0 ports (1 A max.)
- 16 Heat sink (4)
- 17 Connector for the CPU 24 V \pm /6 A power supply (5)
- 18 Micro input, line input/line output

Universal and Performance Magelis BOX PC CPUs, 2 PCI slots

Front panel, door open

- 1 2 pushbuttons: 1 for the power supply and 1 for resetting
- 2 4 status and power supply LEDs, also visible with the front panel door closed
- 3 Battery
- 4 USB 2.0 port (1 A max.)
- 5 Identification (reference, serial number, etc.)
- 6 Free slot for Compact Flash card
- 7 Slide-in compact rack:
 - With Flash disk (1) (SLC technology SSD) \geq 60 GB (BOX PC HMI B●F● D2●●1)
 - With hard disk \geq 250 GB (BOX PC HMI B●H● D2●01)
- 8 Slide-in rack with the DVD-RW drive included (6). Can be used for an additional storage disk with adaptor (HMI YAD SLIDEIN 11) (2)
- 9 Access to the fan filters (7) (BOX PC HMI BP●D D●7●1)

Top panel

- 10 Free slot for additional RS232C/RS422/RS485 serial link interface (HMI YBIN SL 11) (2)
- 11 Free slot for battery-backed power supply interface module (3)
- 12 Free slot for additional DVI interface (HMI YIN DVI RGB 11) (2)
- 13 2 RS232C ports
- 14 Half-format PCI Express® 4x slot
- 15 Half-format PCI 2.2 slot
- 16 DVI port - RGB connection with adaptor (HMI YAD DVI RGB 11) (2)
- 17 2 Ethernet 10/100/1000 Mbps ports
- 18 2 USB 2.0 ports (0.5 A max.)
- 19 2 USB 2.0 ports (1 A max.)
- 20 Heat sink (4)
- 21 Connector for the CPU 24 V \pm /6 A power supply (5)
- 22 Micro input, line input/line output

(1) Flash disk (SSD) with manufacturer's 5 year warranty. Please consult our Customer Care Centre.

(2) To be ordered separately (see page 3/41).


(3) To be ordered separately in made-to-order configuration (see page 3/42).

(4) For installation, please refer to the "product data sheet" on our website www.schneider-electric.com.


(5) Consumption excluding additional PCI card. For an \sim supply voltage, an external Phaseo power supply can be used (see page 3/41).

(6) Operating temperature details available on our website www.schneider-electric.com.

(7) Fans can be replaced by the user using the BOX PC fan kit (to be ordered separately, see page 3/41).

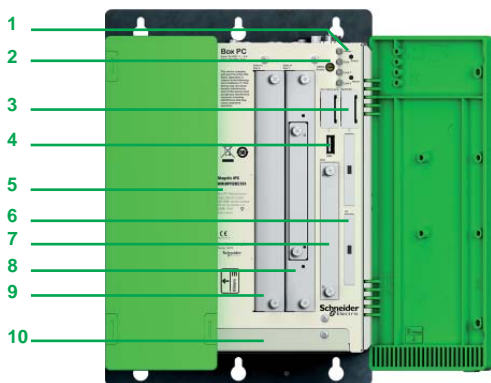

Front panel of Magelis BOX PC, door open
5 PCI slots

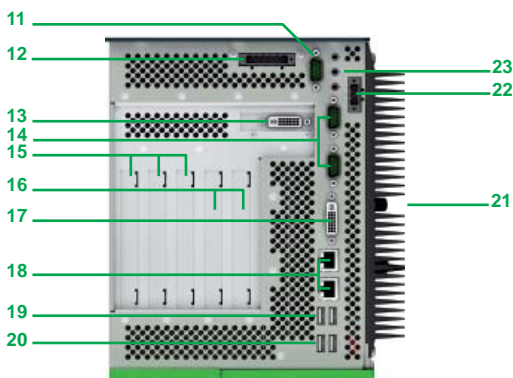

Top panel of Magelis BOX PC
5 PCI slots

Description (continued)

Performance Magelis BOX PC CPUs, 5 PCI slots

Front panel, door open

- 1 2 pushbuttons: 1 for the power supply and 1 for resetting
- 2 4 status and power supply LEDs, also visible with the front panel door closed
- 3 Battery
- 4 USB 2.0 port (1 A max.)
- 5 Identification (reference, serial number, etc.)
- 6 Free slot for Compact Flash card
- 7 Slide-in compact rack:
 - With Flash disk (1) (SLC technology SSD) ≥ 60 GB (BOX PC HMI BPDF D57●1)
 - With hard disk ≥ 250 GB (BOX PC HMI BPHD D5701)
- 8 Slide-in rack with the DVD-RW drive included (2)
- 9 Slide-in rack for additional storage disk with adaptor (HMI YAD SLIDEIN 11) (3)
- 10 Access to the fan filters (4)

Top panel

- 11 Free slot for additional RS232C/RS422/RS485 serial link interface (HMI YBIN SL 11) (3)
- 12 Free slot for battery-backed power supply interface module (5)
- 13 Free slot for additional DVI interface (HMI YIN DVI RGB 11) (3)
- 14 2 RS232C ports
- 15 3 half-format PCI Express® 1x slots
- 16 2 half-format PCI 2.2 slots
- 17 DVI port - RGB connection with adaptor (HMI YAD DVI RGB 11) (2)
- 18 2 Ethernet 10/100/1000 Mbps ports
- 19 2 USB 2.0 ports (0.5 A max.)
- 20 2 USB 2.0 ports (1 A max.)
- 21 Heat sink (6)
- 22 Connector for the CPU 24 V \sim /6 A power supply (7)
- 23 Micro input, line input/line output

(1) Flash disk (SSD) with manufacturer's 5 year warranty. Please consult our Customer Care Centre.

(2) Operating temperature details available on our website www.schneider-electric.com.

(3) To be ordered separately (see page 3/41).

(4) Fans can be replaced by the user using the BOX PC fan kit (to be ordered separately, see page 3/41).

(5) To be ordered separately in made-to-order configuration (see page 3/42).

(6) Refer to the installation precautions available on our website www.schneider-electric.com.

(7) Consumption excluding additional PCI card. For an \sim supply voltage, an external Phaseo power supply can be used (see page 3/41).

Industrial PCs

Magelis™ iPCs certified for automation


Magelis™ BOX PC

Universal and Performance ranges



HMI BU•N D1••1

3

HMI BU•N D2P•1
HMI BP•D D27•1

HMI BP•D D57•1

Universal Magelis BOX PC, 1 or 2 PCI slots

(Intel® ATOM™ N270 processor (1.6 GHz)/DDR2 RAM/24 V $\overline{\text{---}}$ supply voltage) (1)

PCI slot	Operating system	Software	Storage disk	DDR2 RAM (5)	Reference	Weight kg
For maintenance-free environment						
1 PCI	Windows® Embedded Standard 2009 (2)	Vijeo Designer RT Demo (3)	Compact Flash \geq 4 GB	1 GB	HMI BUCN D1E01	4.000
		Vijeo Designer RT Demo (3)	Flash disk \geq 60 GB with 5 year warranty (4)	1 GB	HMI BUFN D1P01	4.000
		Vijeo Designer RT Demo (3) Vijeo Citect Full 500 I/O	Flash disk \geq 60 GB with 5 year warranty (4)	2 GB	HMI BUFN D1PF1	4.000
1 PCI + 1 PCI Express®	Windows® XP Professional SP3	Vijeo Designer RT Demo (3)	Flash disk \geq 60 GB with 5 year warranty (4)	1 GB	HMI BUFN D2P01	5.000
		Vijeo Designer RT Demo (3) Vijeo Citect Full 500 I/O	Flash disk \geq 60 GB with 5 year warranty (4)	2 GB	HMI BUFN D2PF1	5.000

For standard industrial environment

1 PCI	Windows® XP Professional SP3	Vijeo Designer RT Demo (3)	Hard disk \geq 250 GB	1 GB	HMI BUHN D1P01	4.000
1 PCI + 1 PCI Express®	Windows® XP Professional SP3	Vijeo Designer RT Demo (3)	Hard disk \geq 250 GB	1 GB	HMI BUHN D2P01	5.000

Performance Magelis BOX PC, 2 or 5 PCI slots

(Intel® Core™ 2 Duo P8400 processor (2.26 GHz) / DDR3 RAM / 24 V $\overline{\text{---}}$ supply voltage) (1)

PCI slot	Operating system	Software	Storage disk	DDR3 RAM (5)	Reference	Weight kg
For standard industrial environment						
1 PCI + 1 PCI Express®	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo (3)	Hard disk \geq 250 GB	2 GB	HMI BPHD D2701	6.000
2 PCI + 3 PCI Express®	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo (3)	Hard disk \geq 250 GB	2 GB	HMI BPHD D5701	7.000
For harsh industrial environment						
1 PCI + 1 PCI Express®	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo (3)	Flash disk \geq 60 GB with 5 year warranty (4)	2 GB	HMI BPFD D2701	6.000
		Vijeo Designer RT Demo (3) Vijeo Citect Full 500 I/O	Flash disk \geq 60 GB with 5 year warranty (4)	4 GB	HMI BPFD D27F1	6.000
2 PCI + 3 PCI Express®	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo (3)	Flash disk \geq 60 GB with 5 year warranty (4)	2 GB	HMI BPFD D5701	7.000
		Vijeo Designer RT Demo (3) Vijeo Citect Full 500 I/O	Flash disk \geq 60 GB with 5 year warranty (4)	4 GB	HMI BPFD D57F1	7.000

(1) For an $\overline{\text{---}}$ supply voltage, an external Phaseo power supply can be used (see page 3/41).

(2) Windows® Embedded Standard 2009 supplied in 9 languages (English, French, German, Italian, Portuguese, Spanish, Swedish, Chinese, Russian). Also includes:

- Acrobat Reader, Word/Excel/Power Point Viewer
- Framework.Net 3.5
- Web browser
- Vijeo Citect Web Client
- Vijeo Designer Run Time Demo (3)

(3) Vijeo Designer RT (Run Time) Demo (21-day trial version). Unlimited licence, to be ordered separately (VJDSNRTMPC) (see page 3/41).

(4) For general conditions of manufacturer's 5 year warranty: please consult our Customer Care Centre.

(5) Memory capacity not user-expandable; increased capacity available in made-to-order configuration (see page 3/42).

Separate components					
Description	Details	Compatible with Magelis BOX PC ranges:		Reference	Weight kg
		Universal	Performance		
Storage disks, peripheral equipment, kits					
Hard disk	250 GB, blank	All models		HMI YHDD 0250 11	—
Flash disk with 5 year warranty (1)	60 GB, blank	All models		HMI YSDD 0060 11	—
Compact Flash card (SLC technology)	2 GB, blank	All models		HMI YCF S02 11	—
	4 GB, blank	All models		HMI YCF S04 11	—
	8 GB, blank	All models		HMI YCF S08 11	—
DVD-RW drive for slide-in rack (2)	CD-RW and DVD-RW reader/writer	BOX PC, 2 PCI and 5 PCI slots		HMI YDR DVDRW 11	—
Slide-in adaptor for storage disk	Used to insert a hard disk or an SSD Flash disk in a slide-in rack	BOX PC, 2 PCI and 5 PCI slots		HMI YAD SLIDEIN 11	—
Additional DVI interface	Provides a second DVI interface	BOX PC, 2 PCI and 5 PCI slots		HMI YIN DVI RGB 11	—
DVI/VGA RGB adaptor	For connecting an RGB screen to the integrated DVI port	All models		HMI YAD DVI RGB 11	—
RAID PCI card with 2 redundant hard disks (2)	PCI card equipped with two 250 GB redundant hard disks	All models		HMI YRAID PCI 11	—
Hard disk for RAID PCI card	Replacement hard disk for RAID PCI card HMI YRAID PCI 11	BOX PC + RAID PCI card HMI YRAID PCI 11		HMI YRAID D0250 11	—
Additional serial link interface	RS232C/RS422/RS485 serial link	All models		HMI YBIN SL 11	—
Backup power supply kit	Provides an uninterruptible power supply. Includes: ■ 1 backup battery ■ 1 x 3 m cordset	Magelis BOX PC configured with battery-backed power supply interface module (3)		HMI YUPS KT 11	—
Power supply filter for marine certification	Necessary for compliance with marine certification.	BOX PC: HMI BUCN D1E01 and HMI BUFN D●P●1	—	HMI YLFI MAR 11	—
Maintenance kit for BOX PC	Includes: ■ 1 x 3-way removable connector for 24 V ~ power supply ■ 15 replacement filters for fan, including: □ 5 for Magelis BOX PC - 1 PCI □ 5 for Magelis BOX PC - 2 PCI □ 5 for Magelis BOX PC - 5 PCI	All models		HMI YBMKT 11	—
Fan kit for BOX PC	Enables: ■ Replacement of fans by the user ■ Flat mounting of fanless Magelis BOX PC (4)	BOX PC, 1 PCI		HMI YBFKT 11	—
		BOX PC, 2 PCI		HMI YBFKT 21	—
		BOX PC, 5 PCI		HMI YBFKT 51	—
Software					
Vijeo Designer Run Time licence for 1 workstation	Converts the 21-day trial version of Vijeo Designer Run Time Demo to an unlimited licence.	All models		VJDSNRTPC	—
Intelligent Data Service licence extension for Vijeo Designer Run Time for 1 workstation	Used to track the process variables and all operator actions, and offers visibility of the key process values	All models (requires storage capacity ≥ 4 GB)		VJDSNTRCKV60M	—
External Phaseo power supply					
Phaseo regulated switch mode power supply ABL 8 Rail mounting	Input voltage: 100...120 V/200...500 V~ (5) Output voltage: 24 V ~ Power: 120 W	All models		ABL 8RPS24050 (6) (7)	0.700
Phaseo regulated switch mode power supply ABL 4 Rail mounting	Input voltage: 100...230 V ~ (5) Output voltage: 24 V ~ Power: 120 W	All models		ABL 4RSM24050 (6) (7)	0.500

(1) For general conditions of manufacturer's 5 year warranty: please consult our Customer Care Centre.

(2) Operating temperature details available on our website www.schneider-electric.com.

(3) For configured Magelis BOX PC see page 3/42.

(4) Operating temperature for flat mounting: 0...45°C (see pages 3/34 and 3/35).

(5) Single-phase connection. Phase-to-phase connection possible on certain American line supplies, please consult our Customer Care Centre.

(6) If adding a PCI card, you need to select a Phaseo power supply with a power rating suitable for the extra consumption. Please consult the "Phaseo power supply and transformer" catalogue on our website www.schneider-electric.com.

(7) To order this reference, please consult our Customer Care Centre.

Configured Magelis BOX PC industrial PC

With the “configured iPC” service, Schneider Electric offers a vast number of configuration combinations for Magelis iPCs.

This service, available exclusively from our Customer Care Centre, allows users to configure a certified product suitable for specific automation applications and environments, based on Universal and Performance Magelis BOX PCs.

Our Customer Care Centre draws up:

- The complete parts list for the configured Magelis BOX PC
- Its selling price
- The complete reference (root + code which varies according to the configuration)
- A purchase order

Ordering procedure for a configured Magelis BOX PC

- 1 Please consult our Customer Care Centre.
- 2 State the reference root **HMI PCCB1** corresponding to a request for a configured Magelis BOX PC. It will be completed with the variable part of the reference, once configuration is complete.
- 3 Configure your Magelis BOX PC (see table below).
- 4 Confirm your order.

References

Description	Reference	Weight kg
Configured Magelis BOX PC (1)	Reference root to be stated to our Customer Care Centre. The configuration should be made up from the components below. HMI PCCB1 (2)	—

Description	Available on Magelis BOX PC base		Reference	Weight kg
	Universal	Performance		
	Processor Intel® ATOM™ N270 (1.6 GHz)	Intel® Core™ 2 Duo P8400 processor (2.26 GHz)		
	DDR2 RAM	DDR3 RAM		
	Supply voltage 24 V ~ supply voltage	24 V ~ supply voltage		
RAM	3 GB max. (DDR2)	8 GB max. (DDR3)	(2)	—
Peripheral storage devices	Compact Flash card 8 GB max. (SLC technology)			
	Up to 2 Flash disks ≥ 60 GB with 5 year warranty (3)			
	Up to 2 hard disks ≥ 250 GB			
Other peripheral device	DVD-RW drive			
PCI slot configuration	1 PCI or 1 PCI Express®			
	1 PCI + 1 PCI Express® or 2 PCI			
	2 PCI + 3 PCI Express® or 4 PCI + 1 PCI Express®			
Operating systems	Windows® Embedded Standard 2009			
	Windows® Embedded Standard 7 32-bit			
	Windows® XP PRO SP3			
	Windows® 7 Ultimate 32-bit			
	Windows® 7 Ultimate 64-bit			
Software	Vijeo Designer Run Time			
	Vijeo Citect			
Assembled options	RAID PCI card with 2 redundant hard disks			
	Interface module for backup power supply required for the HMI YUPS KT 11 backup power supply kit (see page 3/41)			
	Additional RS232C/RS422/RS485 serial link interface			
	Additional DVI interface (needs a configuration with 2 or 5 PCI slots)			

(1) Please consult our Customer Care Centre.



(2) The reference of configured Magelis BOX PC industrial PCs is made up of a root (HMI PCCB1) followed by a variable part generated during configuration.

(3) For general conditions of manufacturer's 5 year warranty: please consult our Customer Care Centre.

Old industrial PCs		Replaced by Magelis BOX PCs	
Description	Reference	Description	References
Magelis Smart BOX		Magelis BOX PC (1 PCI slot)	
Magelis Smart BOX 100...240 V ~	MPC SN0 1NAJ 00T	Universal Magelis BOX PC	HMI BUCN D1E01 + Phaseo power supply (1)
Magelis Smart BOX 24 V ---	MPC SN0 1NDJ 00T	Universal Magelis BOX PC	HMI BUCN D1E01
Magelis Compact PC BOX (1 PCI slot)		Magelis BOX PC (1 PCI slot)	
Magelis Compact PC BOX 100...240 V ~	MPC KN0 2NAX 00N	Universal Magelis BOX PC	HMI BUHN D1P01 + Phaseo power supply (1)
Magelis Flex PC BOX F (2 PCI slots)		Magelis BOX PC (2 PCI slots)	
Magelis Flex PC BOX (Celeron M) 100...240 V ~	MPC FN0 2NAX 00N	Universal Magelis BOX PC	HMI BUHN D2P01 + Phaseo power supply (1)
Magelis Flex PC BOX (Celeron M) 24 V ---	MPC FN0 2NDX 00N	Universal Magelis BOX PC	HMI BUHN D2P01
Magelis Flex PC BOX (Core Duo) 100...240 V ~	MPC FN0 5NAX 00N	Performance Magelis BOX PC	HMI BPHD D2701 + Phaseo power supply (1)
Magelis Flex PC BOX (Core Duo) 24 V ---	MPC FN0 5NDX 00N	Performance Magelis BOX PC	HMI BPHD D2701
Magelis Flex PC BOX (Core Duo) 100...240 V ~	MPC FN0 5MAX 00N	Performance Magelis BOX PC	HMI BPDF D2701 + Phaseo power supply (1)
Magelis Flex PC BOX (Core Duo) 100...240 V ~ Vijeo Citect Full 500 I/O	MPC FN0 5MAX 00V	Performance Magelis BOX PC Vijeo Citect Full 500 I/O	HMI BPDF D27F1 + Phaseo power supply (1)
Magelis Flex PC BOX H (4 PCI slots)		Magelis BOX PC (5 PCI slots)	
Magelis Flex PC BOX (Celeron M) 100...240 V ~	MPC HN0 2NAX 00N	Performance Magelis BOX PC	HMI BPHD D5701
Magelis Flex PC BOX (Core Duo) 100...240 V ~	MPC HN0 5NAX 00N	Performance Magelis BOX PC	HMI BPHD D5701 + Phaseo power supply (1)
Magelis Flex PC BOX (Core Duo) 100...240 V ~ with backup battery	MPC HN0 5NBX 00N	Configured Magelis BOX PC (2)	HMI PCCB 1B5CB26K10N + kit HMI YUPS KT11 + Phaseo power supply (1)
Magelis Flex PC BOX (Core Duo) 24 V ---	MPC HN0 5NDX00N	Performance Magelis BOX PC	HMI BPHD D5701
Magelis Flex PC BOX (Core Duo) 100...240 V ~	MPC HN0 5MAX 00N	Performance Magelis BOX PC	HMI BPDF D5701 + Phaseo power supply (1)
Magelis Flex PC BOX (Core Duo) 100...240 V ~ Vijeo Citect Full 500 I/O	MPC HN0 5MAX 00V	Performance Magelis BOX PC Vijeo Citect Full 500 I/O	HMI BPDF D57F1 + Phaseo power supply (1)

(1) ABL 8RPS24050 or ABL 4RSM24050 Phaseo power supply (see page 3/41).

(2) See page 3/42.

Industrial PCs		Magelis iDisplay flat screens		
Model		15" touch screens	15" touch screen and keypad	
		<div></div>		
Screen	Type	15" colour TFT LCD		
	Definition	XGA 1024 x 768		
	Number of colours	16,777,216		
	Brightness	≥ 200 cd/m² adjustable		
	Backlighting service life	50,000 hours		
Touch screen		Analog resistive, 35 million cycles		
Keypad		–		70 standard IBM keys 2 x 20 user function keys
I/O ports	On the front panel	1 x USB 2.0 type A		
	Other	1 x VGA video (analog RGB, 15-way male SUB-D) 1 x DVI-D video (analog RGB, 24-way male DVI-D) 1 x USB 2.0 type B 1 x COM1 (RS 232C, 9-way male SUB-D)		
Standards and certifications		UL 508, CSA, IEC 61131-2	cULus Haz Loc Class I Div 2 (ANSI/ISA 12.12.01, UL 1604, CSA 22.2 n° 213)	UL 1604, UL 508, IEC 61131-2
Supply voltage		100...240 V ~ (98...264 V), according to EN 61131-2	24 V – (19,2...28,8 V)	100...240 V ~
Consumption		120 VA max.	17 A (typical inrush current 30 A max.)	200 VA max.
Degree of protection		IP 65 for the front of the screen IP 20 for the sides and back of the screen		
Dimensions	Overall dimensions (W x H x D)	395 x 294 x 60 mm		483 x 365 x 31 mm
	Cut-out (W x H)	383.5 x 282.5 (+1, -0) mm		441.5 x 313.5 (+1, -0) mm
Environment	Operating temperature	0...50°C, according to EN 61131-2 and UL		
	Vibration resistance	Conforming to JIS B 3501 and IEC 61131-2 standards: ■ 5...9 Hz, 3.5 mm fixed amplitude ■ 9...150 Hz: constant acceleration of 1 g (9.8 m/s²) ■ X, Y, Z directions tested 10 times (100 minutes)		
Type		MPC YT5 0NAN 00N	HMI DID 7DT0	MPC NB5 0NAN 00N
Pages		3/47		



Magelis iDisplay flat screens

19" touch screen



19" colour TFT LCD
 SVGA 1280 x 1024
 16,777,216
 $\geq 200 \text{ cd/m}^2$ adjustable
 50,000 hours
 Analog resistive, 35 million cycles

—

1 x USB 2.0 type A
 1 x VGA video (analog RGB, 15-way male SUB-D)
 1 x DVI-D video (analog RGB, 24-way male DVI-D)
 1 x USB 2.0 type B
 1 x COM1 (RS 232C, 9-way male SUB-D)

UL 508, CSA, IEC 61131-2

100...240 V ~ (85...265 V), according to EN 61131-2

200 VA max.

IP 65 for the front of the screen
 IP 20 for the sides and back of the screen

460 x 390 x 65 mm
 419.5 x 352.5 (+1, -0) mm

0...50°C, according to EN 61131-2 and UL

Conforming to JIS B 3501 and IEC 61131-2 standards:
 ■ 5...9 Hz, 3.5 mm fixed amplitude
 ■ 9...150 Hz: constant acceleration of 1 g (9.8 m/s²)
 ■ X, Y, Z directions tested 10 times (100 minutes)

MPC YT9 0NAN 00N

3/47



More technical information on www.schneider-electric.com

Industrial PCs

Magelis™ iDisplay screens certified for automation
15" and 19" flat screens



MPC YT5 0NAN 00N and HMI DID 7DT0



MPC NB5 0NAN 00N

Presentation

Magelis iDisplay screens are monitors with industrial flat screens designed for use in conjunction with PCs.

Two screen sizes are available: 15" and 19" to suit various types of requirements.

Featuring the latest TFT LCD technology, they offer top class viewing and extended service life. Their touch screen interface enables easy creation of user-friendly and high performance HMI interfaces.


The Magelis iDisplay screen **MPC NB5 0NAN 00N** also has a 70-key (standard IBM) keypad and user function keys (2 x 20 keys).

Certified in accordance with PLC product standards, designed for use in severe industrial environments and offering an excellent screen size/dimensions ratio, they can be installed easily on any machine and in any equipment. They are suitable for use in any type of environment.

15" Magelis iDisplay screens have the same cut-out dimensions as 15" Magelis Panel PCs, which makes it easy to upgrade installations.

Architecture

Magelis iDisplay screens are compatible with Magelis BOX PC industrial PCs.

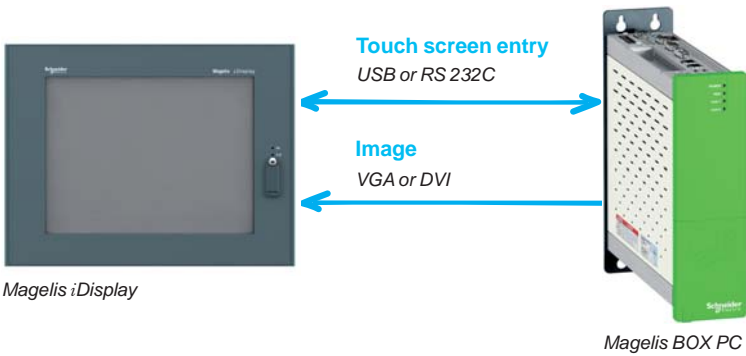

Industrial PCs

Magelis™ iDisplay screens certified for automation
15" and 19" flat screens

References					
Description	Screen	Interface	Supply voltage	Reference	Weight kg
Flat screen for flush mounting, IP 65 front panel	15", XGA (1024 x 768)	Touch	100...240 V ~	MPC YT5 0NAN 00N (1)	—
		Touch	24 V ---	HMI DID 7DT0 (2)	—
		Touch and keypad	100...240 V ~	MPC NB5 0NAN 00N (1)	—
	19", SXGA (1280 x 1024)	Touch	100...240 V ~	MPC YT9 0NAN 00N (1)	—

Separate parts				
Description	For		Reference	Weight kg
Maintenance kit: mounting brackets + seals	Magelis iPC 15"		MPC YK5 0MNT KIT	—
	Magelis iPC 19"		MPC YK9 0MNT KIT	—
Protective films for screen: 5 peel-off films	Magelis iPC 15"		MPC YK5 0SPS KIT	—
	Magelis iPC 19"		MPC YK9 0SPS KIT	—
Extra long cable (10 m) for connection with Magelis BOX PC and Magelis Panel PC industrial PCs	Magelis iPC 15" only		HMI CAB DVI1011	—

Mounting

Magelis iDisplay flat screens can be mounted on a panel or enclosure door using the fixing parts (3 x 4 spring clips) supplied with each screen.

- (1) Supplied with 3 m VGA cable
(2) Supplied with 5 m DVI-D cable

Configuration softwares

Selection guide page 4/2

■ **Vijeo Designer™ Lite**

 □ Presentation page 4/4

 □ Vijeo Designer Lite configuration software page 4/7

■ **Vijeo Designer™**

 □ Presentation page 4/8

 □ Vijeo Designer configuration software page 4/13

Applications

Traditional architecture, HMI executed on PC platform or dedicated terminal

Configuration software for operator dialogue applications



Compatible products

Type

Maximum number of targets

Operating system on terminals

Magelis™ XBT N/R/RT Small Panels (1)

1

Proprietary Magelis

Functions

Reading/writing of PLC variables

Display of variables

Data processing

Sharing of variables between HMI applications

Saving of variables to external database

Yes

Yes

–

–

–

Internationalization

–

Development of graphic applications

Native library of graphic objects

Curves and alarms

Scripts

Yes

Yes (2)

–

Communication between HMI application and PLCs

Via I/O drivers: Schneider Electric or third party protocols (Mitsubishi, Omron, Rockwell Automation, Siemens) (3)

Uploading of applications

Yes

Simulation of HMI applications

Yes

Recipe management

–

Report and barcode printing

–

Screen capture

–

Access security

Linked to user profiles

Interface languages

Screens, online help and documentation in electronic format available in 6 languages: English, French, German, Italian, Simplified Chinese and Spanish

OS compatibility

Windows XP Professional, Windows Vista Business (32-bit), Windows 2000 Professional

Software type

Vijeo Designer™ Lite

Page

4/7

(1) All Magelis XBT and Magelis GTO terminals behave transparently on restoration of power.

(2) Depending on compatible product.

(3) See protocols supported on page 4/6.

(4) See protocols supported on page 4/12.



More technical information on www.schneider-electric.com

Traditional architecture, HMI executed on PC platform or dedicated terminal

Configuration software for operator dialogue applications



Magelis™ STO/STU Small Panels
Magelis™ XBT GT/GK/GH/GTW and Magelis™ GTO Advanced Panels (1)
Magelis™ industrial PCs

32

Proprietary for Magelis STO/STU, Magelis XBT GT/GK/GH and Magelis GTO
Windows XP embedded for Magelis GTW

Yes, up to 8000 internal and external variables

Yes

Yes, using expression editor or Java programming

Up to 300 variables between 8 terminals, without router PLC
Proprietary protocol above TCP/IP

Yes, with the Intelligent Data Service extension

Up to 15 languages supported by 34 western alphabets, 4 Asian alphabets and 2 middle eastern alphabets embedded in the application

Yes

Yes, with log

Java

Via I/O drivers: Schneider Electric or third party protocols (Mitsubishi, Omron, Rockwell Automation, Siemens) (4)

Yes

Yes

Yes, up to 32 groups, 1024 ingredients for 256 recipes per group, proprietary or CSV format, complete multilingual support for labels and ingredients

On the fly alarms, log data. Up to 9999 active alarms, record or logs

Main barcode types supported: UPC-A, UPC-E, JAN/EAN8, JAN/EAN13, ITF, CODE39, CODE93, CODE128, CODABAR (NW-7)

Yes, for Magelis XBT GT (XBT GT 1105 and higher), Magelis GTO and Magelis industrial PCs. JPEG format

Linked to user profiles

Screens, online help and documentation in electronic format available in 7 languages: English, French, German, Italian, Brazilian Portuguese, Simplified Chinese and Spanish

Windows XP Professional, Windows 7 Business (32-bit and 64-bit)

Vijeo Designer™

4/13



More technical information on www.schneider-electric.com



Vijeo Designer Lite software

Presentation

Vijeo Designer™ Lite configuration software allows you to create operator dialogue applications for Magelis™ XBT N/R/RT Small Panels for controlling simple automation systems.

For operator dialogue terminals Magelis™ STO/STU Small Panels and Magelis™ GT/GTO/GK/GH/GTW Advanced Panels, refer to the Vijeo Designer configuration software on pages 4/8 to 4/10.

Vijeo Designer Lite has been designed with simplicity in mind and is inspired by the same user-friendly philosophy as Vijeo Designer. The primary aim of Vijeo Designer Lite is to show users who have not had any prior training how to create applications. It does this by adopting an intuitive approach to operation and providing advice in the form of wizards.

Vijeo Designer Lite is used to design page content in WYSIWYG (*What You See Is What You Get*) format: everything created using this software is displayed in exactly the same way as it appears on the dialogue terminal screen.

Since Vijeo Designer Lite is capable of simultaneously defining, within the same project, as many versions in different languages as the terminal's memory can support, users have the option of internationalizing their applications.

The interface and documentation for Vijeo Designer Lite are available in 6 languages: English, French, German, Italian, Simplified Chinese and Spanish.

Since applications created with Vijeo Designer Lite are independent of the communication protocol used, the same application can be used with the various PLCs offered by the major suppliers.

Vijeo Designer Lite works on compatible PCs with Windows 2000, XP or Vista operating software.

Configuration

With Vijeo Designer Lite configuration software, operator dialogue applications can be developed quickly and easily using its very simple and user-friendly tools.

The development environment has two main windows:

- Application browser: This is a logical guide to designing applications. All project-related information can be clearly displayed at any time.
- Dialogue view: This displays the contextual information for the selection made in the application browser. This information is arranged on a tab.

Vijeo Designer Lite applications have different types of pages:


- Application pages, which can be interlinked
- Alarm pages
- Preconfigured system pages

Pages can contain text or bitmaps, as well as all kinds of variables and graphic objects.


Applications can be configured without dialogue boxes. Instead of dialogue boxes, preconfigured lists of parameters are available to help users make their selections and avoid errors.

Vijeo Designer Lite comes with a toolset:

- Graphics editor
- Library of pictograms and symbols
- Editor for linking to PLC variables
- Simulator
- Application printing

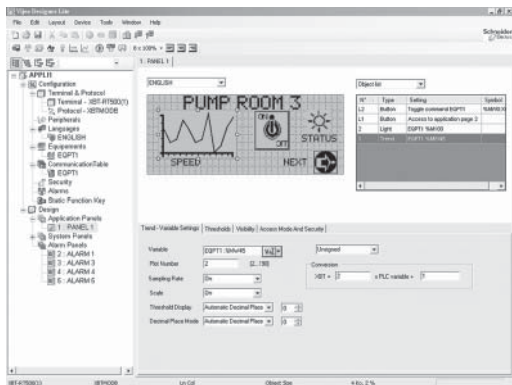

Example project

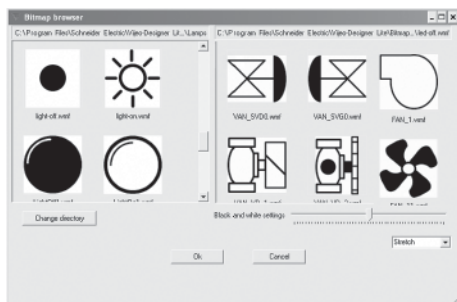

Symbols library

Graphics editor


The graphics editor in Vijeo Designer Lite makes it easy for developers of operator dialogue applications to create pages based on objects:

- Point, line, rectangle, ellipse
- Text and image
- Graphic, trending curve, button, light
- Enumerated list and scrolling text

Symbols library

The symbols library makes the process of creating pages more efficient. It contains pictograms which are easily recognizable within industrial contexts as well as drawings of the main components used in automation.

With Vijeo Designer Lite, linking of these graphic symbols to the function keys of the terminal is instantaneous.

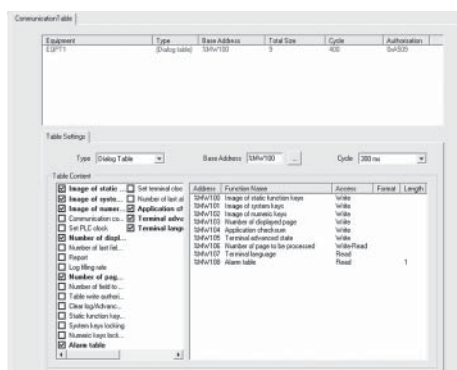

Communication table

Links with PLC variables

Vijeo Designer Lite also enables the user to easily link symbols with the internal variables of Schneider Electric PLCs by importing Twido Soft, PL7 and Concept automation database files.

Communication table

The communication table in Vijeo Designer Lite provides the user with an easy way of configuring all data exchanged between the Magelis compact XBT terminal and the main device.

The communication table is also used to define:

- Access to data: read/write
- All the alarm conditions


Simulator

Vijeo Designer Lite makes it possible to simulate the entire operator dialogue application at design office level without using a Magelis compact terminal or a PLC. The simulator program can be used to thoroughly check the following application characteristics:

- Navigation between pages
- Entry of variable data
- Display of variables
- Display of alarms

Application printing

You can print all or part of the HMI application using the Vijeo Designer Lite print function. It is possible to send the data to a printer or to print to file.

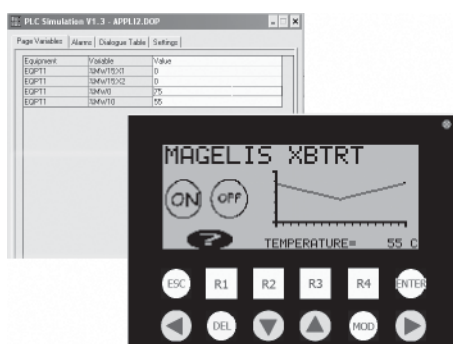

Simulation

Protocols for communication between the HMI application and the PLCs

Communication between the operator dialogue application and the connected control equipment is established using a communication protocol (driver), which is selected when creating the application in Vijeo Designer Lite.

Schneider Electric protocols

Vijeo Designer Lite supports the following Schneider Electric protocols:

- Modbus RTU Master/Slave
- Unitelway
- Zelio Logic

Third-party protocols

Vijeo Designer Lite supports the following third-party protocols:

- Mitsubishi:
 - Melsec FX protocol (CPU)
- Omron:
 - Sysmac protocols
- Rockwell Automation:
 - Allen Bradley protocols: DF1-Full Duplex, RS DataHighway 485
- Siemens:
 - Simatic PPI protocols



VJD SUD TMS V13M

References

Licences for the Vijeo Designer Lite configuration software listed below consist of a CD-ROM containing:

- Vijeo Designer Lite V1.3 software
- User documentation in electronic format
- The communication protocols described on page 4/6
- XBT L1001 development software for converting existing XBT applications

Single-station licences

Description	Licence type	Application transfer cable		Reference	Weight kg
		PC side port	Magelis terminal side		
Vijeo Designer Lite configuration software	Single (1 station)	–	– (1)	VJD SND TMS V13M	0.125
		USB	Magelis XBT N/R/RT (2)	VJD SUD TMS V13M	0.675

(1) References for application transfer cables (PC to Magelis XBT N/R/RT terminal) are listed under “Connection to PCs and printers” on page 1/24.

(2) USB cable for PC TSX CUSB 485 connection and XBT adaptor for USB cable XBT Z925 included (see page 1/24).



Vijeo Designer software

Presentation

The cross-platform Vijeo Designer™ configuration software can be used to create operator dialogue applications for controlling automation systems for:

- Magelis™ STO and STU terminals (Vijeo Designer Limited Edition is sufficient)
- Magelis™ GTO terminals
- Magelis™ XBT GT and XBT GK terminals
- Magelis™ XBT GH portable terminals
- Magelis™ GTW open terminals
- Magelis™ industrial PCs Panel PC and BOX PC

Note: For semi-graphic terminals Magelis XBT N/R/RT, please refer to the Vijeo Designer Lite development software. **Magelis XBT G terminals are no longer supported.**

Vijeo Designer and a suitable terminal can be combined to provide a solution for each and every control station requirement, at the cost of a simple software reconfiguration.

Capable of supporting video image streaming, the Magelis Vijeo Designer offer provides access to new types of application. Users can view their process instantly or subject to a delay, on the same screen as the HMI dialogue.

Vijeo Designer uses Magelis Ethernet TCP/IP connectivity and is, therefore, able to support WEB Gate remote access, the sharing of application data between terminals, the transfer of recipes and logs for variables, and much more.

Applications can take on an international nature, because Vijeo Designer supports up to 15 languages simultaneously in one project (40 alphabets are available on the Magelis GT/GTO/GK terminal). The interface and documentation for Vijeo Designer are available in 7 languages: English, French, German, Italian, Brazilian Portuguese, Simplified Chinese and Spanish.

Vijeo Designer is the HMI component of SoMachine. Vijeo Designer will run on any PC with Windows XP Professional or Windows 7. It supports WYSIWYG simulation (1) of the developed application (without the target Magelis GT/GTO/GK/GTW terminal or Magelis iPC), simulation of the PLC variables (I/O, internal bits and words) and ensures that the application runs in total security on the Magelis GT/GTO/GK/GTW terminal or Magelis industrial PC.

Configuration

Vijeo Designer configuration software enables operator dialogue projects to be processed quickly and easily thanks to its advanced ergonomics using up to 5 configurable windows:

- 1 Browser window
- 2 Object List window
- 3 Recipes window
- 4 Library of Animated Graphic Objects and Image Objects window
- 5 Report window


The software also offers a complete set of application management tools for:


- Project creation, whereby a project comprises one or a number of applications for Magelis GT/GTO/GK/GTW, Panel PC and PC BOX with sharing of variables between terminals (up to 8 terminals and 300 variables)
- Recipe management (32 groups of 256 recipes with up to 1024 ingredients)
- Cross-referencing of application variables
- Documentation of views for an application
- A full simulation mode for testing the application from the design office
- Bar code reader management via:
 - USB port on multifunction XBT GT terminals, Magelis GT/GTO/GK/GTW keypad terminals and Magelis industrial PCs
 - COM1 or COM2 serial port on Magelis GT/GK/GTW (2)
- USB keyboard and mouse support for all terminals incorporating a USB port (only one peripheral can be connected at any one time)
- Retrieval of symbol files for PLC variables generated by TwidoSuite, PL7, Concept, ProWORX 32 and Unity Pro software (3)
- Report printing
- Barcode printing

(1) What You See Is What You Get (on the screen of the target terminal).
 (2) Except XBT GT11 terminals.
 (3) DDT structured types and "unlocated" variables are supported.



Example project

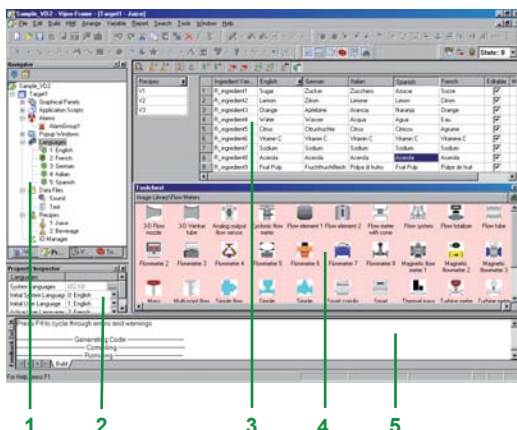

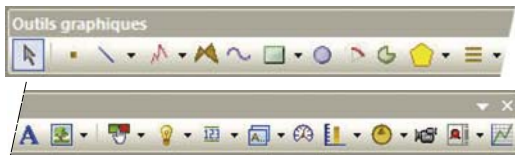


Graphic toolbar

Graphics editor

The graphics editor in Vijeo Designer offers interface consistency for simple objects as well as for more sophisticated ones. It enables application developers to create views easily based on:

- Simple objects to be configured:
 - points, lines, rectangles, ellipses, arcs
 - bar graphs, meters, tanks, fillers, pie charts, curves
 - polylines, polygons, regular polygons, Bézier curves, scales
 - texts, images or alarm summary, etc.
- Preconfigured advanced objects: switches, radio buttons, indicators, buttons, tanks, bar graphs, potentiometers, selector switches, text or number fields, enumerated lists, etc.
- Screen masks and skeletons for type applications



Object animation example

Object animations

8 types of graphic-object animation support the rapid creation of animated mimics on the basis of:

- Pressing the touch panel
- Change of color
- Filling
- Movement
- Rotation
- Size
- Visibility
- Display of associated value

Library of animated graphic objects

The library of animated graphic objects makes the creation of mimics very efficient thanks to the numerous “ready-made” animation objects. It includes more than 4000 2-D and 3-D “industrial” vector images. Simply “drag and drop” the object using the mouse to position it on the mimic being created.

User-defined objects can be added to this library using the same simple “drag and drop” method.



Library of animated graphic objects

Java scripts

Vijeo Designer supports data processing using Java language scripts. This function facilitates the running of complex animations, the automation of tasks within the terminal and the management of calculations in order to relieve the load on the PLC programs.

The scripts (50 lines, max.) can be associated with:

- Variables
- Operator actions
- Screens
- The application itself

User-customizable resources

To enable applications to be customized in accordance with customer requirements, Vijeo Designer features a new resource concept that makes it possible to define styles (colours, images, character fonts, text lists).


To quickly customize a generic application to meet customer requirements, simply assign these styles to the objects concerned.

The resource concept is supported by the following native objects: *Meter*, *Bar Graph*, *Slider*, *Potentiometer*, *Selector*, *Text List* and *Image List*.

```
//Script Created: 10/09/2001
//
// Description:
//
// Replace this line with your script
int pos;

if (movebottles.getValue() != 0) // If conveyor is OFF, do not move bottles
{
    pos = BottlePos.getValue();
    if (pos >= 1000)
        pos = 0;
    pos = pos + 10 * 2 * ConveyorSpeed.getValue();
    BottlePos.write(pos);
}
```

Java script example

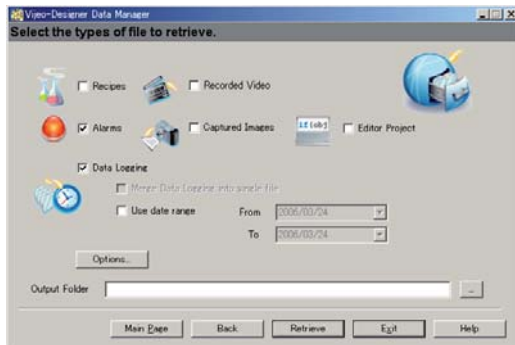

Data Manager: Transfer recipes, videos, images, etc. via Ethernet or USB, by simply clicking the mouse

Advanced functions

Based on new information technologies, Vijeo Designer features a large number of advanced functions for processing a higher volume of data, both faster and more reliably:

- Multimedia data management in the most popular formats:
 - image display (jpeg, bmp, emf and png files)
 - text display and processing (txt files)
 - sound message processing (wav files)
- Alarm or curve logs recorded
- Zoom in/out function on trending curves for a detailed analysis
- Alarm management. All variables can be categorized as "Alarms" and can be customized in respect of visualization and acknowledgment. These Boolean and analogue threshold type alarms can be printed on the fly.
- Multimode application transfer: via serial link, USB, Ethernet and Compact Flash memory card (on multifunction terminals)
- Backup of application source files on the terminal or iPC to facilitate maintenance
- User-friendly data exchange between PC and terminal using the Data Manager tool
- Integrated FTP server for downloading/uploading recipes via Ethernet TCP/IP and restoring logs to Magelis GT/GTO/GK/GTW and Magelis iPC
- Multiport communication for multifunction terminals, 2 serial links and 1 Ethernet network can be active simultaneously
- Action table for associating a particular behavior with an event
- Use of a USB memory stick (up to 4 GB) for application downloads/uploads, data retrieval or recipe exchange
- E-mail on action and event (the e-mail text can contain up to 1000 characters)

4



Alarm management

WEB Gate remote connection

Vijeo Designer supports a WEB Gate remote connection with any platform which has an Ethernet connection point.

WEB Gate supports remote visualization of Vijeo Designer applications with Internet Explorer on any PC running Windows XP or Windows 7. The size of the page displayed is determined by the terminal.

WEB Gate supports the display of pages similar to those in the Vijeo Designer application, or of different pages, i.e. startup pages and navigation pages can be differentiated in order to indicate the type of access (terminal/WEB Gate).

Several connections are possible at the same time, with the number depending on the size of the application.

The high security mode of WEB Gate excludes any risk of applications jamming as a result of variables being modified via the terminal and WEB Gate at the same time.

For increased confidentiality:


- WEB Gate access can be restricted to only those PCs whose IP address appears in the licensing list.
- Some Vijeo Designer functions are not supported by WEB Gate:
 - application shutdown, restart
 - terminal configuration
 - reading of an acoustic animation (sound file)
 - display a recorded video sequence

WEB Maintenance remote diagnostics

In addition to WEB Gate, Vijeo Designer features the embedded diagnostics service WEB Maintenance - Transparent Ready WEB Server Class B15 (1). This server's navigation bar features an option for accessing the following functions:

- WEB Gate
- Animation tables
- Web interface for retrieving data files (recipes, logs, multimedia files)

Note: Terminals programmed using Vijeo Designer can be accessed directly via their names. This function is supported by the DHCP and DNS network services.



Report printing

(1) Please consult our website www.schneider-electric.com

Integrated diagnostics

Vijeo Designer can be used to access the “Diag buffer” function of Modicon M340/ Premium/Quantum PLCs via the following protocols:

	Modicon M340 Unity Pro	Premium PL7	Premium Unity Pro	Quantum Unity Pro
UNITE-Series				
UNITE-TCP/IP XWAY				
UMAS Modbus TCP				
UMAS Modbus RTU				
UMAS Modbus Plus				
UMAS UNITE-Series				
UMAS UNITE-TCP/IP XWAY				
UMAS Modbus TCP USB PPP				

 Accessible
 Not accessible

Intelligent Data Service option

Intelligent Data Service (IDS) is an extension of Vijeo Designer for the target PC (Magelis or standard PC) which supports the implementation of control solutions for one or a number of terminals (up to 8).

This extension offers full process traceability. Both process variables and operator actions are tracked so that the right decisions can be made at the right time (*Industrial Business Intelligence*).

Powerful

The IDS extension enables data to be collected from multiple terminals via Ethernet without impairing HMI reaction times.

Flexible

The IDS extension supports various storage methods; CSV files can be read directly in MS Excel, saving as free format in an SQL database or secure IDV (*Intelligent Data Vault*) files to ensure compatibility with the requirements of 21 CFR Part 11.

Innovative

In just a few clicks of the mouse, the IDS extension allows you to create dashboards that can be accessed from any WEB browser (Silverlight) as well as clear and well organized reporting documents.

Intelligent Data Service Report Printing option

Intelligent Data Service (IDS) Report Printing is an extension of Intelligent Data Service for the PC (Magelis or Standard PC).

This extension allows you to create new reports “from scratch” and link them to IDS data.

In addition to editing functions, IDS Report Printing allows you to preview the report before printing, print it or save it to file on disk.

Communication protocols between the HMI application and the PLCs

Communication between the operator dialogue application and the connected control equipment is established using a communication protocol (driver), which is selected when creating the application in Vijeo Designer.

Schneider Electric protocols

Vijeo Designer supports the following Schneider Electric protocols:

- Modbus RTU Master
- Modbus TCP/IP Master
- Modbus Plus (1)
- Modbus 32-bit extensions
- ELAU PacDrive (ELAU C00x/LMCx00)
- Unitelway
- UniTE TCP/IP
- USB terminal port for Modicon M340 CPUs
- FIPIO (2), FIPWAY (2)

All Schneider Electric drivers provide IEC access to input bits/words and output bits/words: Modbus (RTU and TCP/IP), Modbus Plus (GMU and USB), Uni-Telway, Xway.

Direct I/O access authorizes access to the hardware input and output registers.

Register addresses comply with the syntax of IEC standards and the address rules for UNITY configuration software (%I, %IW, %Q, %QW).

If requested by the user, the variables associated with a PLC can be read (*"on demand scan"* function). The DDT and unlocated variables of Unity Pro are supported.

Third-party protocols

Vijeo Designer supports the following third-party protocols:

Emerson

ROC Plus (SIO) and ROC Plus TCP/IP protocols.

Mitsubishi

Melsec protocols: A/Q CPU (SIO), A/Q Ethernet (TCP), QnU Ethernet (TCP), A/Q Link (SIO), QnA CPU (SIO), Q Ethernet (UDP), QnU Ethernet (UDP), FX (CPU), QUTE for Q00JCPU.

Except for Melsec-A Link (SIO) protocol, Mitsubishi serial link protocols do not work on the RJ45 port (1).

Omron

Sysmac protocols: FINS (SIO), LINK (SIO), FINS (Ethernet) and Trajexia.

OMRON serial link protocols do not work on the RJ45 port (3).

Rockwell Automation

Allen-Bradley protocols: DF1-Full Duplex, RS DataHighway 485, Ethernet IP (4) (PLC5, SLC500, MicroLogix, ControlLogix), Ethernet IP native (3) (ControlLogix), Ethernet IP High Speed access, DeviceNet Slave (6), Ethernet IP Explicit.

Siemens

Simatic protocols: MPI (S7-300/400), MPI Direct, RK512/3964R (S7-300/400), PPI, Siemens Ethernet (ISO-on-TCP/Profinet), MPI pass-through function.

The S7-300/400 MPI Adapter and RK512/3964R - RS485 connection serial link protocols do not work on the RJ45 port (3).

Profibus DP protocol (5).

Toyoda

Toyopuc Ethernet PC3J (TCP/IP) and Toyopuc Link (SIO) protocols.

Migration of XBTL 1000 applications

The **Switch2VijeoDesigner** service offer makes it even easier to migrate XBTL 1000 applications created on XBT F terminals to Vijeo Designer applications for use on XBT GT/GK terminals. For further information on this service offer, please consult your Customer Care Centre.

(1) Via USB Modbus Plus gateways: **XBT ZGUMP** for Magelis XBT GT 2●●● and higher, **TSX CUSBMBP** for Smart and Compact iPC (see page 1/70).

(2) Via USB FIPIO gateway **TSX CUSB FIP** (see page 1/70).

(3) They are supported on XBT GT (SUB-D connector, XBT GT2 and higher).

(4) Certified ODVA compatibility.

(5) Via Profibus DP Bus expansion card **XBT ZGDPD** (see page 1/70). Certified by Profibus Foundation.

(6) Via Device Net Bus expansion card **XBT ZGDVN** (see page 1/70).



VJD SUD TGA V61M

References

All licences for the Vijeo Designer configuration software listed below consist of a DVD containing:

- Vijeo Designer software, including:
 - Copyright-free stand-alone installation of Data Manager
- User documentation in electronic format, including:
 - Online help for the software
 - User Manual for the supported targets
 - Setup Manual for the different protocols supported
- A multimedia self-learning tool lasting 1 hour 30 minutes in English/French
- The supported communication protocols

Note: Magelis STO/STU terminals can be programmed using Vijeo Designer Limited Edition. Vijeo Designer V6.1 supports applications created with any version of Vijeo Designer ≥ V4.6.

If you are updating an earlier application, please consult your Schneider Electric Customer Care Centre.

Single-station Build Time licences

Description	Licence type	Application transfer cable		Reference	Weight kg
		PC side	Magelis terminal side		
Vijeo Designer configuration software	Single (1 station)	–	– (1)	VJD SND TGS V61M	0.125
		USB	Magelis STO/STU Magelis GT/GTO/GK/GH/GTW Magelis industrial PCs (2)	VJD SUD TGA V61M	0.330

Multi-station Build Time licences

Description	Licence type	Number of stations	Reference	Weight
Vijeo Designer configuration software	Group	3	VJD GND TGS V61M	0.125
	Team	10	VJD TND TGS V61M	0.125
	Facility	Unlimited number of stations on one site	VJD FND TGS V61M	0.125

Run Time licences (3)

Description	Licence type	Number of stations	Reference	Weight
Vijeo Designer Run Time licence for Magelis GTW & iPC	Single	1	VJDSNRTMPC	–
Intelligent Data Service licence extension for Vijeo Designer Run Time	Single	1	VJDSNTRCKV61M	–
Intelligent Data Service Report Printing for IDS	Single	1	VJDSNTRPRV61M	–
Vijeo Designer Run Time IDS Report Print pack (4)	Single	1	VJDSNTRPKV61M	–

(1) References for application transfer cables (PC to Magelis GT/GTO/GK/GH/GTW terminal) are listed under "Application transfer cables - terminal to PC" on page 1/65.

(2) USB cable for PC connection included, for Magelis XBT 2●●● and higher: XBT ZG935 (see page 1/65).

(3) The Run Time licence drives the execution of an application. It is only used for Magelis industrial PCs and Magelis GTW terminals.

(4) Pack of 3 licences: Vijeo Designer Run Time licence for Magelis iPC, Intelligent Data Service licence extension and Intelligent Data Service Report Printing licence extension.

Technical appendices

- Certifications for automation products page 5/2

Index

- Product reference index page 5/4

Technical appendices

Automation product certifications

EC regulations

Some countries require certain electrical components to undergo certification by law. This certification takes the form of a certificate of conformity to the relevant standards and is issued by the official body in question. Where applicable, certified devices must be labelled accordingly. Use of electrical equipment on board merchant vessels generally implies that it has gained prior approval (i.e. certification) by certain shipping classification societies.

Abbreviation	Certification body	Country
CSA	Canadian Standards Association	Canada
C-Tick	Australian Communications and Media Authority	Australia, New Zealand
GOST	Scientific research institute for GOST standards	Russia
UL	Underwriters Laboratories	USA










Abbreviation	Classification authority	Country
IACS	International Association of Classification Societies	International
ABS	American Bureau of Shipping	USA
BV	Bureau Veritas	France
DNV	Det Norske Veritas	Norway
GL	Germanischer Lloyd	Germany
LR	Lloyd's Register	UK
RINA	Registro Italiano Navale	Italy
RMRS	Russian Maritime Register of Shipping	Russia
RRR	Russian River Register	Russia
CCS	China Classification Society	China

The tables below provide an overview of the situation as at 1st October 2012 in terms of which certifications (listed next to their respective bodies) have been granted or are pending for our automation products.

Up-to-date information on which certifications have been obtained by products bearing the Schneider Electric brand can be viewed on our website: www.schneider-electric.com

5

Product certifications

	Certifications								
									
	UL	CSA	ACMA	GOST	Hazardous locations (1) Class I, div 2	(6)	TÜV Rheinland	SIMTARS	AS-Interface
	USA	Canada	Australia	Russia	USA, Canada			Australia	Europe
Modicon OTB									
Modicon STB					FM	Zone 2 (2)(5)			
Modicon Telefast ABE 7									
ConneXium					(2)				
Magelis PC/GTW		(3)		(2)	(3)	Zone 2/22 (2)			
Magelis XBT GT		(3)		(2)	(2) (3)	Zone 2/22 (2)(5)			
Magelis XBT GK		(3)			(3)				
Magelis XBT N/R/RT					CSA	Zone 2/22 (2)(5)			
Magelis HMI GTO		(3)		(2)	(3)	(2)			
Magelis HMI STO/STU		(3)		(2)	(2)(3)	(2)			
Modicon M340					CSA	Zone 2/22 (2)(8)			(2)
Modicon Momentum									
Modicon Premium				(2)	CSA			(2)	(2)
Modicon Quantum				(2)	FM (2)	Zone 2/22 (2)			
Modicon Quantum Safety				(2)	CSA	Zone 2/22 (2)	SIL 2, SIL 3 (7)		
Preventa XPSMF							SIL 3 (7)		
Modicon TSX Micro									(2)
Phaseo	(3)								
Twido	(4)	(4)			CSA/UL (4)				(2)

(1) Hazardous locations: According to UL 1604, ANSI/ISA 12.12.01, CSA 22.2 No. 213 and FM 3611, certified products are only approved for use in hazardous locations categorized as Class I, division 2, groups A, B, C and D, or in non-classified locations.

(2) Depends on product; please visit our website: www.schneider-electric.com.

(3) North American certification cULus (Canada and USA).

(4) Except for AS-Interface module TWD NOI 10M3, CE only.

(5) For zones not covered by this specification, Schneider Electric offers a solution as part of the CAPP (Collaborative Automation Partner Program). Please consult our Customer Care Centre.

(6) Refer to the instructions supplied with each ATEX and/or IECEx certified product.

(7) According to IEC 61508. Certified by TÜV Rheinland for integration into a safety function of up to SIL 2 or SIL 3.












(8) Can be used in gassy mines under certain conditions.

Technical appendices

Automation product certifications

EC regulations

Merchant navy certifications

Certified Certification pending	Shipping classification societies										
											
	ABS	BV	DNV	GL	KRS	LR	RINA	RMRS	RRR	PRS	CCS
	USA	France	Norway	Germany	Korea	Great Britain	Italy	Russia	Russia	Poland	China
Modicon OTB											
Modicon STB	(1) (2)	(2)	(2)	(2)		(2)	(2)	(2)	(2)		
Modicon Telefast ABE 7											
ConneXium											
Magelis iPC/GTW				Bridge (2)							
Magelis XBT GT	(2)	(2)	(2)	(2)		(2)	(2)	(2)	(2)		
Magelis XBT GK											
Magelis XBT N/R											
Magelis XBT RT											
Magelis HMI GTO											
Magelis HMI STO/STU		(2)	(2)								
Modicon M340								(2)	(2)		
Modicon Momentum											
Modicon Premium											
Modicon Quantum											
Modicon TSX Micro											
Phaseo											
Twido											

(1) Also covers US Navy requirements **ABS-NRV** part 4.

(2) Depends on product; please visit our website: www.schneider-electric.com.

EC regulations

European Directives

The open nature of the European markets assumes harmonization between the regulations set by the member states of the European Union. European Directives are texts whose aim is to remove restrictions on free circulation of goods and which must be applied within all European Union states.

Member states are obligated to incorporate each Directive into their national legislation, and to simultaneously withdraw any regulations that contradict it.

Directives - and particularly those of a technical nature with which we are concerned - merely set out the objectives to be fulfilled (referred to as "essential requirements"). Manufacturers must take all necessary measures to ensure that their products conform to the requirements of each Directive applicable to their equipment.

As a general rule, manufacturers certify compliance with the essential requirements of the Directive(s) that apply to their products by applying a CE mark. The CE mark is affixed to our products where applicable.

Significance of the CE mark

The CE mark on a product indicates the manufacturer's certification that the product conforms to the relevant European Directives; this is a prerequisite for placing a product which is subject to the requirements of one or more Directives on the market and allowing its free circulation within European Union countries. The CE mark is intended for use by those responsible for regulating national markets.

Where electrical equipment is concerned, conformity to standards indicates that the product is fit for use. Only a warranty by a well-known manufacturer can provide assurance of a high level of quality.

As far as our products are concerned, one or more Directives are likely to apply in each case; in particular:

- The Low Voltage Directive (2006/95/EC)
- The Electromagnetic Compatibility Directive (2004/108/EC)
- The ATEX CE Directive (94/9/EC)

Dangerous substances

These products are compatible with:

- The WEEE Directive (2002/96/EC)
- The RoHS Directive (2002/95/EC)
- The China RoHS Directive (Standard SJ/T 11363-2006)
- The REACH regulations Directive (EC 1907/2006)

Note: Documentation on sustainable development is available on our website www.schneider-electric.com (product environmental profiles and instructions for use, ROHS and REACH directives).

End of life (WEEE)

End of life products containing electronic cards must be dealt with by specific treatment processes.

When products containing backup batteries are unusable or at end of life they must be collected and treated separately. Batteries do not contain a percentage by weight of heavy metals above the limit specified by European Directive 2006/66/EC.

490 NTW 000 ●●	1/69	HMI GTO2300	1/43	HMI PUF9 A2PF1	3/28	HMIZS50	1/11	MPC YK5 0SPS KIT	1/62
990 NAA 263 20	1/66	HMI GTO2310	1/43	HMI PUF9 D0P01	3/28	HMIZS6●	1/11		3/30
		HMI GTO2315	1/43	HMI PUF9 D0PF1	3/28	HMIZSCLP●	1/11		3/47
A		HMI GTO3510	1/43	HMI PUH7 A0P01	3/26		1/64	MPC YK9 0MNT KIT	3/47
ABE 7B20MPN20	2/16	HMI GTO4310	1/43	HMI PUH7 A2P01	3/26	HMI ZSD 4G	1/62	MPC YK9 0SPS KIT	3/30
ABE 7B20MPN22	2/16	HMI GTO5310	1/43		3/32		3/30		3/47
ABE 7B20MRM20	2/16	HMI GTO5315	1/43	HMI PUH7 D0P01	3/26	HMI ZS PWO	1/24	MPC YN0 0CF● 00N	1/62
ABE 7BV20	2/16	HMI GTO6310	1/43	HMI PUH7 D2P01	3/26	HMIZSUKIT	1/11		3/8
ABE 7BV20TB	2/16	HMI GTO6315	1/43		3/32	HMI ZS USBB	1/24	MPC YN0 0CFE 00N	1/62
ABE 7E16EPN20	2/16	HMI GTW5354	1/61	HMI PUH9 A0P01	3/28		1/63	MPC YN0 0PWA CTE	3/8
ABE 7E16SPN20	2/16	HMI GTW7354	1/61	HMI PUH9 A2P01	3/28	HMI ZURS	1/24		3/9
ABE 7E16SPN22	2/16	HMI GTW73545	1/61	HMI PUH9 D0P01	3/28		1/65	MPC YNK2 MSD 20N	3/9
ABE 7E16SRM20	2/16	HMI PCCB1	3/42	HMI PUH9 D2P01	3/28			MPC YNK2 SHD 20N	3/9
ABE 7FU●●●	2/16	HMI PCCB	3/43	HMI PVC7 D0E01	3/17	M		MPC YT5 0NAN 00N	3/33
ABF C20R200	2/17	1B5CB26K10N			3/32	MPC FN0 2NAX 00N	3/43		3/47
ABF T20E050	2/16	HMI PCCP	3/31	HMI PWC5 D0E01	3/17	MPC FN0 2NDX 00N	3/43	MPC YT5 0NNN 00N	3/33
ABF T20E●00	2/16		3/32		3/32	MPC FN0 5MAX 00N	3/43	MPC YT9 0NAN 00N	3/33
ABL 4RSM24050	3/30	HMI PCCT	3/31	HMI PWC7 D0E01	3/17	MPC FN0 5MAX 00V	3/43		3/47
	3/41		3/32		3/32	MPC FN0 5NAX 00N	3/43	MPC YT9 0NNN 00N	3/33
ABL 7RM24025	1/70	HMI PCCV	3/31	HMI STO 5●●	1/10	MPC FN0 5NAX 00N	3/43	MSD CHLLMFV31S0	2/29
ABL 8MEM24012	1/70	HMI PCCW	3/31	HMI STU 655	1/10	MPC FN0 5NDX 00N	3/43	MSD CHLLMTV31S0	2/29
ABL 8RPS24050	3/30	HMI PPF7 A27F1	3/27	HMI STU 855	1/10	MPC HN0 2NAX 00N	3/43	MSD CHLLMUV31S0	2/29
	3/41	HMI PPF7 A2701	3/27	HMI YAD DVI RGB 11	3/30	MPC HN0 5MAX 00N	3/43	MSD CHNLMFA	2/29
AM0 2CA 001V000	2/25	HMI PPF7 D07F1	3/27		3/41	MPC HN0 5MAX 00V	3/43	MSD CHNLMTA	2/29
		HMI PPF7 D0701	3/27	HMI YAD SLIDEIN 11	3/30	MPC HN0 5NAX 00N	3/43	MSD CHNLMUA	2/29
B		HMI PPF9 A27F1	3/29		3/41	MPC HN0 5NBX 00N	3/43	MSD CHNSFNV31	2/29
BMX XCA USB H018	1/24	HMI PPF9 A2701	3/29	HMI YBFKT ●1	3/41	MPC HN0 5NDX00N	3/43		
	1/65	HMI PPF9 D07F1	3/29	HMI YBIN SL 11	3/41	MPC KN0 2NAX 00N	3/43	S	
	1/66	HMI PPF9 D0701	3/29	HMI YBMKT 11	3/41	MPC KT2 2MAX 20N	3/9	SR2 CBL 0●	1/25
	1/78	HMI PPH7 A0701	3/27	HMI YCAB DVI1011	3/30	MPC KT2 2NAX 20N	3/9	STB XCA 4002	1/66
BMX XCA USB H045	1/66	HMI PPH7 A2701	3/27		3/41	MPC KT5 5MAX 20L	3/32		
		HMI PPH7 B2701	3/27	HMI YCF S0● 11	3/30	MPC KT5 5MAX 20N	3/32	T	
F		HMI PPH7 D0701	3/27		3/41	MPC KT5 5MAX 20V	3/32	TCS CAR01NM120	2/24
FTX CN 12F5	2/24	HMI PPH7 D2701	3/27	HMI YDR DVDRW 11	3/30	MPC KT5 5NAX 20N	3/32	TCS CAR013M120	2/24
FTX CN 12M5	2/24	HMI PPH9 A0701	3/29		3/41	MPC KT5 5NDX 20N	3/32	TCS CCN 4F3 M●T	2/25
		HMI PPH9 A2701	3/29	HMI YHDD 0250 11	3/30	MPC NB5 0NAN 00N	3/33	TCS CCN 4F3 M05T	2/25
H		HMI PPH9 D0701	3/29		3/41		3/47	TCS CTN011M11F	2/25
HMI BPDF D27F1	3/40	HMI PPH9 D2701	3/29	HMI YIN DVI RGB 11	3/41	MPC SN0 1NAJ 00T	3/43	TCS CTN 023F 13M03	2/24
	3/43	HMI PRH7 A2701	3/27	HMI YLFI MAR 11	3/30	MPC SN0 1NDJ 00T	3/43	TCS CTN 026M 16M	2/24
HMI BPDF D57F1	3/40	HMI PSC7 AE03	3/32		3/41	MPC ST1 1NAJ 00T	3/32	TLA CD CBA 0	2/25
	3/43	HMI PSC7 DE03	3/32	HMI YPFKT ●1	3/30	MPC ST1 1NAJ 00T	3/32	TLA CD CBA 0●●	2/25
HMI BPDF D2701	3/40	HMI PSF7 AP03	3/32	HMI YPMKT 11	3/30	MPC ST1 1NDJ 00T	3/32	TM2 ALM 3LT	2/12
	3/43	HMI PSF7 APF3	3/32	HMI YPUSB UN5 11	3/30	MPC ST2 1NAJ 20T	3/8	TM2 AMI ●HT	2/12
HMI BPDF D5701	3/40	HMI PSF7 APL3	3/32	HMI YRAID D0250 11	3/30	MPC ST2 1NDJ 20T	3/8	TM2 AMI ●LT	2/12
	3/43	HMI PSF7 DP03	3/32		3/41	MPC ST5 2NAJ 20H	3/32	TM2 AMM ●HT	2/12
HMI BPHD D2701	3/40	HMI PTF7 D2P01	3/26	HMI YRAID PCI 11	3/30	MPC ST5 2NAJ 20T	3/32	TM2 AMO 1HT	2/12
	3/43		3/32		3/41	MPC ST5 2NDJ 20T	3/32	TM2 AMO 1HT	2/12
HMI BPHD D5701	3/40	HMI PTH7 D2P01	3/26	HMI YSDD 0060 11	3/30	MPC YB2 0NNN 00N	3/33	TM2 ARI 8HT	2/12
	3/43		3/32		3/41	MPC YB5 0NNN 00N	3/33	TM2 ARI 8LRJ	2/12
HMI BUCN D1E01	3/40	HMI PUC7 D0E01	3/26	HMI YUPS KT 11	3/30	MPC YK0 5RAM 512	3/8	TM2 ARI 8LT	2/12
	3/43		3/32		3/41		3/9	TM2 AVO 2HT	2/12
HMI BUFN D1P01	3/40	HMI PUC9 D0E01	3/28	HMI Z951	1/67	MPC YK1 0MNT KIT	1/62	TM2 DAI 8DT	2/11
HMI BUFN D1PF1	3/40	HMI PUF7 A0P01	3/26	HMI ZECOV●	1/62	MPC YK2 0MNT KIT	1/62	TM2 DDI 8DT	2/11
HMI BUFN D2P01	3/40		3/32	HMI ZG5●	1/64		3/8	TM2 DDI 16DK	2/11
HMI BUFN D2PF1	3/40	HMI PUF7 A2P01	3/26	HMI ZG6●	1/62		3/9	TM2 DDI 16DT	2/11
HMI BUHN D1P01	3/40		3/32	HMI ZG5●2	1/64	MPC YK2 0SPS KIT	1/62	TM2 DDI 32DK	2/11
	3/43	HMI PUF7 A2PF1	3/26	HMI ZGBAT	1/64		3/8	TM2 DDO 8TT	2/11
HMI BUHN D2P01	3/40		3/32	HMI ZGCLP1	1/64		3/9	TM2 DDO 8UT	2/11
	3/43	HMI PUF7 D0P01	3/26	HMI ZGFIK	1/64		3/30	TM2 DDO 16TK	2/11
HMI DID7 DT0	3/33		3/32	HMI ZGFIK	1/64	MPC YK2 2RA1 024	3/8	TM2 DDO 16UK	2/11
	3/47	HMI PUF7 D0PL1	3/26	HMI ZGPWS	1/64		3/9	TM2 DDO 32TK	2/11
HMI GTO1300	1/43		3/32	HMI ZGPWS2	1/64		1/62	TM2 DDO 32UK	2/11
HMI GTO1310	1/43	HMI PUF9 A2P01	3/28	HMI ZLYGO●	1/64	MPC YK5 0MNT KIT	3/47	TM2 DMM 8DRT	2/11

TM2 DMM 24DRF	2/11	XBL YR0●	1/19	XBT Z915	1/20	XBT Z9732	1/21	XBT ZGHCAP	1/63
TM2 DRA 8RT	2/11	XBL YRT0●	1/23		1/24		1/26	XBT ZGHL●	1/60
TM2 DRA 16RT	2/11	XBT GC1100T	2/10		1/65		1/68	XBT ZGHL●●	1/60
TM2 XMT GB	2/12	XBT GC1100U	2/10	SR2 CBL 06	1/20	XBT Z9733	1/26	XBT ZGHSTP	1/64
TSX CAN CA50	2/25	XBT GC2120T	2/10	XBT Z918	1/20		1/68	XBT ZGI232	1/65
TSX CAN CA●00	2/25	XBT GC2120U	2/10		1/25	XBT Z9734	1/26	XBT ZGI485	1/65
TSX CAN CADD●	2/25	XBT GC2230T	2/10		1/66		1/68	XBT ZGJBOX	1/60
TSX CAN CADD03	2/25	XBT GC2230U	2/10	XBT Z925	1/24	XBT Z9740	1/21	XBT ZGM128	1/62
TSX CAN CB50	2/25	XBT GH2460	1/60	XBT Z926	1/20		1/26	XBT ZGM256	1/62
TSX CAN CB●00	2/25	XBT GH2460B	1/60		1/24		1/67	XBT ZGNSTP	1/63
TSX CAN CBDD●	2/25	XBT GK2120	1/60	XBT Z938	1/20	XBT Z9743	1/26	XBT ZGPDP	1/70
TSX CAN CBDD03	2/25		2/23		1/21		1/67	XBT ZGPEN	1/64
TSX CAN CD50	2/25	XBT GK2330	1/60		1/25	XBT Z9780	1/25	XBT ZG PWS1	1/24
TSX CAN CD●00	2/25		2/23		1/26		1/27		1/64
TSX CAN KCDF 90T	2/24	XBT GK5330	1/60		1/27		1/66		2/10
TSX CAN KCDF 90TP	2/24		2/23		1/66		1/69	XBT ZGPWS2	1/64
TSX CAN KCDF 180T	2/24	XBT GT1105	1/59	XBT Z945	1/24	XBT Z9782	1/25	XBT ZGUMP	1/70
TSX CAN TDM4	2/24	XBT GT1135	1/59	XBT Z968	1/20		1/66	XBT ZG USB	1/24
TSX CUSB 485	1/24	XBT GT1335	1/59		1/21	XBT Z9980	1/25		1/63
TSX CUSBFIP	1/70	XBT GT2110	1/59		1/25		1/26		2/10
TSX CUSBMBP	1/70		2/22		1/27		1/27	XBT ZGUSBB	1/63
TSX PCX 1031	1/66	XBT GT2120	1/59		1/66		1/66		2/10
TWD FCN2K2●	2/17		2/22	XBT Z980	1/26		1/69	XBT ZGWMKT	1/63
TWD FCW●0K	2/17	XBT GT2130	1/59		1/67	XBT Z9982	1/25	XBT ZN0●	1/18
TWD FTB2T1●	2/17		2/22	XBT Z988	1/20		1/66	XBT ZN999	1/18
TWD XMT 5	2/12	XBT GT2220	1/59		1/25	XBT ZG5H	1/64	XBT ZNCO	1/18
			2/22		1/66	XBT ZG4●	1/64	XBT ZR0●	1/19
		XBT GT2330	1/59	XBT Z3002	1/24	XBT ZG45B	1/64		1/23
			2/22		1/63	XBT ZG5●	1/64	XBT ZRCO	1/19
		XBT GT2430	1/59	XBT Z3004	1/24		2/10		1/23
			2/22	XBT Z9008	1/66	XBT ZG6●	1/62	XBT ZRT 999	1/23
		XBT GT2930	1/59		1/69		2/10		1/24
			2/22	XBT Z9018	1/66	XBT ZG7●	1/62	XBT ZRT PW	1/24
		XBT GT4230	1/59		1/69	XBT ZG9●9	1/65	XVGU3SHAV	1/78
			2/22	XBT Z9680	1/20		1/67		1/79
		XBT GT4330	1/59		1/25		1/68	XVGU3SWV	1/78
			2/22	XBT Z9681	1/20	XBT ZG 935	1/24		1/79
		XBT GT4340	1/59		1/21		1/65		
			2/22		1/25		2/10		
		XBT GT5230	1/59	XBT Z9686	1/27	XBT ZG9292	1/68		
			2/22	XBT Z9087	1/27	XBT ZG9721	1/26	Z	
		XBT GT5330	1/59		1/66		1/68	ZB5AZ901	1/11
			2/22	XBT Z9687	1/27		1/68	ZB5AZ905	1/11
		XBT GT5340	1/59	XBT Z9688	1/27	XBT ZG9722	1/68		
			2/22	XBT Z9710	1/20	XBT ZG 9731	1/67		
		XBT GT 5430	1/59		1/25		1/68		
			2/22	XBT Z9711	1/20	XBT ZG9740	1/67		
		XBT GT6330	1/59		1/66	XBT ZG977●	1/67		
			2/22		1/66	XBT ZG ABE●	2/16		
		XBT GT6340	1/59		1/25	XBT ZGADT	1/63		
			2/22		1/66		3/8		
		XBT GT7340	1/59	XBT Z9715	1/26	XBT ZGAUX	1/64		
			2/22		1/66	XBT ZGCCAN	2/10		
		XBT GTW652	1/61		1/66	XBT ZGCHOK	2/10		
		XBT N200	1/18	XBT Z9720	1/21	XBT ZGCLP●	1/64		
		XBT N4●●	1/18		1/26		2/10		
		XBT NU400	1/18	XBT Z9721	1/21	XBT ZGCNC	1/64		
			1/18		1/26	XBT ZGCO●	1/63		
		XBT R400	1/19	XBT Z9730	1/21	XBT ZG DIO●	2/10		
		XBT R41●	1/19		1/26	XBT ZGDVN	1/70		
		XBT RT50●	1/22		1/68	XBT ZGESGD	1/64		
		XBT Z908	1/21	XBT Z9731	1/21	XBT ZG FIX	1/64		
			1/27		1/26		2/10		
			1/69		1/68				

Schneider Electric Industries SAS

www.schneider-electric.com

Head Office
35, rue Joseph Monier
F-92500 Rueil-Malmaison
France

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Design: Schneider Electric
Photos: Schneider Electric
Printed by:

