


simon

CARGADOR USB

USB CHARGER

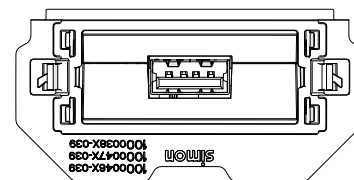

10000380-039

Características técnicas

Technical specifications


127VAC 60Hz (±10%)	230VAC 50Hz (±10%)	Standby <100mW	2,1A Max.
 35°C 5°C	IP20		

simon


INSTALACIÓN - INSTALLATION

1


8mm

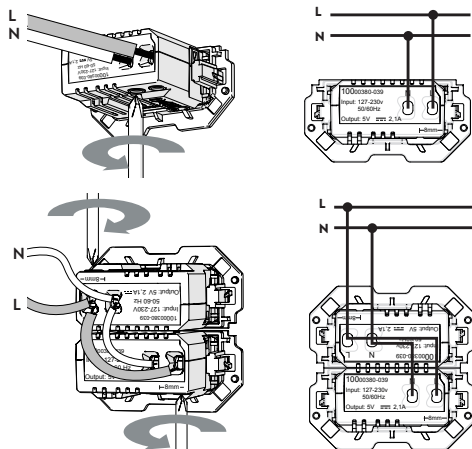


2





30 mm
longitud máxima recomendada.
Max. length recommended

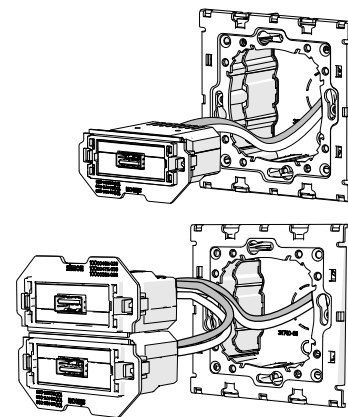

3

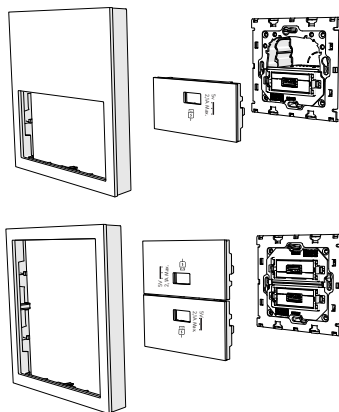

4



- Cuando se instalan dos cargadores en un mismo cajetín y la temperatura ambiente es de 35°C o superior, en el caso que los dos cargadores estén cargando a máxima potencia*, hay una pérdida de potencia del 30% en el cargador situado en la parte superior debido al calentamiento.

- Cuando se instala el Kit de 2 elementos base + interruptor regulable + cargador USB (Art. 10010209-039), en el caso que tanto el interruptor regulable como el cargador USB estén a máxima potencia** y la temperatura ambiente es de 35°C o superior, se pueden producir apagados momentáneos en el interruptor regulable por protección debido al calentamiento.

* 2.1A

** 240W / 2.1A



- When two chargers are in a same box and the ambient temperature is 35 °C or higher, in the case that two chargers are charging at maximum power*, there is a loss of 30% power on the charger at the top due to global warming.

- When installing 2 element kit, 1 socket + 1 dimmer + USB charger (Art. 10010209-039), in the case that both the USB charger and dimmer are at maximum power ** and the ambient temperature is 35 °C or higher, may occur off momentary in the dimmer for protection due to global warming.

* 2.1A

** 240W / 2.1A