

Arteor™ access control



5727 50






5727 51



767 10


Mechanisms supplied complete with White or Magnesium square cover plate, flush-mounting box, support frame and plate

Pack	Cat. No.	Readers
1	5722 50 (1) 5727 50 (2)	Fingerprint reader 5 vertical modules 22.5 x 45 mm IP 40 - IK 04 Power supply: 12 V _± Equipped with 2 LEDs red/green and 1 buzzer. Can be used in stand-alone mode or with door controller (Cat. No. 767 04, or other control panel using Wiegand protocol) Permanent backup memory 
1	5722 51 (1) 5727 51 (2)	Card reader 12 V _± - 118 mA 500 users in stand-alone mode 10000 users with Legrand door controller 767 04 1 door potential free changeover contact (1 A - 12 V) adjustable from 1 sec to 255 sec 1 push-button potential free input Built-in back-lighted LCD for clear instruction display 
1	5722 52 (1) 5727 52 (2)	Coded keypad reader 12 V _± - 47 mA 99 users in stand-alone mode 10000 users with door controller Cat. No. 767 04 1 door potential free changeover contact (1 A - 12 V) adjustable from 1 sec to 255 sec 1 push-button potential free contact Built-in Wiegand protocol interface 
5	767 10	Badges for card reader  Contactless keyfob badge (13.56 Mhz Mifare) Possibility to personalise the label
10	767 11	 ISO contactless card (13.56 Mhz Mifare) Dimensions: 50 x 80 mm


(1) Supplied with White plate
(2) Supplied with Mirror Black plate

Arteor™ access control


■ Installation principle in stand alone mode

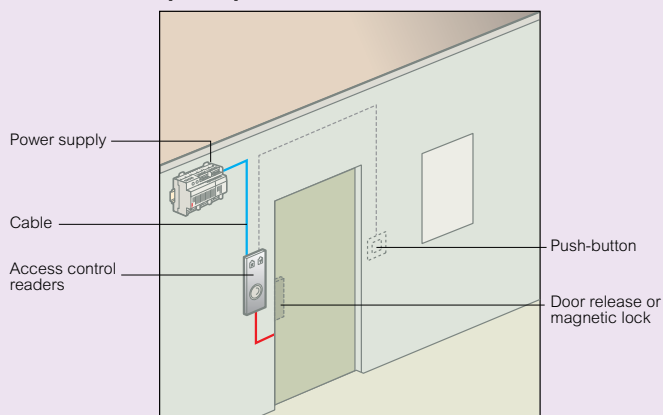

■ Stand-alone

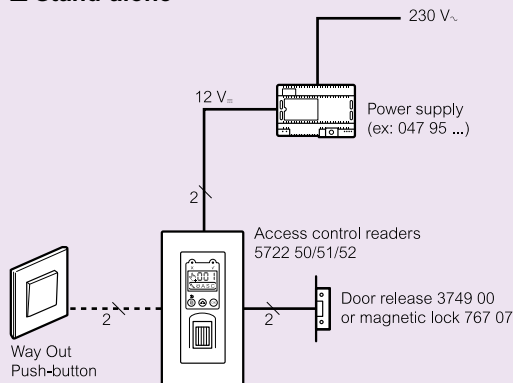

■ Centralized

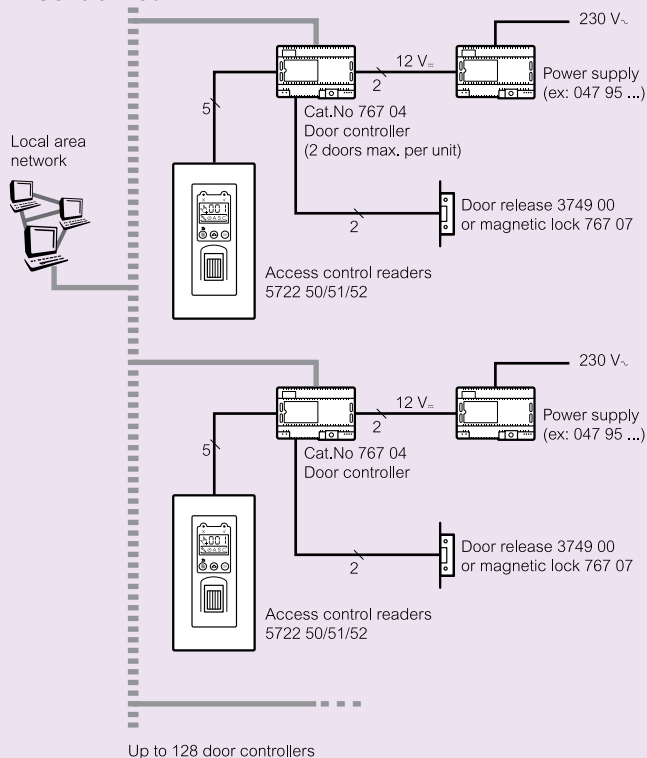

Note: for Cat No.s 047 95, 3749 00 please consult the Legrand general catalogue