


Trip unit Ekip Dip LSIG XT2

The rating of the CB can be selected, the protection settings made and the curve and entered values displayed in this section.

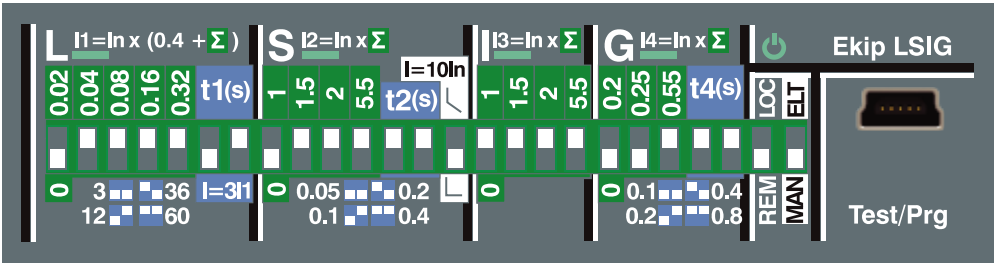

In
160

Parameters
Rem, Man

	Current threshold (A)	Current intensity (A)	Actuation time (sec)
L	1 x 160 (In)	160.00	I1 12 t1
S	9 x 160 (In)	1440.00	I2 0.4 t2
I	10 x 160 (In)	1600.00	I3
G	0.55 x 160 (In)	88.00	I4 0.8 t4

