

A man in a green polo shirt is holding a large, square, industrial-style LED light fixture. The fixture has a white frame with a grid of small, square LED chips in the center. The background is a large, open industrial space with a high ceiling and visible structural beams. In the top right corner, there is a circular logo with a rainbow border and the word "LED" in blue. The overall tone is professional and modern.

PHILIPS

CoreLine

LED Range

For every
space,
every
solution

Meet CoreLine:
the complete range of LED lighting

For every space, **every solution**

Whether for a new building or renovation of an existing space, customers want lighting solutions that provide quality of light and substantial energy and maintenance savings.

The new CoreLine range of LED luminaires offers stylish, energy-saving, affordable, and easy-to-install lighting solutions – viable replacements for traditional lighting technologies across numerous applications.

Using LED lighting technology across the range allows longer lifetimes, which means reduced maintenance and fewer replacement parts, plus energy savings of up to 75% compared with traditional lighting fixtures – all leading to more sustainable lighting solutions.

The quality and light levels delivered by the CoreLine range enable ‘hole-for-hole’ replacement of similar traditional lighting fixtures. Simply remove the old fixture and fit the new innovative LED CoreLine solution; virtually no need for expensive rewiring or new ceiling configurations.

The look and feel of CoreLine solutions is consistent – ease of installation, coupled with quality finishes across the range, ensures CoreLine is the clear choice for LED.

The CoreLine family consists of eleven quality products

Downlight, Recessed, Panel, ProSet, Surface-mounted, Wall-mounted, Batten, Waterproof, High-bay, Trunking and Tempo.



The installer touch-points are highlighted with green colors, which are consistent across the CoreLine range.



The product label is recognizable with a QR tag.

“Want increased lighting comfort & **additional energy savings?**”

Simply add controls

By simply adding lighting controls with CoreLine luminaires – significant additional savings can be made on costs associated with energy and carbon; reducing the payback time of the installation.

Lighting need only be on where and when needed. Movement and presence detection controls can help you to simply achieve this – reducing costs, whilst still ensuring comfort and safety. CoreLine dedicated controls; the clear choice for many applications.

www.philips.com/coreline

The CoreLine LED Range



CoreLine Downlight

The cost-effective solution
for indoor lighting.



CoreLine Recessed

Stylish design &
easy placement.




CoreLine Panel

Excellent diffused
light quality.



CoreLine ProSet

Easy replacement
for halogen.

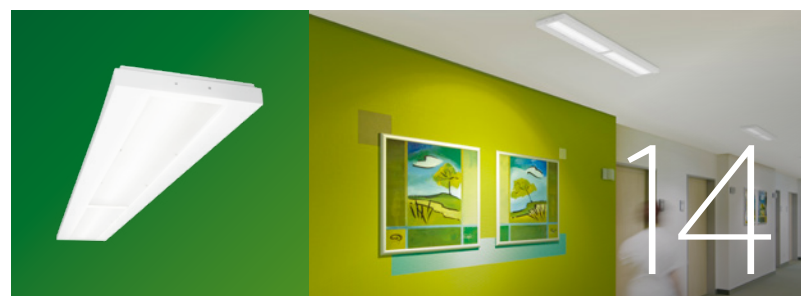

CoreLine Surface-mounted

Slim design for
discreet placement.

CoreLine Wall-mounted

User friendly through
built-in controls.



CoreLine Batten

Simple switch to
LED luminaires.



CoreLine Waterproof

Excellent performance
& sleek design.



CoreLine High-bay

Excellent performance,
reduced maintenance.



CoreLine Trunking

Best solution in
lumens per €.



CoreLine Tempo

The cost-effective solution
for area lighting.



CoreLine Downlight



CoreLine
.....
LED Range
.....
Downlight
.....

“The cost-effective solution for indoor lighting.”

Up to
75%
energy savings

Project: AB Group, Italy

Specifications

Type	DN125B
Power	Mini 13 W, Compact 24 W
Luminous Flux	Mini 1000 lm, Compact 2000 lm
Color Temp.	3000 K, 4000 K
CRI	≥ 80
Lifetime	50,000 hrs

Benefits

- General lighting - replacing CFL
- Up to 75% energy savings
- 5 x longer lifetime
- 2 year payback
- Dimmable

Application


General lighting / Corridors /
Indoor circulation areas

	CFL EM	CoreLine Downlight
		
Wattage Mini	51W	13W
Wattage Compact	66W	24W
Lifetime	10,000 hrs	50,000 hrs

Savings over life*

€ 312.-

*Based on European average of 12 cent/kW hours including maintenance and lamp replacement cost.

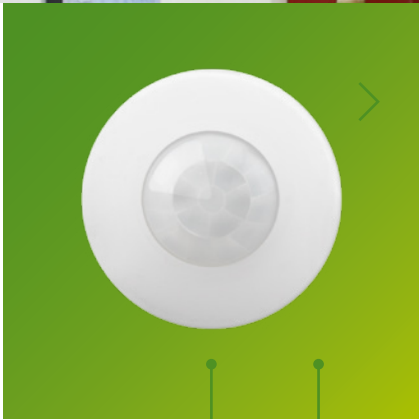


Presence Detector
LRM 1011

Up to 30% additional energy savings when combined with the Presence Detector

Benefits

- Small, unobtrusive sensor
- detects subtle movement
- Increased lifespan of installation
- turns off lighting when not required

Corridor example



● Luminaire ● Detector — Mains to luminaire



CoreLine Recessed



CoreLine

.....

LED Range

.....

Recessed

.....



Project: Sede EON, Santander

Up to

40%

energy savings

“Stylish design & easy placement.”

Specifications

Type	RC120B
Power	LED37S version: 42 W LED26S version: 31W
Luminous Flux	LED37S version: 3700 lm, LED26S version: 2600 lm
Color Temp.	3000 K, 4000 K
CRI	≥ 80
Lifetime	50,000 hrs

Benefits

- General lighting - replacing conventional TL-D & TL-5
- Up to 40% energy savings
- 3.3 x longer lifetime
- Slim design & <35 mm height
- Office compliant optic available - VAR-PC version

Application


General lighting

	TL-D / TL-5	CoreLine Recessed
		
Wattage	63 W 70 W	42 W 42 W
Lifetime	25,000 hrs 15,000 hrs	50,000 hrs 50,000 hrs

Savings over life*

€222.-

*Based on European average of 12 cent/kW hours including maintenance and lamp replacement cost.

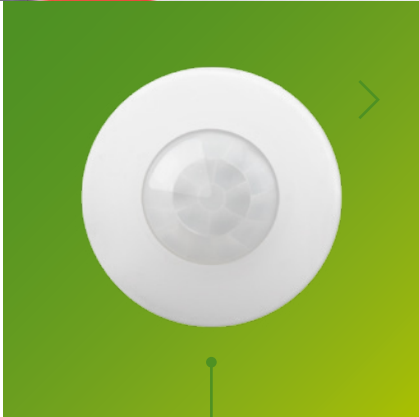


Presence Detector LRM 1011

Up to 30% additional energy savings when combined with the Presence Detector

Benefits


- Small, unobtrusive sensor
- detects subtle movement
- Increased lifespan of installation
- turns off lighting when not required

Open plan office example



● Luminaire ● Detector — Mains to luminaire

CoreLine Panel

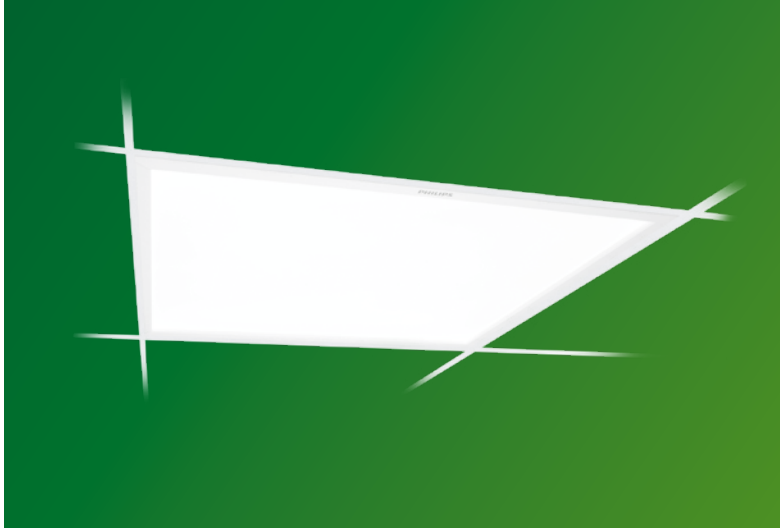

CoreLine
.....
LED Range
.....
Panel
.....



“Excellent
diffused
light quality.”

Up to
40%
energy
savings

Project: Leerpark, The Netherlands

Specifications

Type	RC125B, RC126B
Power	41W
Luminous Flux	3400 lm
Color Temp.	3000 K, 4000 K
CRI	≥ 80
Lifetime	40,000 hrs

Benefits

- General lighting - replacing conventional TL-D & TL-5
- Up to 40% energy savings
- 2.6 x longer lifetime
- Efficacy (lm/w) 83 lm/w
- Warranty: 3 year
- Easy connection

Application


General lighting

	TL-D / TL-5	CoreLine Panel
		
Wattage	63 W 70 W	41 W 41 W
Lifetime	25,000 hrs 15,000 hrs	40,000 hrs 40,000 hrs

Savings over life*

€180.-

*Based on European average of 12 cent/kW hours including maintenance and lamp replacement cost.

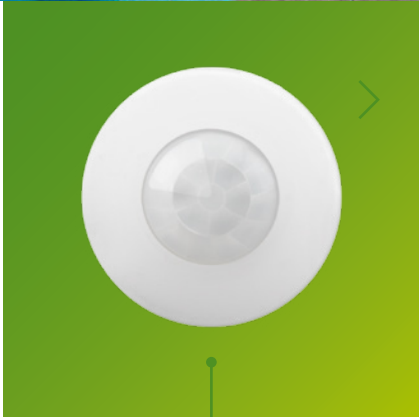


Presence Detector LRM 1011

Up to 30% additional energy savings when combined with the Presence Detector

Benefits

- Small, unobtrusive sensor
- detects subtle movement
- Increased lifespan of installation
- turns off lighting when not required
- Parallel option for open plan

Open plan office example



● Luminaire ● Detector — Mains to luminaire



Presence
Detection

CoreLine ProSet



CoreLine

.....

LED Range

.....

ProSet

.....



Project: Wales Millennium Centre, Cardiff

Up to

75%

energy savings

“Easy replacement for halogen.”

Specifications

Type	RS120B Fixed version RS121B Adjustable version
Power	13W
Luminous Flux	640 lm
Color Temp.	3000 K, 4000 K
CRI	> 80
Lifetime	50,000 hrs

Benefits

- Accent lighting – replacing Halogen
- Up to 75% energy savings
- 16 x longer lifetime
- 8 month payback
- Dimmable & IP44 rated
- Available in 25 or 40 degree beam angle

Application

Hospitality areas, Public areas:
Lobby & reception area / Display racks /
Corridors / Washrooms

	LV Halogen	CoreLine ProSet
		
Wattage	54W	13W
Lifetime	3000 hrs	50,000 hrs

Savings over life*

€324.-

*Based on European average of 12 cent/kW hours including maintenance and lamp replacement cost.




Movement Detector LRM 1032

Up to 50% additional energy savings when combined with the Movement Detector

Benefits

- Movement detector unit replaces traditional light switch
- Retrofit possible (use LRM1033)
- Increased lifespan of installation – turns off lighting when not required

Washroom example



● Luminaire ● Detector — Mains to luminaire

CoreLine Surface-mounted



CoreLine
.....
LED Range
.....
Surface-mounted
.....

“Slim design
for discreet
placement.”

Up to
40%
energy
savings



Specifications

Type	SM120V
Power	LED37S version: 42 W LED26S version: 31 W
Luminous Flux	LED37S version: 3700 lm LED26S version: 2600 lm
Color Temp.	3000 K, 4000 K
CRI	≥ 80
Lifetime	50,000 hrs

Benefits

- General lighting - replacing conventional TL-D & TL-5
- Up to 40% energy savings
- 3.3 x longer lifetime
- Slim design & <40 mm height
- Suspension set available for suspended applications

Application

General lighting

	TL-D / TL-5	CoreLine Surface-mounted
		
Wattage	63 W 72 W	42 W 42 W
Lifetime	25,000 hrs 15,000 hrs	50,000 hrs 50,000 hrs

Savings over life*

€222.-

*Based on European average of 12 cent/kW hours including maintenance and lamp replacement cost.

**The CoreLine Surface-mounted is also available in suspended mode.




Presence Detector LRM 1000

Up to 30% additional energy savings when combined with the Presence Detector

Benefits

- Increased lifespan of installation - turns off lighting when not required
- Detects subtle movement
- Surface mounted sensor installation

Washroom example



● Luminaire ● Detector — Mains to luminaire

CoreLine Wall-mounted

CoreLine

LED Range

Wall-mounted

“User friendly through built-in controls.”

Up to
55%
energy savings

Specifications

Type	WL120V Round WL121V Oval
Luminous Flux and Power	WL121V LED5S: 500 lm, 8 W WL120V LED12S: 1200 lm, 18 W WL120V LED16S: 1600 lm, 24 W
Color Temp. CRI	3000 K, 4000 K > 80
Lifetime	50,000 hrs

Benefits

- General lighting - replacing traditional wall-mounted luminaires
- Up to 55% energy savings
- 5 x longer lifetime
- IP65 & IK10 with built-in controls
- Dimmable

Application

Corridors / Staircases / Public entrance areas / Bathrooms / Emergency exits / Parking garages / Outdoor safety lighting

	Electronic PL-C	CoreLine Wall-mounted
		
Wattage	1x18 W 2x26 W	8 W 24 W
Lifetime	10,000 hrs	50,000 hrs

Savings over life*

	LED12S	LED16S
	€177.-	€240.-

*Based on European average of 12 cent/kW hours including maintenance and lamp replacement cost.




Built-in Movement Detector LED5S, LED12S & LED16S

Up to 70% additional energy savings when built-in Movement Detectors are optimized

Benefits

- Fast & easy installation due to built-in sensor
- Adjustment of brightness, sensitivity & timer is quick and easy via push buttons

Staircase example



● Luminaire — Mains to luminaire

CoreLine Batten



CoreLine
.....
LED Range
.....
Batten
.....



Specifications

Type	BN120C push-in connection BN121C IEC connector
Power	LED19S L600: 20 W LED38S L1200: 40 W
Luminous Flux	LED19S L600: 1900 lm LED38S L1200: 3800 lm
Color Temp.	3000 K, 4000 K
CRI	≥ 80
Lifetime	50,000 hrs

Benefits

- General lighting - replacing conventional TL-D
- Up to 40% energy savings
- 3.3 x longer lifetime
- Installation flexibility & lengths same as TL-D
- Excellent performance & light quality with frosted diffuser

Application

General lighting / Assembly lines / Cove lighting

	TL-D	CoreLine Batten
		
Wattage	2x18 W 2x36 W	20 W 40 W
Lifetime	15,000 hrs	50,000 hrs

Savings over life*

LED19S LED38S
€130.- €225.-

*Based on European average of 12 cent/kW hours including maintenance and lamp replacement cost.




**Movement Detector
LRM 1032**

Up to 50% additional energy savings when combined with the Movement Detector

Benefits

- Movement detector unit replaces traditional light switch
- Retrofit possible (use LRM1033)
- Increased lifespan of installation - turns off lighting when not required

Small warehouses example



● Luminaire ● Detector — Mains to luminaire

CoreLine Waterproof



CoreLine
.....
LED Range
.....
Waterproof
.....



Project: Sparkasse am Brill, Bremen

Up to
50%
energy
savings

“Excellent performance
& sleek design.”

Specifications

Type	WT120C
Luminous Flux and Power	LED18S L600: 1800 lm, 19 W LED22S L1200: 2200 lm, 23 W LED40S L1200: 4000 lm, 41 W LED34S L1500: 3400 lm, 29 W LED60S L1500: 6000 lm, 57 W
Color Temp.	4000 K
CRI	≥ 80
Lifetime	50,000 hrs

Benefits

- Industrial lighting - replacing conventional TL-D & TL-5
- Up to 50% energy savings
- 3.3 x longer lifetime
- Installation flexibility & lengths same as TL-D
- Excellent performance & sleek design
- IP65 & IK08 rated

Application

Parking garages / Warehouses / General lighting

	TL-D	CoreLine Waterproof
		
Wattage	2x18 W 1x36 W 2x36 W 1x58 W 2x58 W	19 W 23 W 41 W 29 W 57 W
Lifetime	15,000 hrs	50,000 hrs

Savings over life*

LED40S LED60S
€220.- €385.-

*Based on European average of 12 cent/kW hours including maintenance and lamp replacement cost.




Movement Detector LRM 1040

Up to 70% additional energy savings when combined with the Movement Detector

Benefits

- Daylight override sensor prevents switch on if enough daylight is available
- Up to 20 years usage
- Increased lifespan of installation - turns off lighting when not required
- Wall and ceiling mounting possibility
- IP54

Small parking garage example



● Luminaire ● Detector — Mains to luminaire

CoreLine High-bay



CoreLine

LED Range

High-bay



Project: Ica Max, Halmstad

Specifications

Type	BY120P BY121P
Power	BY120P: 100 W BY121P: 200 W
Luminous Flux	BY120P: 10,500 lm BY121P: 20,500 lm
Color Temp.	4000 K
CRI	≥ 80
Lifetime	50,000 hrs

Benefits

- Industrial lighting – point-for-point replacement of 250 W & 400 W conventional HPI high-bays
- Up to 63% energy savings
- 5 x longer lifetime
- Reduced maintenance
- Excellent performance & light quality – high CRI

Application

Warehouses / Industry / Major halls / Supermarkets

	HPI	CoreLine High-bay
		
Wattage	250 W 400 W	100 W 200 W
Lifetime	10,000 hrs	50,000 hrs

Savings over life*

€1530.-

*Based on European average of 12 cent/kW hours including maintenance and lamp replacement cost.

“Excellent performance, reduced maintenance.”

CoreLine Trunking



CoreLine
.....
LED Range
.....
Trunking
.....



Project: Cassidian, Manching Germany

Up to
50%
energy
savings

Specifications

Type	LL120X: 3,4 m LL121X: 1,7 m
Power	45 W up to 140 W
Luminous Flux	4000 lm to 7000 lm (per 1,5 m)
Color Temp.	4000 K (and 3000 K for higher lumen packages)
CRI	≥ 80
Lifetime	50,000 hrs

Benefits

- Replacement for conventional TL-D & TL-5
- Up to 54% energy savings
- 3.3 x longer lifetime
- Reduced maintenance & best lumens per € solution
- Excellent beam shapes & sparkle for product enhancement

Application

Supermarkets / Warehouses / Assembly areas

	TL-D EM	CoreLine Trunking
		
Wattage	133 W	70 W (1,7 m)
Lifetime	15,000 hrs	50,000 hrs

Savings over life*

€ 411.-

*Based on European average of 12 cent/kW hours including maintenance and lamp replacement cost.

“ Best solution
in lumens per €.”

CoreLine Tempo



CoreLine
.....
LED Range
.....
Tempo
.....



Specifications

Type	BVP120
Power	40 W, 80 W, 120 W
Luminous Flux	4000 lm, 8000 lm, 12,000 lm
Color Temp.	4000 K
CRI	80
Lifetime	50,000 hrs

Benefits

- Point-to-point replacement from 70 W to 250 W conventional floodlight
- Energy savings up to 50% compared to HPI-P systems
- More light control. Light where is needed
- Instant light, long lifetime
- Reliable Quality: Die-casting aluminium housing guarantees robustness, vibration-proof, wind force protection, painted in RAL 9007, IP65 protection

Application

General outdoor Area lighting / Industrial Areas / Billboards / Parking lots / Building facades

	HID	CoreLine Tempo
		
Wattage	70 W 150 W 250 W	40 W 80 W 120 W
Lifetime	20,000 hrs	50,000 hrs

Savings over life*

€900.-

*Based on European average of 12 cent/kW hours including maintenance and lamp replacement cost.

“The cost-effective solution for area lighting.”

Product Overview

CoreLine Downlight



CFL EM

66 W (Compact)	10,000 hrs
51 W (Mini)	10,000 hrs
66 W (Compact)	10,000 hrs
51 W (Mini)	10,000 hrs



CoreLine Downlight

24 W (Compact)	50,000 hrs
13 W (Mini)	50,000 hrs
24 W (Compact)	50,000 hrs
13 W (Mini)	50,000 hrs

Save up to

Product description

DN125B LED20S/840 PSR WH
DN125B LED10S/840 PSR WH
DN125B LED20S/830 PSR WH
DN125B LED10S/830 PSR WH

EOC code

29490299
29488999
29489699
29487299

CoreLine ProSet



LV Halogen

54 W	3,000 hrs
54 W	3,000 hrs
54 W	3,000 hrs
54 W	3,000 hrs
54 W	3,000 hrs
54 W	3,000 hrs
54 W	3,000 hrs
54 W	3,000 hrs



CoreLine ProSet

13 W	50,000 hrs
13 W	50,000 hrs
13 W	50,000 hrs
13 W	50,000 hrs
13 W	50,000 hrs
13 W	50,000 hrs
13 W	50,000 hrs
13 W	50,000 hrs

75%

RS120B LED6-40-/840 PSR WH
RS121B LED6-40-/840 PSR WH
RS120B LED6-40-/830 PSR WH
RS121B LED6-40-/830 PSR WH
RS120B LED6-25-/840 PSR WH
RS121B LED6-25-/840 PSR WH
RS120B LED6-25-/830 PSR WH
RS121B LED6-25-/830 PSR WH

89865799
89866499
89861999
89862699
89863399
89864099
89859699
89860299

CoreLine Panel



TL-D / TL-5

70 W	15,000 hrs
63 W	25,000 hrs



CoreLine Panel

41 W	40,000 hrs
41 W	40,000 hrs

54%

RC125B LED34S/840 PSU W60L60
RC125B LED34S/830 PSU W60L60

06731400
06732100

CoreLine Recessed



TL-D / TL-5

70 W	15,000 hrs
63 W	25,000 hrs
70 W	15,000 hrs
63 W	25,000 hrs



CoreLine Recessed

42 W	50,000 hrs
42 W	50,000 hrs
42 W	50,000 hrs
42 W	50,000 hrs

33%

RC120B LED37S/840 PSU W60L60
RC120B LED26S/840 PSU W60L60
RC120B LED37S/840 PSU W30L120
RC120B LED26S/840 PSU W30L120

89755199
89756899
89757599
89758299

CoreLine Surface-mounted



TL-D / TL-5

70 W	15,000 hrs
63 W	25,000 hrs
70 W	15,000 hrs
63 W	25,000 hrs



CoreLine Surface-mounted

42 W	50,000 hrs
42 W	50,000 hrs
42 W	50,000 hrs
42 W	50,000 hrs

40%

SM120V LED37S/840 PSU W60L60
SM120V LED26S/840 PSU W60L60
SM120V LED37S/840 PSU W20L120
SM120V LED26S/840 PSU W20L120

89759999
89760599
89761299
89762999

CoreLine Wall-mounted



Electronic PL-C

2x26 W	10,000 hrs
2x18 W	10,000 hrs
1x18 W	10,000 hrs
2x26 W	10,000 hrs
2x18 W	10,000 hrs
1x18 W	10,000 hrs
2x26 W	10,000 hrs
2x18 W	10,000 hrs
1x18 W	10,000 hrs
2x26 W	10,000 hrs
2x18 W	10,000 hrs
1x18 W	10,000 hrs



CoreLine Wall-mounted

24 W	50,000 hrs
18 W	50,000 hrs
8 W	50,000 hrs
24 W	50,000 hrs
18 W	50,000 hrs
8 W	50,000 hrs
24 W	50,000 hrs
18 W	50,000 hrs
8 W	50,000 hrs
24 W	50,000 hrs
18 W	50,000 hrs
8 W	50,000 hrs

54%

WL120V LED16S/840 PSR WH
WL120V LED12S/840 PSR WH
WL121V LED5S/840 PSR WH
WL120V LED16S/830 PSR WH
WL120V LED12S/830 PSR WH
WL121V LED5S/830 PSR WH
WL120V LED16S/840 PSR MDU WH
WL120V LED12S/840 PSR MDU WH
WL121V LED5S/840 PSR MDU WH
WL120V LED16S/830 PSR MDU WH
WL120V LED12S/830 PSR MDU WH
WL121V LED5S/830 PSR MDU WH

06633199
06635599
06637999
06639399
06641699
06643099
24117200
24105900
24290200
24111000
24099100
24288900

CoreLine Batten



TL-D

2x36 W	15,000 hrs
2x18 W	15,000 hrs
2x36 W	15,000 hrs
2x18 W	15,000 hrs
2x36 W	15,000 hrs
2x18 W	15,000 hrs
2x36 W	15,000 hrs
2x18 W	15,000 hrs



CoreLine Batten

40 W	50,000 hrs
20 W	50,000 hrs
40 W	50,000 hrs
20 W	50,000 hrs
40 W	50,000 hrs
20 W	50,000 hrs
40 W	50,000 hrs
20 W	50,000 hrs

Save up to

Product description

BN120C LED38S/840 PSU L1200
BN120C LED19S/840 PSU L600
BN121C LED38S/840 PSU L1200
BN121C LED19S/840 PSU L600
BN120C LED38S/830 PSU L1200
BN120C LED19S/830 PSU L600
BN121C LED38S/830 PSU L1200
BN121C LED19S/830 PSU L600

EOC code

89957999
89955599
89958699
89956299
89961699
89959399
89962399
89960999

CoreLine Waterproof



TL-D

2x58 W	15,000 hrs
1x58 W	15,000 hrs
2x36 W	15,000 hrs
1x36 W	15,000 hrs
2x18 W	15,000 hrs



CoreLine Waterproof

57 W	50,000 hrs
29 W	50,000 hrs
41 W	50,000 hrs
23 W	50,000 hrs
19 W	50,000 hrs

50%

WT120C LED60S/840 PSU L1500
WT120C LED34S/840 PSU L1500
WT120C LED40S/840 PSU L1200
WT120C LED22S/840 PSU L1200
WT120C LED18S/840 PSU L600

84049700
84047300
84048000
84046600
84045900

CoreLine High-bay



HPI

400 W	10,000 hrs
250 W	10,000 hrs



CoreLine High-bay

250 W	50,000 hrs
100 W	50,000 hrs

54%

BY121P G2 LED20S5/840 PSU WB GR
BY120P G2 LED10S5/840 PSU WB GR
BY121Z G2 MB (Mounting bracket)
BY120Z G2 MB (Mounting bracket)

29606700
29605000
29608199
29607499

CoreLine Trunking



TL-D EM

4x58 W (3m)	15,000 hrs
2x58 W (3m)	15,000 hrs
2x58 W (1.5m)	15,000 hrs
1x58 W (1.5m)	15,000 hrs



CoreLine Trunking

140 W (3.4m)	50,000 hrs
90 W (3.4m)	50,000 hrs
70 W (1.7m)	50,000 hrs
45 W (1.7m)	50,000 hrs

54%

LL120X LED160S/840 PSD WB 7 WH
LL120X LED90S/840 PSU DA20 5 WH
LL121X LED80S/840 PSD WB 7 WH
LL121X LED45S/840 PSU DA20 5 WH

88143800
88184100
88142100
88183400

CoreLine Tempo



HID

250 W	20,000 hrs
150 W	20,000 hrs
70 W	20,000 hrs
250 W	20,000 hrs
150 W	20,000 hrs
70 W	20,000 hrs



CoreLine Tempo

120 W	50,000 hrs
80 W	50,000 hrs
40 W	50,000 hrs
120 W	50,000 hrs
80 W	50,000 hrs
40 W	50,000 hrs

52%

BVP120 LED120/NW S
BVP120 LED80/NW S
BVP120 LED40/NW S
BVP120 LED120/NW A
BVP120 LED80/NW A
BVP120 LED40/NW A

29587900
29586200
29585500
29590900
29589300
29588600

Product Overview

LRM1000		Product type Presence Detector	Product description LRM1000 OS mov det	EOC code 22557700
LRM1011		Product type Presence Detector	Product description LRM1011 OS mov det small	EOC code 22561400
LRM1032		Product type Movement Detector	Product description LRM1032 OS mov det switch 2w DI	EOC code 22567500
LRM1040		Product type Movement Detector	Product description LRM1040 OS mov det IP55 240dgr	EOC code 22573700
UID8670		Product type Mains Dimming	Product description UID8670/00 LED dimmer	EOC code 67562400



For more information about the CoreLine range, please visit:
www.philips.com/coreline



For detailed product information and full specification visit:
www.ecat.lighting.philips.nl



“My space, my solution.”

AllTapeSupplies has been a leader in the self-adhesive tape business for more than 25 years. When the time came to decide for the lighting equipment of their new office in Tilburg, the Netherlands, they looked for a solution that reflected the same value that the company brings to its clients: quality performance.

CEO Felipe Muñoz has a clear view on the role that lighting should play in his organization. “With the switch to Philips LED we have reduced maintenance and therefore we achieved far less disruption in our business operations. Our office is a very comfortable and productive working

environment due to the guaranteed flicker free light and the integrated new optics, which meet the office lighting norms.” Muñoz decided to take his own philosophy to heart. “We wanted our own people to benefit from the new lighting, just as we want our customers to benefit from our products.” The lighting saves up to 40% versus the traditional office lighting. This helps us to meet our sustainability goals and underlines our company’s vision.

“The quality of lighting makes our day comfortable and productive.”

Project	AllTapeSupplies
Location	Tilburg, The Netherlands
CEO	Juan Felipe Muñoz
Philips lighting solution	CoreLine Recessed CoreLine Downlight

