

AURORA[®]
L I G H T I N G

T R A D E



NEW PRODUCTS



Aurora New Products Catalogue 2024

Aurora is pleased to introduce you to a brand-new catalogue, where we unveil an array of innovative products carefully crafted to elevate Aurora's comprehensive collection.

Commitment to Quality

Our commitment to quality and variety is enhanced through the introduction of these new products which continue to bolster Aurora's portfolio. Catering to a spectrum of sectors, from the nurturing environments of Healthcare and Education to the dynamic landscapes of Commercial and Industrial spaces, the new additions seamlessly integrate with Aurora's existing range.

At Aurora, we understand the importance of reliability. That's why all our products come backed by a 3 or 5-year warranty, with the added assurance of a market-leading 3-year on-site warranty on selected products.



This latest product lineup marks a notable advancement in product development, featuring a variety of innovative designs, enhanced features, and added benefits.

Aurora Lighting - Welwyn Garden City, UK


































We take pride in not only brightening spaces but also in ensuring the longevity and performance of our lighting products.

In a move towards sustainability, and with the aim of cutting maintenance expenses and minimising waste, both the new Filante and Plaisio panels offer the flexibility to replace individual LED modules in case of failure.

Whether you're considering the groundbreaking 185lm/W Cosmos Highbay or the recently unveiled UtiliteXL Wall Pack, specifically crafted to minimise light pollution, Aurora remains at the forefront of innovation.

Visit auroralighting.com for more information.

NEW Product Range Finder

| | | | | |
|--|--|--|--|--|
| Boutica 6  38W Colour Switchable Adjustable | Apex™ 7  30W CRI90 Adjustable | Prysim™ CS 8  42W Colour Switchable Adjustable | Focus Slim II 11  10-20W Colour & Wattage Switchable | BimPro™ CS 12  32W Colour Switchable |
| Cool II 14  25/35W CRI90 | Focus 15  GU10 3-Circuit Spot | Esa Spot 16  6W Colour Switchable with PIR | Borealis 17  40W Up/Down 400mm Halo | |
| Filante 22  30W UGR16 600x600mm | Plaisio 23  30W UGR16 600x600mm | Duolite™ 24  36W UGR19 600x600mm | Versitile™ 26  30W IP65 600x600mm | Artik 27  45W UGR17 1200x200mm |
| Lineo 30  24/30/50W Surface or Suspended | Lineo 31  24/30/50W Surface or Suspended | Princeton 32  25W UGR19 1200mm | Princeton 33  25W UGR19 1200mm | |
| UtiliteXL™ 37  14-24W IP65 Colour Switchable | Givry 38  E27 IP54 Wall | Givry 39  E27 IP54 Post | Zykos 40  5/8/10W Surface Mounted | Zykos 41  5/8/10W Recessed |
| Forsythia 42  35W IP65 Post | Fusain 43  25W IP66 Colour Switchable Post | Solis 44  40/60/75/100W IP66 Column | | |
| Cosmos™ 50  80/120/150W IP65 0-10V Dimmable | Sporty 52  200W UGR19 600x420mm | Camus II 54  100/150/300W IP66 Asymmetrical | Song 55  300/400/500/800W IP66 DALI Dim | EmPac™ 56  Emergency Bulkhead |
| EmPac™ 57  Emergency Twin Spot | Filament Lamp 58  8W E27 GLS Dimmable | | | |

CEILING LIGHTS
6-17

PANELS & LINEARS
22-33

OUTDOOR LIGHTING
37-44

INDUSTRIAL LIGHTING
50-58

Ceiling Lights



FEATURE PRODUCTS




Boutica

Boutica Adjustable 38W Colour Switchable Retail Wallwasher



- Adjustable recessed wallwasher designed to highlight displays and wall features
- Colour switchable between 3000/4000/5700K
- Adjustable rotate and tilt angles to adapt to changing environments
- Producing up to 4115 lumens from 38W LED
- Rotation 330°, adjustment 75°



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L70B50 50,000hrs
- Operating Temperature: -20°C / +45°C
- Body: Aluminium & Polycarbonate
- Diffuser: Opaque Polycarbonate
- Warranty: 5 Years

| Cat No. | Type | Watts (W) | Colour Temp. (K) | Lumens (lm) | Lm/W | Beam | Cutout (mm) | Size (mm) | Finish |
|---------------|---------|-----------|------------------|-------------|------|------|-------------|-----------|--------|
| 767440 | Non Dim | 38 | 3000/4000/5700 | 3725-4115 | 108 | 90° | 160 | 195 x 135 | White |
| 767441 | Non Dim | 38 | 3000/4000/5700 | 3725-4115 | 108 | 90° | 160 | 195 x 135 | Black |



- Adjustable recessed wallwasher designed to highlight displays and wall features
- CRI90 Perfect for applications that require high quality light output
- Adjustable rotate and tilt angles to adapt to changing environments
- Producing up to 3700 lumens from 30W LED
- Rotation 350°, adjustment 35°



Technical Specifications

- Supply Voltage: 200-240 AC
- Lifespan: L80B50 50,000hrs
- Operating Temperature: -20°C / +45°C
- Body: Aluminium
- Reflector: Aluminium
- Warranty: 5 Years

| Cat No. | Type | Watts (W) | Colour Temp. (K) | Lumens (lm) | Lm/W | Beam | Cutout (mm) | Size (mm) | Finish |
|------------------------|---------|-----------|------------------|-------------|------|------|-------------|-----------|--------|
| AU-RSP345W/40 | Non Dim | 30 | 4000 | 3700 | 123 | 45° | 165 | 180 x 129 | White |
| AU-RSP345BLK/40 | Non Dim | 30 | 4000 | 3700 | 123 | 45° | 165 | 180 x 129 | Black |
| AU-RSP324W/40 | Non Dim | 30 | 4000 | 3700 | 123 | 24° | 165 | 180 x 129 | White |
| AU-RSP324BLK/40 | Non Dim | 30 | 4000 | 3700 | 123 | 24° | 165 | 180 x 129 | Black |

Prysim™ CS

Prysim™CS 42W Colour Switchable IP65 Rectangular Wallwasher





- Adjustable rectangular wallwasher designed to highlight displays and wall features
- CRI90 perfect for applications that require high quality light output
- Colour switchable between 3000/3500/4000K



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L70B50 50,000hrs
- Operating Temperature: -20°C / +45°C
- Body: Aluminium
- Diffuser: Opaque Polycarbonate
- Warranty: 5 Years

| Cat No. | Type | Watts (W) | Colour Temp. (K) | Lumens (lm) | Lm/W | Beam | Cutout (mm) | Size (mm) | Finish |
|-----------|---------|-----------|------------------|-------------|------|------|-------------|-----------------|--------|
| EN-WW42CS | Non Dim | 42 | 3000/3500/4000 | 3900-4300 | 102 | 100° | 220x130 | 235 x 145 x 120 | White |

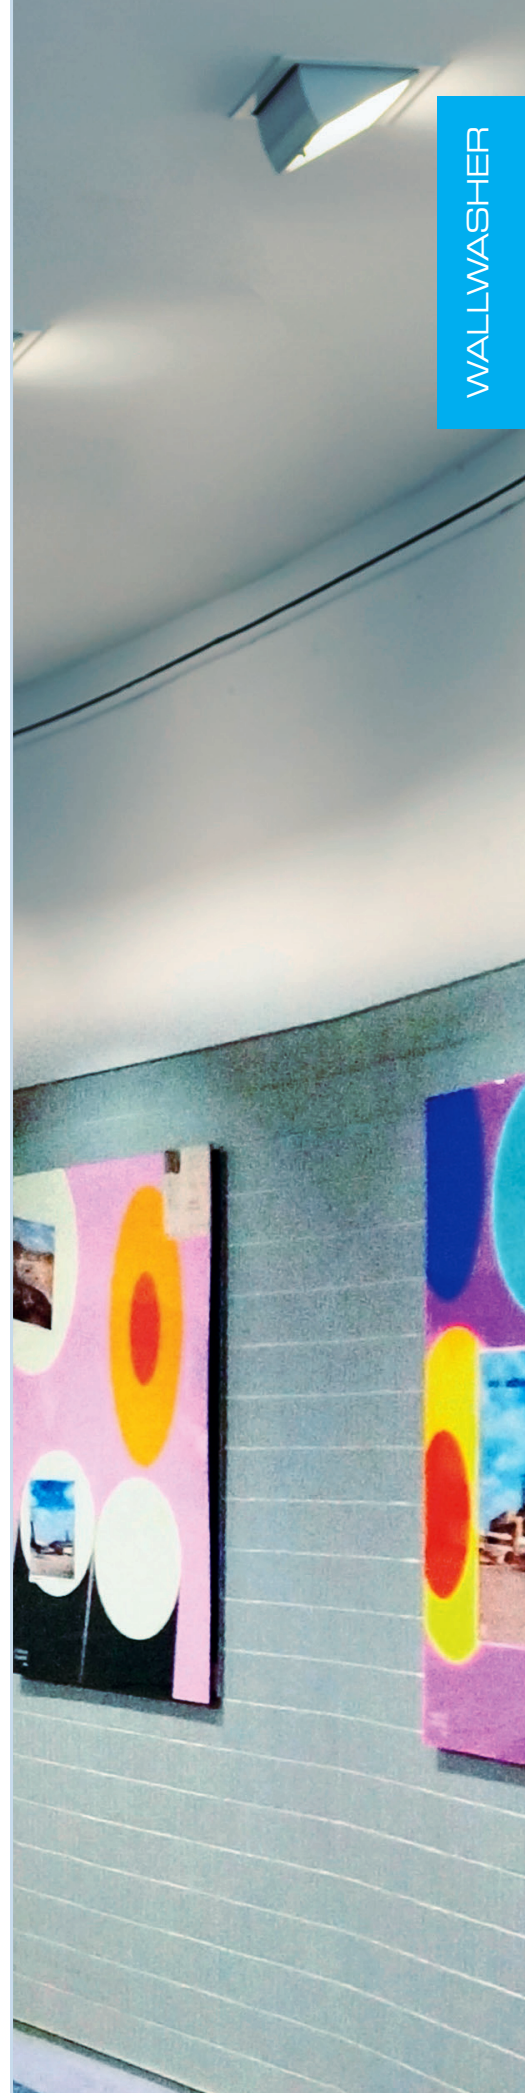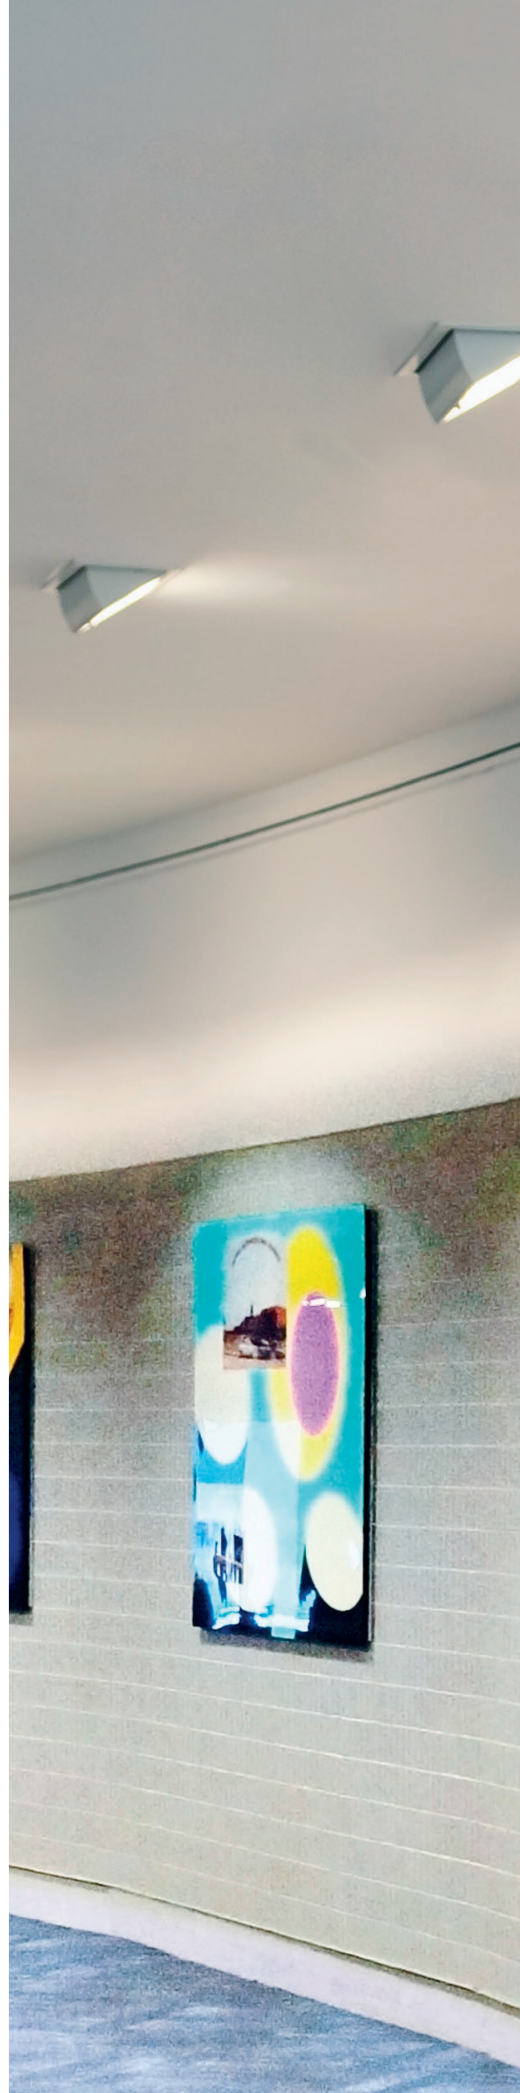

WALLWASHER

Focus Slim II

ULTIMATE DISPLAY LIGHTING FLEXIBILITY
COLOUR & WATTAGE SWITCHABLE

Up to 1900lm



ADJUSTABLE BEAM ANGLE

Focus your track lighting where its needed by simply rotating the shade to fine tune the beam angle between 24°-60°



Colour Switchable
Choose between 2700K, 4000K and 6000K



Wattage Switchable
Select 10W, 15W or 20W prior to installation



Circuit Selection
Switch spotlights between circuit 1, 2 or 3

Focus Slim II

Focus Slim II 10-20W Colour & Wattage Switchable Three Circuit Track Spotlight



- Colour and wattage switchable
- Adjustable beam angle 24° to 60°
- 350° Adjustable rotation & 180° tilt
- Compatible with industry standard Global track



Technical Specifications


- Supply Voltage: 220-240 AC
- Lifespan: L70B50 50,000hrs
- Operating Temperature: -20°C / +40°C
- Body: Aluminium
- Diffuser: Clear PMMA
- Warranty: 3 years

| Cat No. | Type | Watts (W) | Colour Temp. (K) | Lumens (lm) | Lm/W | Beam | Size (mm) | Finish |
|---------------------|---------|-----------|------------------|-------------|------|--------|----------------|--------|
| AU-TK3CWSBLK | Non Dim | 10/15/20 | 2700/4000/6000 | 900-1890 | 95 | 24-60° | 145 x 70 x 210 | Black |
| AU-TK3CWSW | Non Dim | 10/15/20 | 2700/4000/6000 | 900-1900 | 95 | 24-60° | 145 x 70 x 210 | White |

BimPro™ Colour Switchable 32W Three Circuit Track Spotlight



- Adjustable colour switchable three circuit track spotlight with slimline track adaptor
- Available in 24° and 45° beam angle with LEDs delivering up to 97lm/W.
- Colour switchable between 3000/3500/4000K



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L70B50 50,000hrs
- Operating Temperature: -20°C / +45°C
- Body: Aluminium
- Diffuser: Clear Glass
- Warranty: 5 Years

| Cat No. | Type | Watts (W) | Colour Temp. (K) | Lumens (lm) | Lm/W | Beam | Size (mm) | Finish |
|----------------|---------|-----------|------------------|-------------|------|------|-----------|--------|
| EN-TK3245CSW | Non Dim | 32 | 3000/3500/4000 | 2900-3100 | 97 | 45° | 140 x 96 | White |
| EN-TK3245CSBLK | Non Dim | 32 | 3000/3500/4000 | 2900-3100 | 97 | 45° | 140 x 96 | Black |
| EN-TK3224CSW | Non Dim | 32 | 3000/3500/4000 | 2900-3100 | 97 | 24° | 140 x 96 | White |
| EN-TK3224CSBLK | Non Dim | 32 | 3000/3500/4000 | 2900-3100 | 97 | 24° | 140 x 96 | Black |



TRACK
SYSTEMS

Cool II

Cool II 25W/35W LED Three Circuit Adjustable Track Spotlight



- 3-Circuit track spotlight with in-track driver compatible with industry standard Global track
- CRI90 offering excellent light quality
- Rotation 355°, adjustment 90°



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L80B20 30,000hrs
- Operating Temperature: -20°C / +40°C
- Body: Aluminium
- Diffuser: Clear PMMA
- Warranty: 3 Years

| Cat No. | Type | Watts (W) | Colour Temp. (K) | Lumens (lm) | Lm/W | Beam | Size (mm) | Finish |
|---------|---------|-----------|------------------|-------------|------|------|-----------|--------|
| 100224 | Non Dim | 25 | 3000 | 2750 | 110 | 24° | 155 x 75 | White |
| 100225 | Non Dim | 25 | 4000 | 2500 | 100 | 24° | 155 x 75 | White |
| 100226 | Non Dim | 35 | 3000 | 3500 | 100 | 24° | 145 x 85 | White |
| 100227 | Non Dim | 35 | 4000 | 3850 | 110 | 24° | 145 x 85 | White |
| 100228 | Non Dim | 25 | 3000 | 2500 | 100 | 24° | 155 x 75 | Black |
| 100229 | Non Dim | 25 | 4000 | 2500 | 100 | 24° | 155 x 75 | Black |
| 100230 | Non Dim | 35 | 3000 | 3500 | 100 | 24° | 145 x 85 | Black |
| 100231 | Non Dim | 35 | 4000 | 3500 | 100 | 24° | 145 x 85 | Black |

Focus GU10 Three Circuit Adjustable Track Spotlight



- 3-Circuit GU10 track spotlight compatible with industry standard Global track
- Rotation 355°, adjustment 90°
- For use with GU10 lamps - lamp not included




Technical Specifications

- Supply Voltage: 220-240 AC
- Body: Aluminium & Polycarbonate
- Warranty: 2 Years

| Cat No. | Type | Watts (W) | Size (mm) | Finish |
|-------------|---------|-----------|-----------|--------|
| 8370 | Non Dim | 7W Max | 100 x 55 | White |
| 8371 | Non Dim | 7W Max | 100 x 55 | Black |

Esa Spot

Esa Spot Fixed 6W Colour Switchable Downlight With PIR

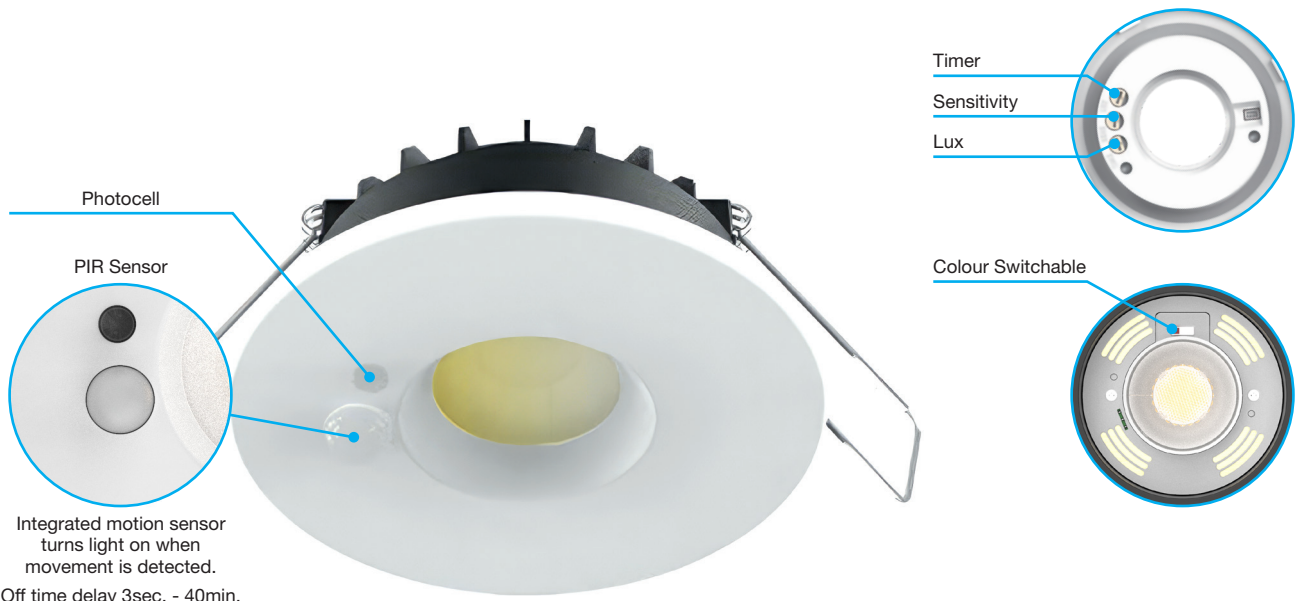

- + Adjustable PIR sensor with photocell for added control and energy savings
- Colour switchable between 2700/3000/4000K
- Suitable for use in bathrooms, corridors, storage cupboards etc.



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L80B10 50,000 hrs
- Operating Temperature: -20°C / +40°C
- Body: Aluminium & Polycarbonate
- Diffuser: Clear Polycarbonate
- Warranty: 5 Years

| Cat No. | Type | Watts (W) | Colour Temp. (K) | Lumens (lm) | Lm/W | Beam | Cutout (mm) | Size (mm) | Finish |
|---------------|------|-----------|------------------|-------------|------|------|-------------|-----------|--------|
| 100619 | Dim | 6 | 2700/3000/4000 | 510-560 | 93 | 50° | 68 | 88 x 43 | White |
| 100620 | Dim | 6 | 2700/3000/4000 | 510-560 | 93 | 50° | 68 | 88 x 43 | Black |

Borealis 40W Up/Down 400mm Halo Light



- Architectural luminaire for installation in entrance halls, interior corridors, commercial and residential areas
- Direct and indirect lighting providing a halo effect on the mounting surface
- Can be surface, suspended or rod mounted
- Loop-in loop-out 3-pole connectors, replaceable driver



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L80B10 50,000hrs
- Operating Temperature: -15°C / +35°C
- Body: Aluminium
- Diffuser: Opaque Polycarbonate
- Warranty: 5 years

| Cat No. | Type | Watts (W) | Colour Temp. (K) | Lumens (lm) | Lm/W | Beam | Size (mm) | Finish |
|---------|------------------------------------|-----------|------------------|-------------|------|------|-----------|--------|
| 300338 | Non Dim | 40 | 4000 | 4000 | 100 | 120° | 400 x 86 | Black |
| 300344 | BOREALIS Suspension Kit for 300338 | | | | | | 800 | - |
| 300345 | BOREALIS Suspension Rod for 300338 | | | | | | 500 | - |

LED Panels & Linears





FEATURE PRODUCTS



Filante

UGR16
DALI Dimmable Panel
4200lm

p22



VersiTile™

Single Colour 4000K
IP65 Panel
3900lm

p26



Lineo

Single Colour 4000K
Linear
Up to 5000lm

p30



Princeton

UGR19 School Fitting
Asymmetrical
4300lm

p32



Filante + Plaisio

BETTER FOR THE ENVIRONMENT
MORE COMFORTABLE WORKSPACES

Up to 4200lm



REPLACEABLE MODULES

Individually replaceable modules,
reducing maintenance costs

UGR<16

Perfect for technical drawing,
classrooms, boardrooms, meeting
rooms and commercial environments



Flicker-Free Drivers
DALI-2 & DALI Push
drivers with push terminals



Lightweight & Slim
Filante is lightweight and
just 18mm thick

CIRCULAR ECONOMY



Modular lighting fixtures can be designed with components that are easily replaceable and made of recyclable parts, such as drivers, controls, and LED boards.


This means that when a component fails or reaches the end of its lifetime, it can be replaced without having to dispose of the entire fitting, thus extending the useful lifespan of the luminaire beyond that of its parts.

By creating modular lighting fixtures that are serviceable and intelligent, we can reduce waste and increase the lifespan of lighting products, thus contributing to a more sustainable and circular economy.

SUSTAINABLE
EFFICIENT
COMFORT

Filante

Filante 30W LED 600 x 600mm UGR16 DALI Troffer Light

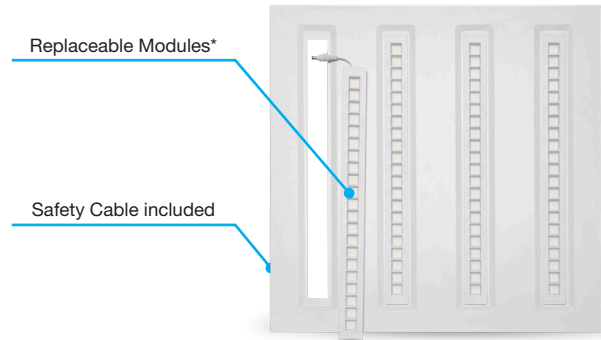

Individually replaceable LED modules, reducing maintenance costs

- UGR16 offering reduced glare for office and education environments
- DALI-2 dimmable
- Loop-in loop-out driver




Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L90B10 50,000hrs
- Operating Temperature: -25°C / +40°C
- Body: Aluminium
- Diffuser: Clear Polycarbonate
- Warranty: 5 Years

| Cat No. | Type | Watts (W) | Colour Temp. (K) | Lumens (lm) | Lm/W | Beam | Size (mm) | Finish |
|---------|--------|-----------|------------------|-------------|------|------|----------------|--------|
| 100749 | DALI-2 | 30 | 4000 | 4200 | 140 | 80° | 595 x 595 x 18 | White |

*In the unlikely event that you should need replacement modules, please contact Sales.

Plaisio 30W 600 x 600mm UGR16 4000K DALI Troffer

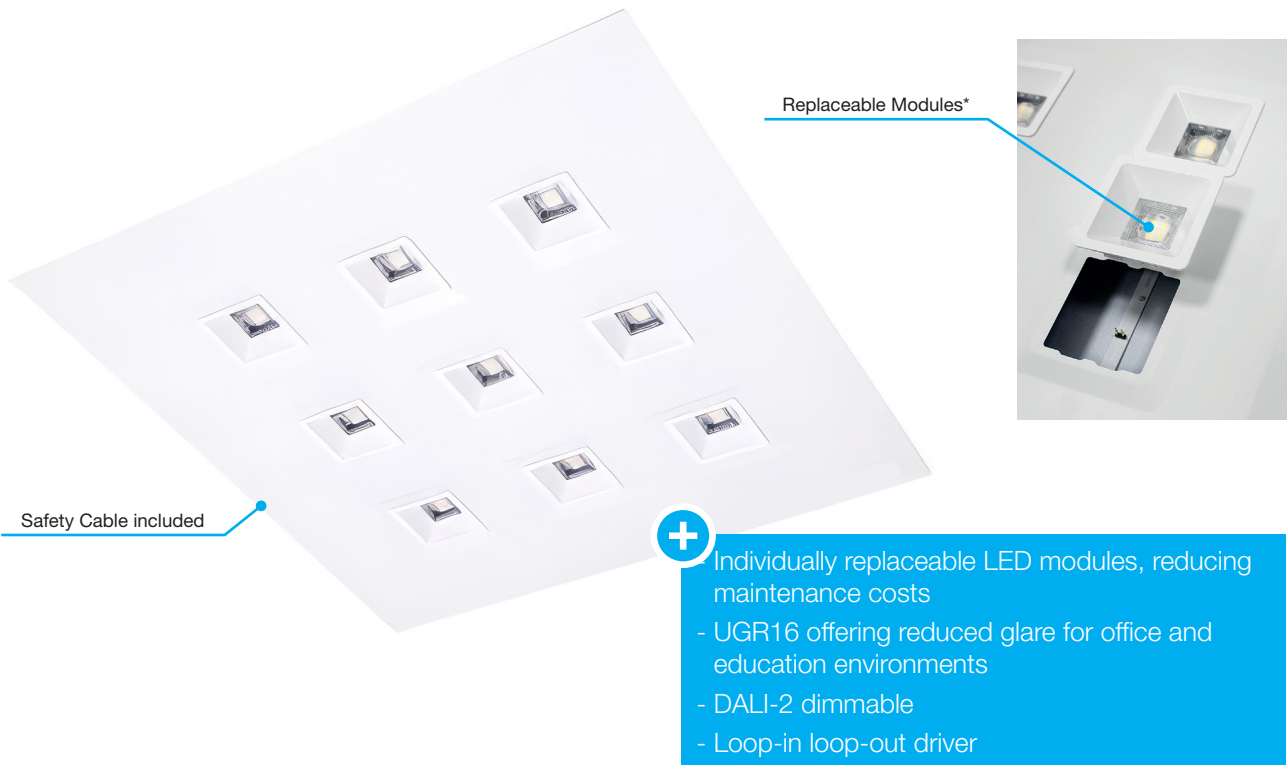

+ Individually replaceable LED modules, reducing maintenance costs

- UGR16 offering reduced glare for office and education environments
- DALI-2 dimmable
- Loop-in loop-out driver



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L90B10 50,000hrs
- Operating Temperature: -15°C / +35°C
- Body: Steel & Polycarbonate
- Diffuser: Clear Polycarbonate
- Warranty: 5 Years

| Cat No. | Type | Watts (W) | Colour Temp. (K) | Lumens (lm) | Lm/W | Beam | Size (mm) | Finish |
|---------|--------|-----------|------------------|-------------|------|------|----------------|--------|
| 302444 | DALI-2 | 30 | 4000 | 4200 | 140 | 85° | 595 x 595 x 25 | White |

*In the unlikely event that you should need replacement modules, please contact Sales.

DuoLite™

DuoLite™ 36W 600 x 600mm UGR19 Troffer



A unique LED troffer that uses back-lit technology to replicate the appearance of traditional direct/indirect luminaires

- UGR19 offering reduced glare for office environments
- Ideal for a wide range of commercial applications, including schools and offices



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L80B50 50,000hrs
- Operating Temperature: -10°C / +40°C
- Body: Aluminium
- Diffuser: Opaque Prismatic
- Warranty: 5 Years

| Cat No. | Type | Watts (W) | Colour Temp. (K) | Lumens (lm) | Lm/W | Beam | Size (mm) | Finish |
|-----------------------|----------------|-----------|------------------|-------------|------|------|----------------|--------|
| AU-TF6060/40 | Non Dim | 36 | 4000 | 3700 | 102 | 90° | 595 x 595 x 40 | White |
| AU-TF6060V/40 | 1-10V Dim | 36 | 4000 | 3700 | 102 | 90° | 595 x 595 x 40 | White |
| AU-TF6060DA/40 | DALI Dim | 36 | 4000 | 3700 | 102 | 90° | 595 x 595 x 40 | White |
| EN-DLEM5 | Emergency Pack | | | | | | | |



VersiTile™ 30W 600 x 600mm IP65 Panel



- IP65 front – suitable for use in commercial kitchens, healthcare and similar environments
- Edge-lit design provides superior light performance and uniformity, ideal for offices and commercial lighting
- High transmission diffuser drastically reduces uncomfortable glare
- Tp(a) Rated



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L80B50 50,000hrs
- Operating Temperature: -10°C / +40°C
- Body: Aluminium
- Diffuser: Opaque Polycarbonate
- Warranty: 5 years

| Cat No. | Type | Watts (W) | Colour Temp. (K) | Lumens (lm) | Lm/W | Beam | Size (mm) | Finish |
|--------------------|---|-----------|------------------|-------------|------|------|----------------|--------|
| AU-LP65A/40 | Non Dim | 30 | 4000 | 3900 | 130 | 120° | 595 x 595 x 11 | White |
| AU-EM1EX | 3 Hour Maintained Emergency Pack for Panels | | | | | | 47 x 260 x 30 | - |

Artik 45W LED 1200x200mm UGR17 Suspended Up/Down Panel Light



- Suspended fitting with up and down illumination for offices, showrooms, schools etc.
- UGR17 offering reduced glare
- Loop-in loop-out connectors



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L80B50 80,000hrs
- Operating Temperature: -15°C / +35°C
- Body: Aluminium
- Diffuser: Prismatic PMMA
- Warranty: 5 Years

| Cat No. | Type | Watts (W) | Colour Temp. (K) | Lumens (lm) | Lm/W | Beam | Size (mm) | Finish |
|---------|---------|-----------|------------------|-------------|------|------|-----------------|---------|
| 300232 | Non Dim | 45 | 4000 | 5300 | 117 | 120° | 1210 x 200 x 37 | RAL9006 |

Lineo + Princeton

PERFECT FOR RETROFIT

LOW UGR FOR REDUCED GLARE

Up to 5000lm



Lineo PRYSMATIC POLYCARBONATE DIFFUSER



Lineo POLYCARBONATE REFLECTOR



Princeton OPAQUE POLYCARBONATE DIFFUSER

EDUCATION & OFFICES



Good lighting is essential for creating a comfortable and productive environment in both offices and educational institutions.

In offices, the right lighting solutions can have a crucial impact on the way employees think, feel, and work, transforming the wellbeing and productivity of your workplace.

In educational institutions, proper lighting systems can create an optimal visual setting that is conducive to learning.


The right lighting conditions encourage a comfortable and vibrant environment.



Prysmatic Diffuser



Reflector



Opaque Diffuser

Lineo

Lineo Surface or Suspended Linear



- High quality extruded aluminium body
- May be surface mounted or suspended
- Suspension kit included



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L70B50 50,000hrs
- Operating Temperature: -20°C / +45°C
- Body: Aluminium
- Diffuser: Prismatic Polycarbonate
- Warranty: 5 Years

| Cat No. | Type | Watts (W) | Colour Temp. (K) | Lumens (lm) | Lm/W | Beam | Size (mm) | Finish |
|--------------|---------|-----------|------------------|-------------|------|------|----------------|--------|
| 75756 | Non Dim | 24 | 4000 | 3000 | 125 | 60° | 600 x 63 x 78 | White |
| 75757 | Non Dim | 30 | 4000 | 3600 | 120 | 60° | 1200 x 63 x 78 | White |

Lineo Surface or Suspended UGR19 Linear



Polycarbonate Reflector

- + UGR19 offering reduced glare for office environments
- High quality extruded aluminium body
- Can be surface mounted or suspended
- Suspension kit included



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L70B50 50,000hrs
- Operating Temperature: -20°C / +45°C
- Body: Aluminium
- Polycarbonate Reflector
- Warranty: 5 Years

| Cat No. | Type | Watts (W) | Colour Temp. (K) | Lumens (lm) | Lm/W | Beam | Size (mm) | Finish |
|---------------|---------|-----------|------------------|-------------|------|------|----------------|--------|
| 75758 | Non Dim | 24 | 4000 | 3000 | 125 | 60° | 600 x 50 x 70 | Black |
| 75759 | Non Dim | 30 | 4000 | 3600 | 120 | 60° | 1200 x 50 x 70 | Black |
| 100156 | Non Dim | 50 | 4000 | 5000 | 100 | 60° | 1430 x 50 x 70 | Black |

Princeton

Princeton 25W UGR19 1200mm Asymmetrical Cornice Linear



Suitable for use in education and healthcare environments

- UGR19 offering reduced glare
- Asymmetrical light output



Technical Specifications

- Supply Voltage: 200-240 AC
- Lifespan: L80B50 50,000hrs
- Operating Temperature: -20°C / +40°C
- Body: Polycarbonate & Aluminium
- Diffuser: Opaque Polycarbonate
- Warranty: 5 Years

| Cat No. | Type | Watts (W) | Colour Temp. (K) | Lumens (lm) | Lm/W | Beam | Size (mm) | Finish |
|---------|---------|-----------|------------------|-------------|------|------|----------------|--------|
| 100105 | Non Dim | 25 | 4000 | 4300 | 172 | 110° | 1225 x 95 x 90 | White |

Princeton 25W UGR19 1200mm Asymmetrical Linear



Suitable for use in education and healthcare environments

- UGR19 offering reduced glare
- Asymmetrical light output



Technical Specifications

- Supply Voltage: 200-240 AC
- Lifespan: L70B50 50,000hrs
- Operating Temperature: -20°C / +40°C
- Body: Polycarbonate & Aluminium
- Diffuser: Opaque Polycarbonate
- Warranty: 5 Years

| Cat No. | Type | Watts (W) | Colour Temp. (K) | Lumens (lm) | Lm/W | Beam | Size (mm) | Finish |
|---------|---------|-----------|------------------|-------------|------|------|-----------------|--------|
| 100106 | Non Dim | 25 | 4000 | 3700 | 148 | 110° | 1250 x 245 x 90 | White |

Outdoor Lighting



FEATURE PRODUCTS



UtiliteXL™

Colour & Wattage Switchable
IP65 Wall Pack
Up to 3150lm

p37



Givry

E27 Wall Lantern
IP54 Rated
Max. Lamp Wattage 18W

p38-39



Fusain

Colour Switchable
IP66 Post Light
Up to 2500lm

p43



Solis

Single Colour 2700K
Column Head
Up to 13000lm

p44

VERSATILE & EASY TO INSTALL COLOUR & WATTAGE SWITCHABLE

Up to 3150lm



MULTIPLE CABLE ENTRIES


Cable and conduit entry points at the rear, side and top for ease of installation



Colour Switchable
Choose between 3000K, 4000K and 6500K



Wattage Switchable
Select 14W, 17W, 21W or 24W prior to installation



Photocell Option
Automatically turn lights on only when needed

UtiliteXL™ 14W-24W IP65 Colour & Wattage Switchable Wall Pack



- Colour & wattage switchable LED wall pack
- Suitable for external security and perimeter lighting
- Photocell version plus plug and play emergency pack available
- Rear, side and top cable or conduit entries



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L70B50 50,000hrs
- Operating Temperature: -20°C / +45°C
- Body: Polycarbonate
- Diffuser: Opaque Polycarbonate
- Warranty: 5 years

| Cat No. | Type | Watts (W) | Colour Temp. (K) | Lumens (lm) | Lm/W | Beam | Size (mm) | Finish |
|----------------------|-------------------------------|-------------|------------------|-------------|------|------|-----------------|--------|
| AU-WP103CWS | Non Dim | 14/17/21/24 | 3000/4000/6500 | 1700-3150 | 131 | 120° | 309 x 162 x 217 | Black |
| AU-WP103CWSPH | Photocell | 14/17/21/24 | 3000/3000/6500 | 1700-3150 | 131 | 120* | 309 x 162 x 217 | Black |
| AU-EM4 | Emergency Pack for UtiliteXL™ | | | | | | | |

Givry IP54 E27 Wall Lantern

+



E27 LAMPS
THE PERFECT MATCH

GLS Filament Lamps
See p58




- Contemporary design
- Create a warm atmosphere within your home or garden
- Ideal for use with a wide range of E27 lamps



Technical Specifications

- Supply Voltage: 220-240 AC
- Body: Aluminium & Polycarbonate
- Diffuser: Clear Glass
- Warranty: 3 years

| Cat No. | Type | Watts (W) | Size (mm) | Finish |
|---------|------|-----------|-----------------|----------|
| 100483 | E27 | Max 18W | 108 x 108 x 336 | Graphite |

Givry IP54 E27 Post Lantern

+



E27 LAMPS
THE PERFECT MATCH

GLS Filament Lamps
See p58




- Contemporary design
- Create a warm atmosphere within your home or garden
- Ideal for use with a wide range of E27 lamps



Technical Specifications

- Supply Voltage: 220-240 AC
- Body: Aluminium & Polycarbonate
- Diffuser: Clear Glass
- Warranty: 3 years

| Cat No. | Type | Watts (W) | Size (mm) | Finish |
|---------|------|-----------|-----------------|----------|
| 100484 | E27 | Max 18W | 108 x 108 x 240 | Graphite |

Zykos Surface Mounted IP65 Wall Lights



Surface mount low level floor washer for use in entrance halls, corridors, stairways etc.

- 60° asymmetric beam angle
- IK09 rated for use in harsh outdoor environments



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L80B10 50,000hrs
- Operating Temperature: -15°C / +30°C30
- Body: Aluminium
- Diffuser: Opaque Polycarbonate
- Warranty: 5 Years

| Cat No. | Type | Watts (W) | Colour Temp. (K) | Lumens (lm) | Lm/W | Beam | Size (mm) | Finish | Shape |
|---------|---------|-----------|------------------|-------------|------|------|----------------|--------|-------------|
| 301814 | Non Dim | 5 | 2900 | 220 | 44 | 60° | 114 x 37 | Black | Round |
| 301815 | Non Dim | 8 | 2900 | 400 | 50 | 60° | 180 x 35 | Black | Round |
| 301816 | Non Dim | 5 | 2900 | 220 | 44 | 60° | 114 x 114 x 37 | Black | Square |
| 301817 | Non Dim | 8 | 2900 | 400 | 50 | 60° | 180 x 180 x 35 | Black | Square |
| 301818 | Non Dim | 5 | 2900 | 220 | 44 | 60° | 180 x 114 x 35 | Black | Rectangular |
| 301819 | Non Dim | 10 | 2900 | 500 | 50 | 60° | 250 x 114 x 35 | Black | Rectangular |

Zykos Recessed Mounted IP65 Wall Lights



Recess mount low level floor washer for use in entrance halls, corridors, stairways etc.

- 60° asymmetric beam angle
- IK09 rated for use in harsh outdoor environments



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L80B10 50,000hrs
- Operating Temperature: -15°C / +30°C
- Body: Aluminium
- Diffuser: Opaque Polycarbonate
- Warranty: 5 Years

| Cat No. | Type | Watts (W) | Colour Temp. (K) | Lumens (lm) | Lm/W | Beam | Cutout (mm) | Size (mm) | Finish | Shape |
|---------|---------|-----------|------------------|-------------|------|------|-------------|----------------|--------|-------------|
| 301820 | Non Dim | 5 | 2900 | 220 | 44 | 60° | 130 | 135 x 78 | Black | Round |
| 301821 | Non Dim | 8 | 2900 | 400 | 50 | 60° | 196 | 196 x 78 | Black | Round |
| 301822 | Non Dim | 5 | 2900 | 220 | 44 | 60° | 130x130 | 136 x 136 x 78 | Black | Square |
| 301823 | Non Dim | 8 | 2900 | 400 | 50 | 60° | 195x195 | 201 x 201 x 78 | Black | Square |
| 301824 | Non Dim | 5 | 2900 | 220 | 44 | 60° | 196x130 | 196 x 130 x 78 | Black | Rectangular |
| 301825 | Non Dim | 10 | 2900 | 500 | 50 | 60° | 266x130 | 271 x 135 x 78 | Black | Rectangular |

Forsythia

Forsythia 35W IP65 Post Light



+ Suitable for residential and commercial applications

- Illuminate walkways, parking areas, and other outdoor spaces
- Ideal for highlighting landscaping or architectural features



Technical Specifications

- Supply Voltage: 100-240 AC
- Lifespan: L80B10 30,000hrs
- Operating Temperature: -20°C / +45°C
- Body: Aluminium
- Diffuser: Clear Polycarbonate
- Warranty: 2 Years


| Cat No. | Type | Watts (W) | Colour Temp. (K) | Lumens (lm) | Lm/W | Beam | Size (mm) | Finish |
|--------------|---------|-----------|------------------|-------------|------|------|------------|----------|
| 70806 | Non Dim | 35 | 3000 | 2800 | 80 | 150° | 167 x 1018 | Graphite |
| 70807 | Non Dim | 35 | 4000 | 3150 | 90 | 150° | 167 x 1018 | Graphite |

Fusain 25W IP66 Colour Switchable Post Light



Suitable for residential and commercial applications

- Colour switchable between 3000/4000/5000K
- Ideal for highlighting landscaping or architectural features



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L70B50 50,000hrs
- Operating Temperature: -30°C / +45°C
- Body: Aluminium, Polycarbonate
- Diffuser: Clear Polycarbonate
- Warranty: 5 Years

| Cat No. | Type | Watts (W) | Colour Temp. (K) | Lumens (lm) | Lm/W | Beam | Size (mm) | Finish |
|---------------|---------|-----------|------------------|-------------|------|------|-----------------|--------|
| 100343 | Non Dim | 25 | 3000/4000/5000 | 2300-2500 | 100 | 150° | 133 x 200 x 975 | Black |
| 100342 | Non Dim | 25 | 3000/4000/5000 | 2300-2500 | 100 | 150° | 133 x 200 x 475 | Black |

Solis Asymmetrical IP66 Column Head



- Asymmetrical beam ideal for commercial applications, car parks & roads
- ZHAGA base connection
- Complies with light pollution directive (ULOR 0% 2700K)
- 500 Hours salt spray tested



Technical Specifications

- Supply Voltage: 120-277 AC
- Lifespan: L80B10 100,000hrs
- Operating Temperature: -20°C / +50°C
- Body: Aluminium
- Diffuser: Clear Polycarbonate
- Warranty: 5 Years

| Cat No. | Type | Watts (W) | Colour Temp. (K) | Lumens (lm) | Lm/W | Beam | Post Diameter (mm) | Size (mm) | Finish |
|---------|------|-----------|------------------|-------------|------|------------|--------------------|-----------|------------|
| 302512 | Dim | 40 | 2700 | 5200 | 130 | Asymmetric | 60 | 476 x 410 | Anthracite |
| 302513 | Dim | 60 | 2700 | 7800 | 130 | Asymmetric | 60 | 476 x 410 | Anthracite |
| 302514 | Dim | 75 | 2700 | 9750 | 130 | Asymmetric | 60 | 476 x 410 | Anthracite |
| 302515 | Dim | 100 | 2700 | 13000 | 130 | Asymmetric | 60 | 476 x 410 | Anthracite |



Industrial Lighting



FEATURE PRODUCTS



Cosmos™

Single Colour 4000K
0-10V Dimmable Highbay
Up to 27750lm

p50-51



Sporty

Single Colour 4000K
UGR19 Lowbay
28000lm

p52



Camus II

Asymmetrical
IP66 Floodlight
Up to 40500lm

p54




EmPac™

Emergency Bulkhead
Manual & Self Test
Up to 250lm

p56

MARKET LEADING EFFICIENCY 185LM/W PLUG & PLAY ACCESSORIES

Up to 27750lm

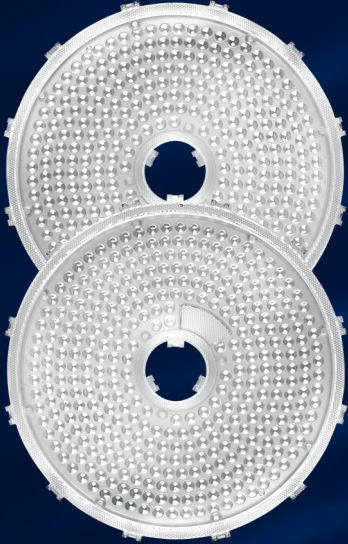

CHANGEABLE LENSES


The Cosmos™ highbay has a 110° beam angle as standard, but with the option of user-replaceable 60° and 90° lenses (sold separately)

MICROWAVE OR PIR SENSORS


The range also comes with ZHAGA plug-in microwave and PIR sensors and is 0-10V dimmable for added control



Example Sensor Installation



Motion Detected
Lighting comes on at 100%



After Hold Time
Lighting dims if no further movement is detected




After Standby Period
Lighting switches off if no motion is detected

CLASS B ENERGY RATED



The 185lm/W Cosmos™ highbay range is a highly efficient lighting solution that delivers the same lumens as traditional 100/150/200W highbays for up to 25% less power.

This means that you can replace a traditional 100W highbay with an 80W Cosmos, 150W with 120W and 200W with 150W.



Up to 15m Detection Range

Microwave sensor option provides detection range of 15m (PIR 12m) and 108°



0-10V Dimmable

A consistent form of dimming down to 10% of the product's output, all the way up to 100%



PIR & Microwave Sensors

The Cosmos highbay range also comes with ZHAGA plug-in microwave and PIR sensors and is 0-10V dimmable for added control



Microwave Sensing Control

A single remote can program multiple units together for an energy saving solution with the microwave sensor Cosmos™

Cosmos™ 80/120/150W IP65 0-10V Dimmable Highbay



- Highly efficient 185lm/W delivering the same lumens as traditional 100/150/200W highbays for up to 25% less power
- With 0-10V dimmable driver



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L80B10 50,000hrs
- Operating Temperature: -40°C / +50°C
- Body: Aluminium
- Diffuser: Opaque Polycarbonate
- Warranty: 5 years

| Cat No. | Type | Watts (W) | Colour Temp. (K) | Lumens (lm) | Lm/W | Beam | Size (mm) | Finish |
|-----------------------|-----------|-----------|------------------|-------------|------|------|-----------|--------|
| AU-HBD80/40 | 0-10V Dim | 80 | 4000 | 14800 | 185 | 110° | 245 x 115 | Black |
| AU-HBD120/40 | 0-10V Dim | 120 | 4000 | 22200 | 185 | 110° | 266 x 120 | Black |
| AU-HBD150/40 | 0-10V Dim | 150 | 4000 | 27750 | 185 | 110° | 266 x 120 | Black |
| AU-HBD80EM/40 | Emergency | 80 | 4000 | 14800 | 185 | 110° | 245 x 115 | Black |
| AU-HBD120EM/40 | Emergency | 120 | 4000 | 22200 | 185 | 110° | 266 x 120 | Black |
| AU-HBD150EM/40 | Emergency | 150 | 4000 | 27750 | 185 | 110° | 266 x 120 | Black |

Cosmos™ Dimmable Highbay Accessories



AU-HBD60A / AU-HBD60B 60° Lens
AU-HBD90A / AU-HBD90B 90° Lens



AU-HBDPIR PIR Sensor
AU-HBDMSC Microwave Sensor
AU-HBDRC Remote for Sensor



AU-HBDMB
Surface Mounting Bracket



- ZHAGA base for plug in microwave or PIR sensors
- Optional changeable 60° and 90° lenses

| Cat No. | Description |
|------------------|--|
| AU-HBD90A | 90° Lens for Cosmos™ AU-HBD80 |
| AU-HBD90B | 90° Lens for Cosmos™ AU-HBD120 & AU-HBD150 |
| AU-HBD60A | 60° Lens for Cosmos™ AU-HBD80 |
| AU-HBD60B | 60° Lens for Cosmos™ AU-HBD120 & AU-HBD150 |
| AU-HBDMB | Mounting Bracket for Cosmos™ |
| AU-HBDPIR | PIR Sensor for Cosmos™ |
| AU-HBDMSC | Microwave Sensor for Cosmos™ |
| AU-HBDRC | Remote Controller for AU-HBDMSC Microwave Sensor |

Sporty

Sporty 200W 600 x 420mm UGR19 Lowbay



- Lowbay fittings for industrial and sports lighting
- UGR19 for reduced glare
- Includes suspension kit



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L70B50 30,000hrs
- Operating Temperature: -25°C / +45°C
- Body: Aluminium & Polycarbonate
- Diffuser: Opaque Polycarbonate
- Warranty: 2 Years

| Cat No. | Type | Watts (W) | Colour Temp. (K) | Lumens (lm) | Lm/W | Beam | Size (mm) | Finish |
|---------|---------|-----------|------------------|-------------|------|------|----------------|--------|
| 800107 | Non Dim | 200 | 4000 | 28000 | 140 | 90° | 600 x 420 x 52 | White |



Camus II

Camus II Asymmetrical IP66 Floodlight



- Asymmetric beam angle to minimise unwanted light pollution, ideal for industrial and commercial environments
- Supplied with 1.5m H05RNF 3G1 Cable + IP68 16A Connector
- Heat tempered glass lens



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L80B10 50,000hrs
- Operating Temperature: -25°C / +45°C
- Body: Aluminium
- Diffuser: Clear Glass
- Warranty: 5 Years

| Cat No. | Type | Watts (W) | Colour Temp. (K) | Lumens (lm) | Lm/W | Beam | Size (mm) | Finish |
|---------|---------|-----------|------------------|-------------|------|------------|----------------|--------|
| 302222 | Non Dim | 100 | 4000 | 13500 | 135 | Asymmetric | 315 x 245 x 57 | Black |
| 302411 | Non Dim | 150 | 4000 | 20250 | 135 | Asymmetric | 365 x 290 x 57 | Black |
| 302412 | Non Dim | 200 | 4000 | 27000 | 135 | Asymmetric | 421 x 379 x 57 | Black |
| 302413 | Non Dim | 300 | 4000 | 40500 | 135 | Asymmetric | 530 x 444 x 60 | Black |

Song IP66 DALI Floodlight



High power wattage to illuminate larger spaces ideal for sports Facilities, industrial and commercial environments

- DALI Dimmable
- Supplied with IP68 connector



Technical Specifications


- Supply Voltage: 100-277 AC
- Lifespan: L80B50 80,000hrs
- Operating Temperature: -35°C / +45°C
- Body: Aluminium
- Diffuser: Opaque PMMA
- Warranty: 5 Years

| Cat No. | Type | Watts (W) | Colour Temp. (K) | Lumens (lm) | Lm/W | Beam | Size (mm) | Finish |
|---------------|----------|-----------|------------------|-------------|------|------|-----------------|--------|
| 301604 | DALI Dim | 300 | 5000 | 42000 | 140 | 60° | 599 x 283 x 130 | Black |
| 301610 | DALI Dim | 400 | 5000 | 56000 | 140 | 60° | 599 x 360 x 130 | Black |
| 301615 | DALI Dim | 500 | 5000 | 60000 | 120 | 60° | 599 x 360 x 130 | Black |
| 302418 | DALI Dim | 800 | 5000 | 112000 | 140 | 60° | 599 x 720 x 130 | Black |

3W IP65 Emergency Bulkhead



Recess Accessory

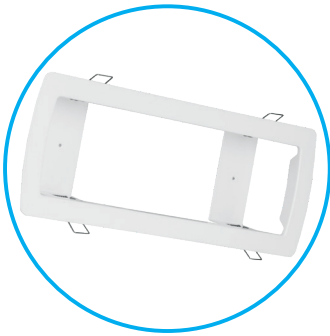

- 3 Hours emergency backup duration with LifePO4 battery
- Can be maintained or non-maintained dependent on connection of switched live
- ISO standard emergency legends included: Up, Down, Left and Right



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L70B20 25,000hrs
- Operating Temperature: -5°C / +40°C
- Body: Polycarbonate
- Diffuser: Clear Polycarbonate
- Warranty: 5 years

| Cat No. | Type | Watts (W) | Colour Temp. (K) | Lumens (lm) | Lm/W | Beam | Cutout (mm) | Size (mm) | Finish |
|------------------|-------------------------------------|-----------|------------------|-------------|------|------|-------------|----------------|--------|
| EN-EMBH | Manual Test | 3 | 6500 | 250 | 83 | 120° | - | 352 x 59 x 110 | White |
| EN-EMBHST | Self Test | 3 | 6500 | 250 | 83 | 120° | - | 352 x 59 x 110 | White |
| AU-EMBHRK | Emergency Bulkhead Recess Accessory | | | | | | 350 x 125 | 393 x 40 x 150 | White |

3W or 5W IP65 Emergency Twin Spot



- 3 Hours emergency backup duration with LifePO4 battery
- Can be maintained or non-maintained dependent on connection of switched live
- Twin spot heads have a horizontal adjustable of 180° and a vertical adjustment of 70°



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L70B50 25,000hrs
- Operating Temperature: -5°C / +40°C
- Body: Polycarbonate
- Diffuser: Clear Polycarbonate
- Warranty: 5 years

| Cat No. | Type | Watts (W) | Colour Temp. (K) | Lumens (lm) | Lm/W | Beam | Size (mm) | Finish |
|------------------|-------------|-----------|------------------|-------------|------|------|----------------|--------|
| EN-EMTS | Manual Test | 3 (2x1.5) | 6500 | 400 | 133 | 120° | 300 x 47 x 290 | White |
| EN-EMTSST | Self Test | 5 (2x2.5) | 6500 | 400 | 80 | 120° | 300 x 47 x 290 | White |

Filament Lamp

8W GLS E27 Dimmable Filament Lamp



- Ideal for decorative light fittings, outdoor lanterns etc.
- Triac dimmable
- Golden finish option available



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L70B50 30,000hrs
- Operating Temperature: -25°C / +45°C
- Body: Aluminium
- Diffuser: Clear/Golden Glass
- Warranty: 2 Years

| Cat No. | Type | Watts (W) | Colour Temp. (K) | Lumens (lm) | Lm/W | Beam | Base | Size (mm) | Finish |
|---------|------|-----------|------------------|-------------|------|------|------|-----------|--------|
| 71461 | Dim | 8 | 2700 | 806 | 100 | 300° | E27 | 60 x 110 | Clear |
| 100003 | Dim | 8 | 2700 | 720 | 90 | 300° | E27 | 60 x 108 | Golden |



AURORA[®]
L I G H T I N G

T R A D E

Head Office & Distribution

6 Little Burrow, Burrowfield
Welwyn Garden City
AL7 4SW
United Kingdom

Tel: 01707 228 700

Fax: 0800 8030 519



SCAN
TO VISIT

auroralighting.com

A **G**alaeed Group Company

AURORA
LIGHTING


ELECTRA


**EURO
POLE**


HOP
lights

MIIDEX
LIGHTING