

electrium



Crabtree

Starbreaker
Miniature SPD
Overvoltage Protection Device

MINIATURE SPD FOR SURGE PROTECTION IN DOMESTIC HOUSEHOLD PREMISES

SINGLE MODULE SPD

At just **18mm wide** this miniature SPD leaves more ways for household circuits and allows the most compact consumer unit to be used.

FULLY RATED 100A

No need for an additional back up device in the consumer unit.

SIMPLE TO INSTALL

Plugs directly onto the busbar (just like a Starbreaker MCB) Instantly connecting it to the busbar.

LESS WIRING

Fewer cable links to connect than alternative products, which speeds up installation (supplied with cables).

TYPE 2 SURGE PROTECTION

With status indicator and volt free contacts for remote monitoring and/or signalling.

SECURE CARTRIDGE ASSEMBLY

Once Installed, cartridges are securely locked into place and cannot be removed for replacement without use of a tool.


CERTIFIED AS FULLY COMPLIANT

Crabtree single module SPDs are designed, manufactured & tested to IEC EN61643-11 and certified as compliant.

RETROFIT COMPATIBLE

Fits all Starbreaker consumer units*. Supplied with a retrofit circuit icons label pack.


* Not suitable for Dual RCD configurations

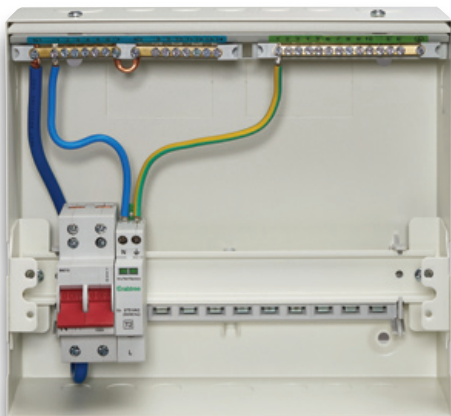

Starbreaker Main Switch Consumer Unit



SBT2SPD3W/1



CRT2SPD/P

SURGE PROTECTION DEVICE

CAT REF	DESCRIPTION
SBT2SPD3W/1	Miniature Type 2 SPD

- Suitable for all Single Phase 3 Wire Systems TN-C-S, TN-S and TT
- Clear Indication of device status
- Fitted with remote signalling contact
- Starbreaker device with plug-in busbar connection
- Suitable for use in Main Switch, Split Load & Hi-Integrity consumer unit configurations
- Not suitable for Dual RCD configurations

Alternative SPD products are available for Dual RCD consumer unit installations. Please contact Crabtree technical for further assistance.

TECHNICAL DATA

Product Standard	IEC EN 61643-11
Nominal discharge surge current (8/20) μs	20kA
Short-circuit breaking capacity (Iscbr)	25kA
Max. continuous voltage AC	275V
Max. discharge surge current (8/20) μs	40kA
Voltage protection level	1.3 kV
Voltage protection level L-N	1.3 kV
Voltage protection level N-PE	1.3 kV
Degree of protection	IP20
Dimensions	Height 85mm x Width 18mm x Depth 70mm

REPLACEMENT PLUG-IN CARTRIDGE

CAT REF	DESCRIPTION
CRT2SPD/P	Replacement Plug-in Cartridge for SBT2SPD3W/1

- Combined Metal Oxide Varistor (L1 & N) and Gas Discharge Tube (N & E)



ELECTRIUM SALES LIMITED

A SIEMENS COMPANY

Commercial Centre, Lakeside Plaza,
Walkmill Lane, Bridgtown,
Cannock WS11 0XE.
eMail: info@electrium.co.uk

www.electrium.co.uk

UK SALES

Telephone: 01543 455010
Facsimile: 01543 455011
eMail: crabtree.sales@electrium.co.uk

TECHNICAL

Telephone: 01543 438310
Facsimile: 01543 438311
eMail: crabtree.technical@electrium.co.uk

EXPORT SALES

Telephone: +44 1543 455049
Facsimile: +44 1543 455048
eMail: export@electrium.co.uk

DUBAI OFFICE

Telephone: +971 4 3660684
Facsimile: +971 4 3660676
eMail: export@electrium.co.uk



 [@ElectriumNews](https://twitter.com/ElectriumNews) or download the APP

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Users should always consult the installations instructions, IET wiring regulations and all other relevant documents, and not solely rely on information in this catalogue.

Publication No. B2609 09/2021