
PRODUCT OVERVIEW

Indulux

Reinforcing industrial design environments







INDULUX ESCAPE ROUTE SIGNALISATION

Rugged for the factory – sleek enough for the office. Stainless steel tubular luminaires resist dust and water with easy-to-maintain sliding covers, even in extreme conditions. Durable LED lighting that's easy to install and looks great anywhere you need to mark the way to safety. Indulux: reinforcing industrial design environments.



316L Stainless steel


Indulux

Industrial & design

Indulux

Easy to install

Mounting, wiring and
expanding flexibility

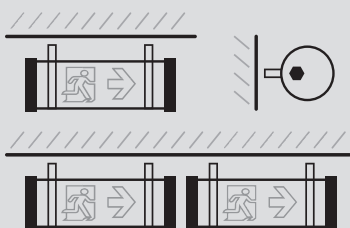

Indulux

Reliable in extreme conditions


Stainless steel solution
resisting dust & water (IP68)



Indulux

Speed up your projects

Rapid maintenance with
sliding electronic base module

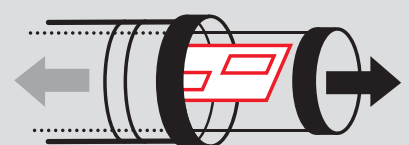


Indulux escape route signalisation

Industrial & design



Indulux escape route signalisation

- **Easy to install**
Mounting, wiring and expanded flexibility
- **Reliable in extreme conditions**
Stainless steel solution resisting dust and water (IP68)
- **Speed up your projects**
Rapid maintenance with sliding electronic base module

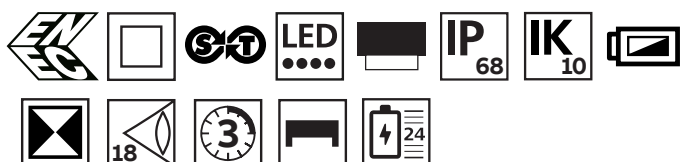

Luminaire


Order Code	Input voltage	Description	Lamp type	Power consumption (VA/W)		Operation duration (hrs)	Environment Temperature (°C)	Weight (kg)
IND3LS5	230 Vac, 50 Hz	Indulux LED S/S M3 ST	1x LED 4W	3.5W / 7.5VA (M)	1.8W / 4.5VA (NM)	3	0....+40	1.6
IND3LS5DS	230 Vac, 50 Hz	Indulux LED D/S M3 ST	2x LED 4W	7W / 15 VA (M)	3.9 W / 9 VA (NM)	3	0....+40	2
CTIND3LS5	230 Vac, 50 Hz	Indulux LED S/S M3 CT	1x LED 4W	3.5W / 7.5VA (M)	1.8W / 4.5VA (NM)	3	0....+40	1.6
CTIND3LS5DS	230 Vac, 50 Hz	Indulux LED D/S M3 CT	2x LED 4W	7W / 15 VA (M)	3.9 W / 9 VA (NM)	3	0....+40	2
IND1LS5	230 Vac, 50/60 Hz	Indulux S/S 230V Slave	1x LED 4W	6.5W 7VA, Inrush current 2A		N/A	0....+40	1.4
IND1LS5DS	230 Vac, 50/60 Hz	Indulux LED D/S 230V Slave	2x LED 4W	13 W 14VA, Inrush current 4A		N/A	-20....+40	1.6
IND1LSLTC	230 Vac, 50/60 Hz	Indulux LED S/S 230V LTC	1x LED 4W	6.5W 7VA, Inrush current 2A		N/A	-20....+40	1.5
IND1LS5DSLTC	230 Vac, 50/60 Hz	Indulux LED D/S 230V LTC	2x LED 4W	13 W 14VA, Inrush current 4A		N/A	-20....+40	1.7

* Configurable pictograms included


Accessories

Order Code	Description
102601K	Indulux Cable Entry Cover Kit
102702K	Indulux Battery replacement

Indulux escape route signalisation

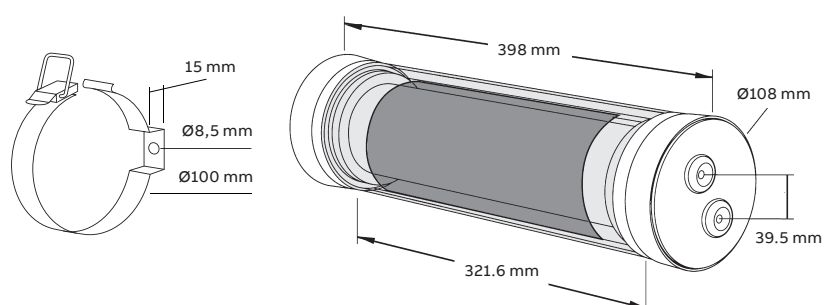


Indulux escape route lighting

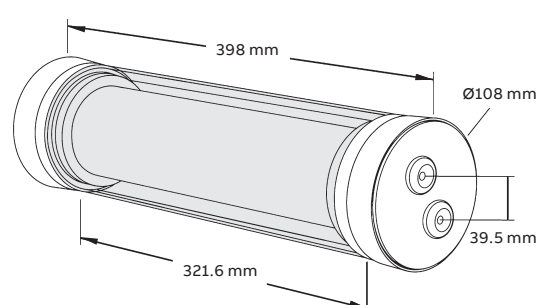




Indulux escape route lighting

Industrial & design

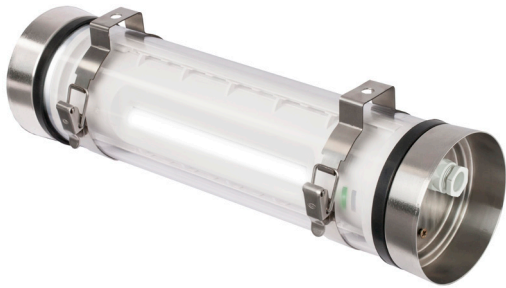

Indulux escape route lighting

- **Easy to install**
Mounting, wiring and expanded flexibility
- **Reliable in extreme conditions**
Stainless steel solution resisting dust and water (IP68)
- **Speed up your projects**
Rapid maintenance with sliding electronic base module

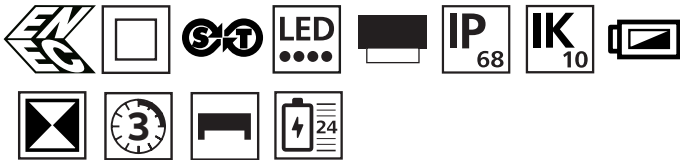

Luminaire


Order Code	Input voltage	Description	Lamp type	Power consumption (VA/W)		Operation duration (hrs)	Environment Temperature (°C)	Weight (kg)
IND3LS5	230 Vac, 50 Hz	Indulux LED S/S M3 ST	1x LED 4W	3.5W / 7.5VA (M)	1,8W / 4.5VA (NM)	3	0....+40	1.6
IND3LS5DS	230 Vac, 50 Hz	Indulux LED D/S M3 ST	2x LED 4W	7W / 15 VA (M)	3,9 W / 9 VA (NM)	3	0....+40	2
CTIND3LS5	230 Vac, 50 Hz	Indulux LED S/S M3 CT	1x LED 4W	3.5W / 7.5VA (M)	1,8W / 4.5VA (NM)	3	0....+40	1.6
CTIND3LS5DS	230 Vac, 50 Hz	Indulux LED D/S M3 CT	2x LED 4W	7W / 15 VA (M)	3,9 W / 9 VA (NM)	3	0....+40	2
IND1LS5	230 Vac, 50/60 Hz	Indulux S/S 230V Slave	1x LED 4W	6.5W 7VA, Inrush current 2A		N/A	0....+40	1.4
IND1LS5DS	230 Vac, 50/60 Hz	Indulux LED D/S 230V Slave	2x LED 4W	13 W 14VA, Inrush current 4A		N/A	-20....+40	1.6
IND1LSLTC	230 Vac, 50/60 Hz	Indulux LED S/S 230V LTC	1x LED 4W	6.5W 7VA, Inrush current 2A		N/A	-20....+40	1.5
IND1LS5DSLTC	230 Vac, 50/60 Hz	Indulux LED D/S 230V LTC	2x LED 4W	13 W 14VA, Inrush current 4A		N/A	-20....+40	1.7

* Configurable pictograms included

Accessories

Order Code	Description
102601K	Indulux Cable Entry Cover Kit
102702K	Indulux Battery replacement

Picture table



Spacing tables

Indulux S/C Single Sided LED IND3LS5 & CTIND3LS5

h (m)	1x	2x	3x	4x
2.5	3.50	9.24	3.01	7.70
3.0	3.56	9.65	3.11	8.19
3.5	3.54	9.92	3.13	8.54
4.0	3.43	10.06	3.07	8.76
4.5	3.25	10.09	2.94	8.89

Indulux Slave Single sided LED IND1LS5 & IND1LSLTC

h (m)	1x	2x	3x	4x
2.5	4.62	11.80	3.83	9.46
3.0	4.82	12.50	4.07	10.22
3.5	4.95	13.04	4.25	10.85
4.0	5.03	13.48	4.36	11.37
4.5	5.04	13.82	4.42	11.79

Indulux S/C Double Sided LED IND3LS5DS & CTIND3LS5DS

h (m)	1x	2x	3x	4x
2.5	3.89	10.70	2.39	6.31
3.0	3.81	10.91	2.36	6.60
3.5	3.62	10.94	2.23	6.74
4.0	3.25	10.82	1.96	6.74
4.5	2.50	10.54	1.49	6.59

Indulux Slave Double sided LED IND1LS5DS & IND1LS5DSLTC

h (m)	1x	2x	3x	4x
2.5	5.37	14.17	3.16	7.89
3.0	5.49	14.73	3.30	8.46
3.5	5.51	15.11	3.38	8.90
4.0	5.45	15.36	3.37	9.22
4.5	5.31	15.48	3.29	9.44

—
ABB Ltd
Electrification Products
Tower Court
Courtaulds Way
Foleshill Enterprise Park
Coventry
West Midlands
CV6 5NX
Sales Tel: +44 (0) 333 999 9900
Sales Fax: +44 (0) 333 999 9901
E-Mail: lv.enquiries@gb.abb.com

www.emergi-lite.co.uk

