




## Advantage 550C

### Chrome Multi-service Entry Electric Showers

Ideal for shower replacement and upgrades, the Advantage 550C has been developed with the very latest instantaneous shower styling, mixing traditional and contemporary functionality. Designed to stabilise temperature changes caused by water pressure fluctuations, it comes with the convenience of a push button start/stop and power selection facility. Phased shutdown is a key feature, and ensures residual hot water is flushed out reducing scale and ensuring cool-start use.

- Application** Designer showering.
- Key Features** Six pipe, six cable entry configuration (left, right, top, bottom or rear) - for highly flexible installations or replacements | Push button power selection on/off control | 3 push button power settings (cold/economy/high) | LED power indicator | Independent rotary temperature control for set and forget convenience | Flush buttons for easy clean.
- Safety Features** Fully temperature stabilised | Smart Time® phased shutdown - electronic flushing of residual hot water which reduces scale and ensures cool-start use | Phased shutdown flashing LED indicator | Overheat protection.
- Outer Casing** Chrome and black front cover | High impact | Easy clean | Thermoplastic material.
- Accessories** Chrome 6 mode rub-clean handset and full accessory kit: Soap dish | Hose with retaining ring | Riser rail | Adjustable clamp.
- Pressure** Operating pressure - 0.7bar - 7bar.
- Approvals** BEAB Approved | CE.
- Guarantee\*** 2 year product guarantee (UK).

#### Dimensions

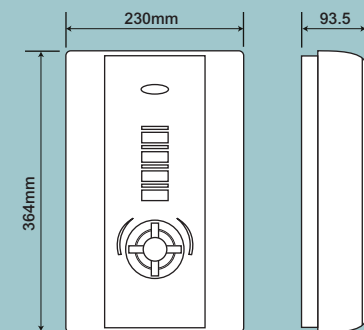

#### Technical Specification

Left or right - Top, bottom or rear entries | Fittings included | Operating water pressure 0.7-7bar (10-100psi) | Water pressure - operated power switch | Water connection - 15mm plain shank tails push fit or standard compression fittings | Removable lower section for ease of installation.

kW variant	kW loading at 230-240V	Recommended cable sizes	Recommended fuse ratings
8.5	7.8 - 8.5	6 - 10mm <sup>2</sup>	40 amps
9.5	8.7 - 9.5	6 - 10mm <sup>2</sup>	45 amps

#### Product Range

Product Reference	Short Code	Cat. No
<b>Advantage 550 Chrome 8.5kW</b>	<b>ADV5508C</b>	<b>53674205</b>
<b>Advantage 550 Chrome 9.5kW</b>	<b>ADV5509C</b>	<b>53676705</b>

\*The final year of the guarantee is only available for products registered with Redring after purchase.

8.5  
kW

9.5  
kW

2 yr  
GUARANTEE

BEAB  
Approved

CE




# Advantage 550

## White Multi-service Entry Electric Showers

Ideal for shower replacement and upgrades, the Advantage 550 has been developed with the very latest instantaneous shower styling, mixing traditional and contemporary functionality. Designed to stabilise temperature changes caused by water pressure fluctuations, it comes with the convenience of a push button start/stop and power selection facility. Phased shutdown is a key feature, and ensures residual hot water is flushed out reducing scale and ensuring cool-start use.

- Application** Family showering.
- Key Features** Six pipe, six cable entry configuration (left, right, top, bottom or rear) - for highly flexible installations or replacements | Push button power selection on/off control | 3 push button power settings (cold/economy/high) | LED power indicator | Independent rotary temperature control for set and forget convenience | Flush buttons for easy clean.
- Safety Features** Fully temperature stabilised | Smart Time® phased shutdown - electronic flushing of residual hot water which reduces scale and ensures cool-start use | Phased shutdown flashing LED indicator overheat protection.
- Outer Casing** White front cover | High impact | Easy clean | Thermoplastic.
- Accessories** Chrome 6 mode rub-clean handset and chrome oval curved style accessory kit: Soap dish | Hose with retaining ring | Riser rail | Adjustable clamp.
- Pressure** Operating pressure - 0.7bar - 7bar.
- Approvals** BEAB Approved | CE.
- Guarantee\*** 2 year product guarantee (UK).

### Dimensions

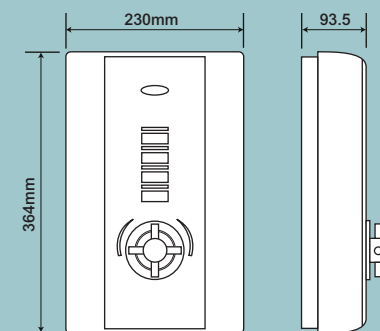

### Technical Specification

Left or right - Top, bottom or rear entries | Fittings included | Operating water pressure 0.7-7bar (10-100psi) | Water pressure - operated power switch | Water connection - 15mm plain shank tails push fit or standard compression fittings | Removable lower section for ease of installation.

kW variant	kW loading at 230-240V	Recommended cable sizes	Recommended fuse ratings
8.5	7.8 - 8.5	6 - 10mm <sup>2</sup>	40 amps
9.5	8.7 - 9.5	6 - 10mm <sup>2</sup>	45 amps

### Product Range

Product Reference	Short Code	Cat. No
<b>Advantage 550 8.5kW</b>	<b>ADV5508</b>	<b>53674202</b>
<b>Advantage 550 9.5kW</b>	<b>ADV5509</b>	<b>53676702</b>

\*The final year of the guarantee is only available for products registered with Redring after purchase.

8.5  
kW

9.5  
kW

2 yr  
GUARANTEE

BEAB  
Approved

CE