


## Premier DC2 and DC3 long life low energy centrifugal fans

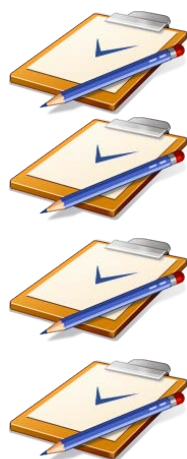

Meets New Building Regulations

Easy to install

Easy to maintain

Quiet



Premier DC3



Premier DC2

### Key Features

Extra long life, 'low energy use' Ultra DC motors

Suitable for surface or recessed mounting on wall or ceiling

DC2 model is supplied with an external transformer unit

Meets new building regulations for new builds and renovations.

17kg carbon saving per year

DC3 models have their own integral power supply

Clip off front cover and removable impeller for ease of cleaning and simple maintenance in situ.

IPX5 rated for wet zones 1 & 2

5 year UK guarantee


Maximum SFP 0.37

#### Product Selector


	Premier Ultra LVDX200T DC2 & DX200T DC3			Premier Ultra LVCF20T DC2 & CF20T DC3 (with humidistat control)		
Reference number	LVDX200T DC2 92439AW	DX200T DC3 92575AW		LVCF20T 92335AW	CF20T DC3 92576AW	
Humidistat		-		70-90% RH. Factory set at 70% RH		
Selectable installed performances installed with WD100+CFWG100 kit	6l/s	8l/s	15l/s	6l/s	8l/s	15l/s
Sound pressure level (dB(A)@3m)	-	-	32	-	-	32
Electrical power rating (W) 220-240V AC 50-60Hz	2.7	3.1	5.6	2.7	3.1	5.6
Specific fan power (maximum W/l/s)			0.37			0.37
IP rating			IPX5			IPX5
Weight (Kg)			1.8			1.8
Transformer on LV model	Located outside of spray area Zone 0,1,2			Located outside of spray area Zone 0,1,2		
Guarantee (years, UK)			5			5
Kg carbon saving (per year)			17*			17*

Contact our sales department on: 0844 372 7750

## Performance

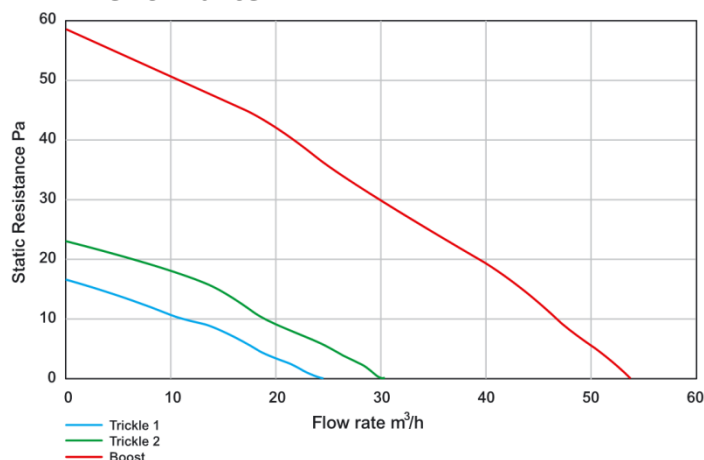

## Dimensions (mm)

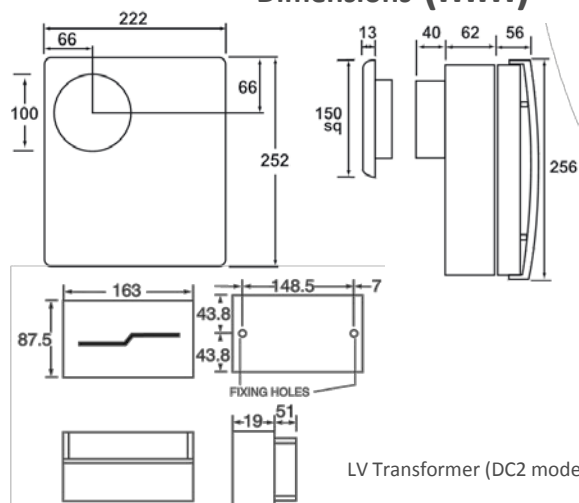


LV Transformer (DC2 models only)


Ventilation Type		Switch Number			Constant Trickle Speed	Light activated Switch Speed	Delay Timer	Over-run Timer	Pullcord Over-ride Switch Speed	*Humidity Over-ride
Intermittent	Constant	1	2	3						
WC		0	0	0	-	6 l/s	-	✓	15 l/s	15 l/s
Bathroom		0	1	0	-	15 l/s	-	✓	15 l/s	15 l/s
Bathroom		0	1	1	-	15 l/s	✓	✓	15 l/s	15 l/s
WC		0	0	1	-	6 l/s	✓	✓	15 l/s	15 l/s
	WC	1	0	0	6 l/s	-	-	-	15 l/s	15 l/s
	Bathroom	1	1	0	8 l/s	15 l/s	-	✓	15 l/s	15 l/s
	Bathroom	1	1	1	8 l/s	15 l/s	✓	✓	15 l/s	15 l/s
	WC	1	0	1	6 l/s	-	-	-	15 l/s	15 l/s

\*Humidity Over-ride only available on the LVCF20T DC2 version. Switch 1: Continuous trickle On/Off. Switch 2: Set trickle Speed. Switch 3: Delay timer On/Off. Switch 4: Not used  
Both models are suitable for a constant kitchen ventilation rate of 15 l/s. Note: The LVCF20 DC2 & CF20T DC3 Pull Cord Switch will always over-ride the humidity speed or the remote switch speed setting.


## Applications




Flush wall mounting



Ceiling mounting



Ducted applications



Ventilation shaft mounting

## Controllers



### Model

### COS

### XPIRA

2 Speed Switch

PIR Sensor

Reference number

90108AW

21871AA

LVDX200T DC2 & DX200T DC3

LVCF20T DC2 & CF20T DC3

\*Ducting and ancillaries are also available

Contact our sales department on: 0844 372 7750