

**18TH
EDITION
COMPLIANT**

FIRECLIP™



SUPERCLIP™



T&E CLIP™



CABLE TRAY CLIP™



NANO CLIP™



EARTH ROD PRO™



Save Time on Every Job.

Turning your toughest installs into your fastest

LINIAN 
FASTER. SAFER. SIMPLER.

LINIAN
FASTER. SAFER. SIMPLER.



**18TH
EDITION
COMPLIANT**

BS EN 50200

BS

120 Minutes
Fire Time

DIN 4102-12

DIN

90 Minutes
Fire Time

CE

Certified

**UK
CA**



REPLACE
CLEATS

CC3-CC6

For cables

4-14mm

24kg

Tensile Load



FIRECLIP™

For Fire and Security cables installations
including inside PVC trunking

FIRECLIP™

For Single or Double cable applications

70% quicker to install than traditional methods

18th Edition and Fire-Rated Cable Fixing, Safe and Compliant


90 & 120 minute fire resistant, meeting BSi and DIN classifications

Smoke emission tested to London Underground Standard

>1200 degrees Celsius melting point

Can be used with mini trunking alignment

Corrosion resistant and UV stable

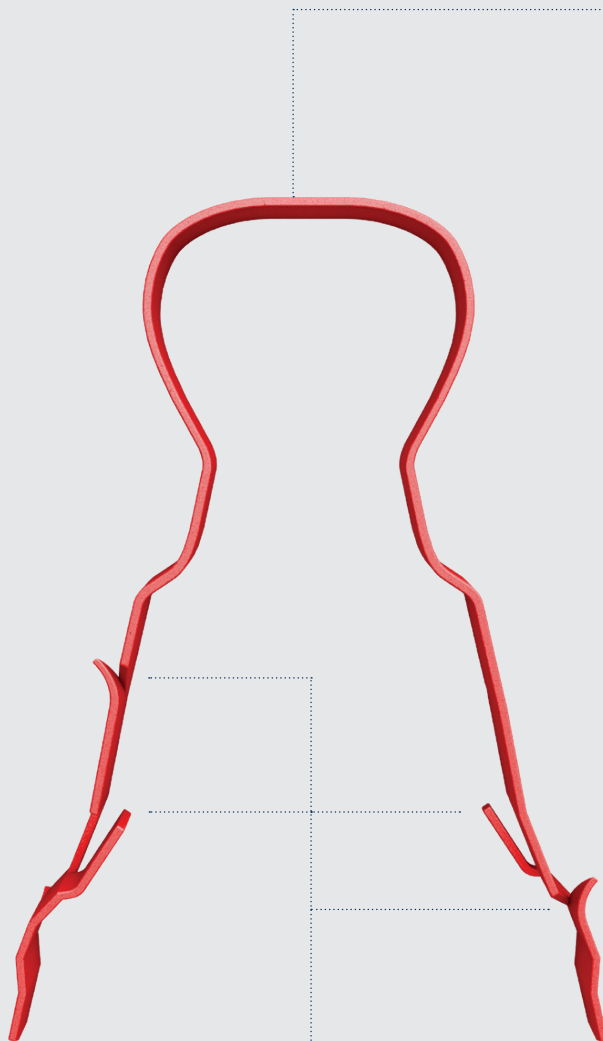

Salt spray tested to 1,000 hours. Our superior in-house coating not only looks good but performs when it matters most. Suitable for indoor and outdoor use.

Safe working load of 24kg. Our unique single component design has strength built in.




FAST AND EASY TO INSTALL

No need for plugs, screws and washers – just drill your hole, slide our clip over the cable, and push it into the wall.


*Softer substrates – Plaster, Plasterboard, etc.

*Harder substrates – Concrete, Masonry, Timber, etc.


Drill a hole in your substrate. We suggest a Ø5mm hole for softer substrates* and Ø6mm for harder substrates* to a depth of 30mm.

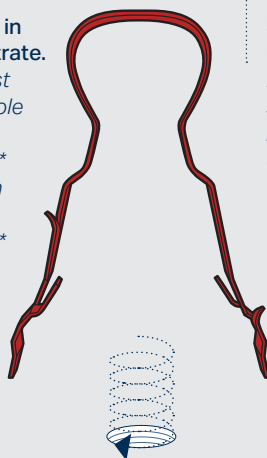

Slide the clip over the cable. Make sure it's seated in the rounded area of the clip.

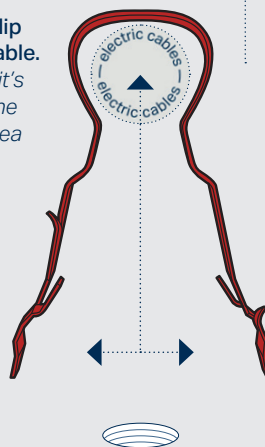

Compress and push it into the wall. Pinch the legs together and push into the hole by hand.

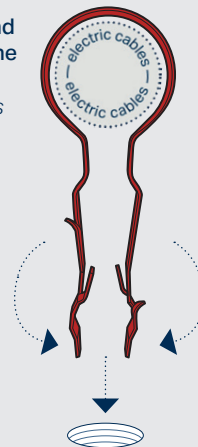

THE INDUSTRY STANDARD

Fast becoming the industry standard – FireClip™ meets all current industry regulations, and surpasses a few too.

British Standards:

- BS7671: Amendment 3
- BS7671: 18th Edition 2018
- BSEN50200 PH120
- BS8519: 2010

European Standards:

- DIN 4102-12 E90

4mm — 14mm

Soft skin, flex and round cables. Single and doubles.

Versatile

Can hold cable from Ø4mm up to Ø14mm. Available in a variety of colours including Red, Black or White.



LINIAN
FASTER. SAFER. SIMPLER.



**18TH
EDITION
COMPLIANT**

BS EN 50200

BS

120 Minutes
Fire Time

DIN 4102-12

DIN

90 Minutes
Fire Time

CE

Certified

**UK
CA**



**REPLACE
CLEATS**

CC6-CC10

**For cables
& conduits**

12-25mm

44kg

Tensile Load



SUPERCLIP™

Neat and fast EV, Solar, SWA and
conduit installations

SUPERCLIP™

Suitable for SWA Cable, Conduit and bunched cables for neat cable installation

Anchor fixings for wire and bunched cable

70% quicker to install than traditional methods


90 & 120 minute fire resistant, meeting BSi and DIN classifications

Corrosion resistant and UV stable, suitable for indoor and outdoor use

18th Edition and Fire-Rated Cable Fixings, Safe and Compliant

No need for conduit saddles

Perfect for **fast and neat** EV install and solar installs

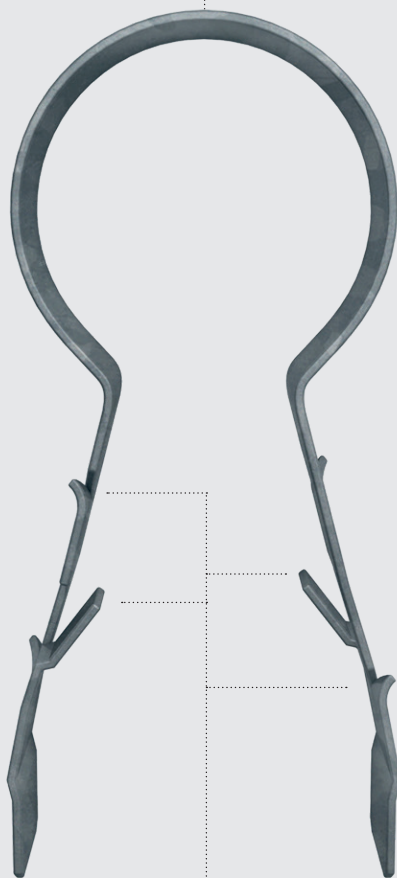

Suitable for armoured cable and trunking. Our SuperClip can accommodate cable, conduit and trunking widths of 12–25mm.


Safe Working Load of 44kg. Our unique single component design has strength built in.




FAST AND EASY TO INSTALL

No need for plugs, screws, washers conduit saddles or plastic/aluminium cleats – just drill your hole, slide our clip over the cable, and push it into the wall.


Drill a hole in your substrate. We suggest a Ø10mm hole at a depth of 40mm for all substrates.

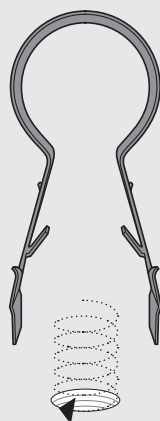

Slide the clip over the cable. Make sure it's seated in the rounded area of the clip.

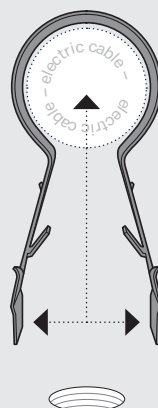

Compress and push it into the wall. Pinch the legs together and push into the hole by hand.

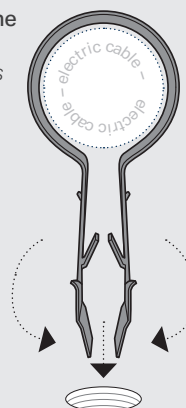

THE INDUSTRY STANDARD

Fast becoming the industry standard – SuperClip™ meets all current industry regulations, and surpasses a few too.

British Standards:
– BS7671: Amendment 3
– BS7671: 18th Edition 2018
– BSEN50200 PH120
– BS8519: 2010

European Standards:
– DIN 4102-12 E90

12mm — 25mm
SWA cables, PVC
metal conduct

Versatile
Can hold cable conduit and armoured (SWA) from Ø12mm up to Ø25mm. Available in a variety of colours including Red, Black, White or Galvanised.



LINIAN 
FASTER. SAFER. SIMPLER.

**18TH
EDITION
COMPLIANT**

BS EN 50200

BS
120 Minutes
Fire Time

DIN 4102-12

DIN
90 Minutes
Fire Time

CE
Certified

**UK
CA**



For cables

1-10mm

24kg

Tensile Load



T&E CLIP™

The most versatile way to install and secure
T&E cables

T&E CLIP™

Suitable for twin, cpc cabling and PVC trunking

Anchor fixings for wire and bunched cable

18th Edition and Fire-Rated Cable Fixings, Safe and Compliant


90 & 120 minute fire resistant, meeting BSi and DIN classifications

Corrosion resistant and UV stable, suitable for indoor and outdoor use



Suitable for twin and cpc cabling. our T&E Clip provides a robust fixing designed to support an impressive tensile load.

Safe working load of 24kg. Our unique single component design has strength built in.




FAST AND EASY TO INSTALL

No need for plugs, screws, washers or nail in clips – just drill your hole, slide our clip over the cable, and push it into the wall.


*Softer substrates – Plaster, Plasterboard, etc.

*Harder substrates – Concrete, Masonry, Timber, etc.


Drill a hole in your substrate. We suggest a Ø5mm hole for softer substrates* and Ø6mm for harder substrates* to a depth of 30mm.

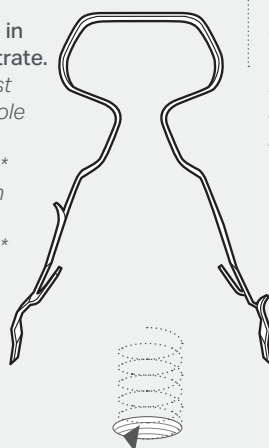

Slide the clip over the cable. Make sure it's seated in the rounded area of the clip.

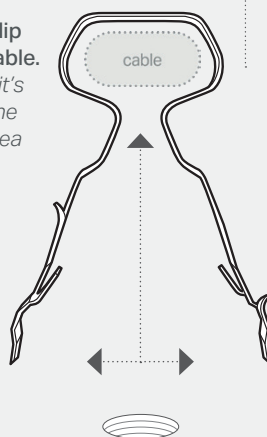

Compress and push it into the wall. Pinch the legs together and push into the hole by hand.

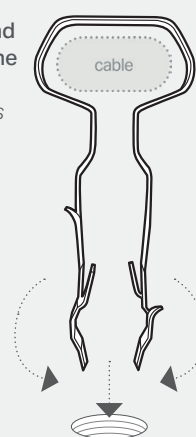

THE INDUSTRY STANDARD


Fast becoming the industry standard – T&E Clip™ meets all current industry regulations, and surpasses a few too.

British Standards:

- BS7671: Amendment 3
- BS7671: 18th Edition 2018
- BSEN50200 PH120
- BS8519: 2010

European Standards:

- DIN 4102-12 E90



Versatile

Can hold cable from Ø1mm upto Ø10mm. Available in grey or white.



LINIAN
FASTER. SAFER. SIMPLER.



**18TH
EDITION
COMPLIANT**

BS EN 50200

BS

120 Minutes
Fire Time

DIN 4102-12

DIN

90 Minutes
Fire Time

CE

Certified

**UK
CA**



*Replaces
stainless
steel cable
ties*

LIGHT

MEDIUM

HEAVY



CABLE TRAY CLIP™

Rapid installation securing any cable to any tray

CABLE TRAY CLIP™

Saves 90% time on installs
compared to using steel ties

No tensioning tools required -
simply locks
into place by hand

Use with any brand of cable tray

Fire rated lightweight steel
construction


Reusable sustainable design

Quick installation, reduces
labour and project costs
dramatically

Non corrosive and weather
resistant

Prevents Premature Collapse
of Cables and complies with
BS7671, 18th Edition


Fully recyclable packaging

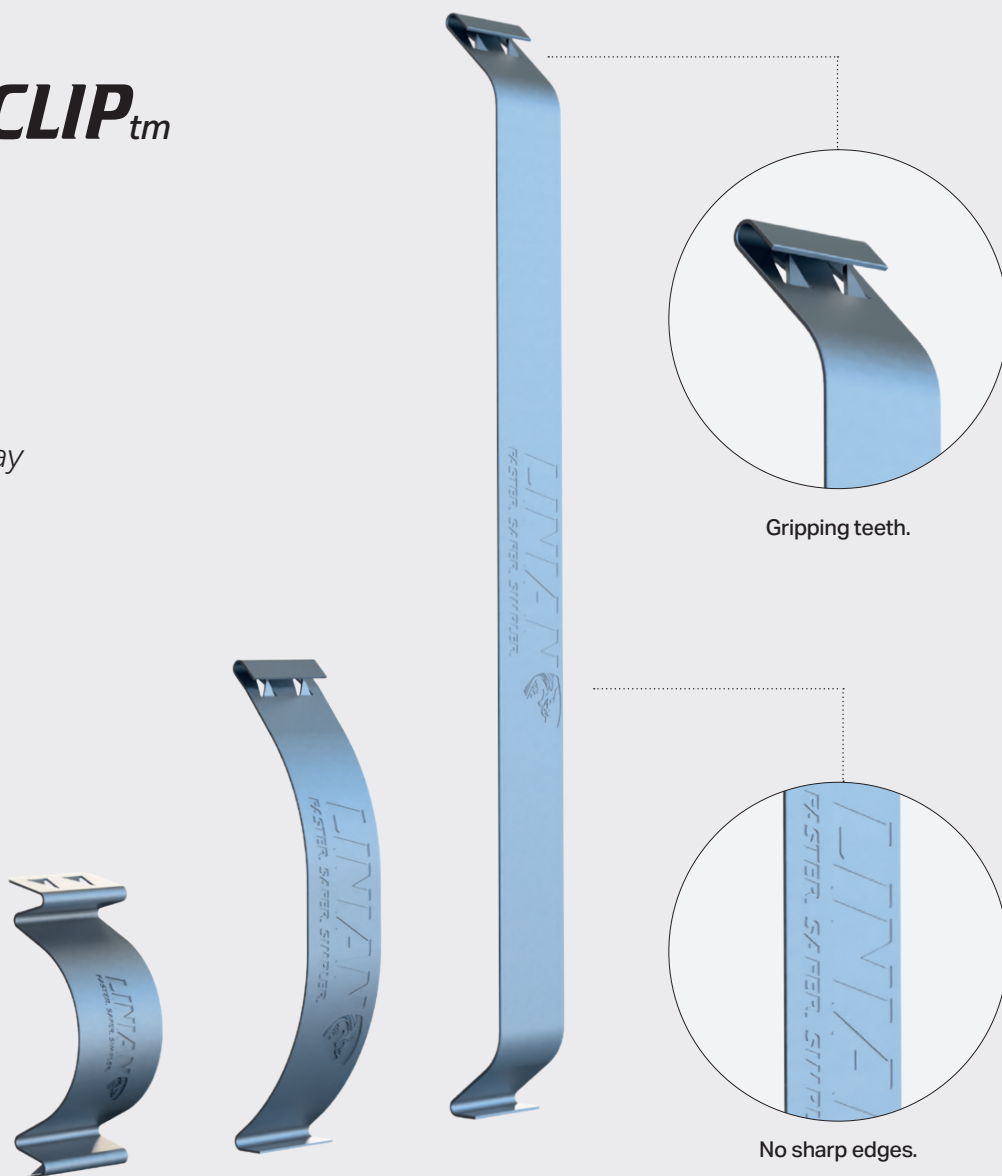

FAST AND EASY TO INSTALL

50mm Cable Tray Clip

Place the cable
tray clip over the
sides of the tray.



Lock in by hand
making sure that
gripping teeth are
now fixed on both
sides.



75mm - 225mm Cable Tray Clip

Attach the side of the
cable tray bracket with
the gripping teeth first by
hooking firmly under the
trays retur flange.



Attach the opposite side
under the opposite return
flange and lock in by hand.



Only 2-3 clips per length of cable tray required for installations to be in accordance with the parameters set by BEAMA Guide to Premature Collapse (2022)

THE INDUSTRY STANDARD


This product is produced in UK manufacturing facilities with an approved, certified Quality Management System compliant with ISO 901:2015.

British Standards:

– BS7671: Amendment 3
– BS7671: 18th Edition 2018
– BSEN50200 PH120 – BS8519: 2010

European Standards:

– DIN 4102-12 E



Steel specification:
Spring Steel



LINIAN 
FASTER. SAFER. SIMPLER.

**18TH
EDITION
COMPLIANT**

BS EN 50200

BS

120 Minutes
Fire Time

DIN 4102-12

DIN

90 Minutes
Fire Time

CE

Certified

**UK
CA**

For cables

0.9-3.8mm



NANO CLIP™

Fibre optic cables and other small diameter cables

NANO CLIP™


To fit: 2mm and 3mm

Salt-spray tested > 1000hrs
Corrosion resistant and UV
stable, suitable for indoor and
outdoor use

18th Edition and
Fire-Rated Cable Fixings,
Safe and Compliant


90 & 120 minute fire
resistant, meeting BSi
and DIN classifications

Melt point > 1200 °C
Tested to London
Underground Standard for
smoke emissions



Barely Visible
NanoClips™ provide a neat, tidy
and almost invisible finish.

Barbed Design
Grips the substrate for a secure
fixing. Made of spring steel.




FAST AND EASY TO INSTALL

**No need for plugs,
screws, washers or
nail in clips – just drill
your hole, slide our clip
over the cable, and
push it into the wall.**

*Softer substrates – Plaster,
Plasterboard, etc.

*Harder substrates – Concrete,
Masonry, Timber, etc.


**Drill a hole in
your substrate.**
We suggest a Ø3mm hole for
softer substrates* and Ø3.5mm –
Ø4.5mm for harder substrates*
to a depth of 13.5mm.



**Insert the cable into the open
side of the clip.**
Make sure it stays seated in the
side with the OPENING.



**Push it into the
wall.**
Pinch the legs
together and
push into the
hole by hand.



THE INDUSTRY STANDARD

**Fast becoming the
industry standard**
– Nano Clip™ meets
all current industry
regulations, and
surpasses a few too.

British Standards:
– BS7671: Amendment 3
– BS7671: 18th Edition 2018
– BSEN50200 PH120
– BS8519: 2010

European Standards:
– DIN 4102-12 E90

2mm — 3mm
Fibre cables and other
small diameter cables.

Versatile
Can hold cable from Ø2mm upto
Ø3mm. Available in white, black and
brown.



EXTERNAL NANO CLIP™

To fit: 3mm to 6mm cables

Salt-spray tested > 1000hrs
Corrosion resistant and UV
 stable, designed for outdoor
 use

18th Edition and
Fire-Rated Cable Fixings,
Safe and Compliant

90 & 120 minute fire
resistant, meeting BSi
 and DIN classifications

Melt point > 1200 °C
 Tested to London
 Underground Standard for
 smoke emissions



External NanoClips™ provide a
 neat, tidy and almost invisible finish.



Barbed Design penetrates the
 render and grips the substrate.

Material
 Spring Steel

FAST AND EASY TO INSTALL


**No need for plugs,
 screws, washers or
 nail in clips – just drill
 your hole, slide our clip
 over the cable, and
 push it into the wall.**

**Drill a hole in
 your substrate.**
 We suggest a Ø7mm
 hole at a depth of
 52mm.

**Insert the cable into
 the open side of
 the clip.**
 Make sure it stays
 seated in the side
 with the OPENING.

Push it into the wall.
 Insert with the
 CLOSED area of
 the clip facing into
 the wall.

**Use the LINIAN CLIP
 Insertion Tool**
 Push the clip in easily
 using this versatile
 insertion tool.

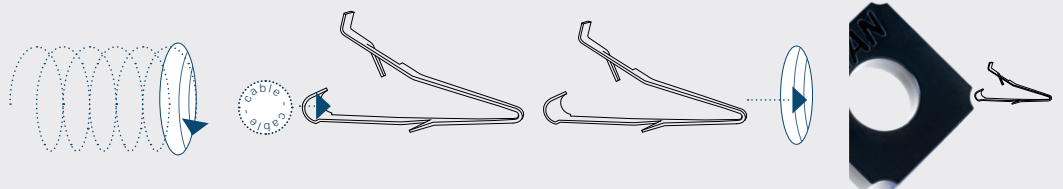


THE INDUSTRY STANDARD

**This product is produced in
 UK manufacturing facilities**
 with an approved, certified
 Quality Management
 System compliant with ISO
 901:2015.

British Standards:
 – BS7671: Amendment 3
 – BS7671: 18th Edition 2018
 – BSEN50200 PH120
 – BS8519: 2010

European Standards:
 – DIN 4102-12 E90



Versatile
 Can hold cable from Ø3mm up to
 Ø6mm. Available in white and black.

LINIAN
FASTER. SAFER. SIMPLER.



**18TH
EDITION
COMPLIANT**

BS EN 50200

BS

120 Minutes
Fire Time

DIN 4102-12


DIN

90 Minutes
Fire Time

CE

Certified

**UK
CA**

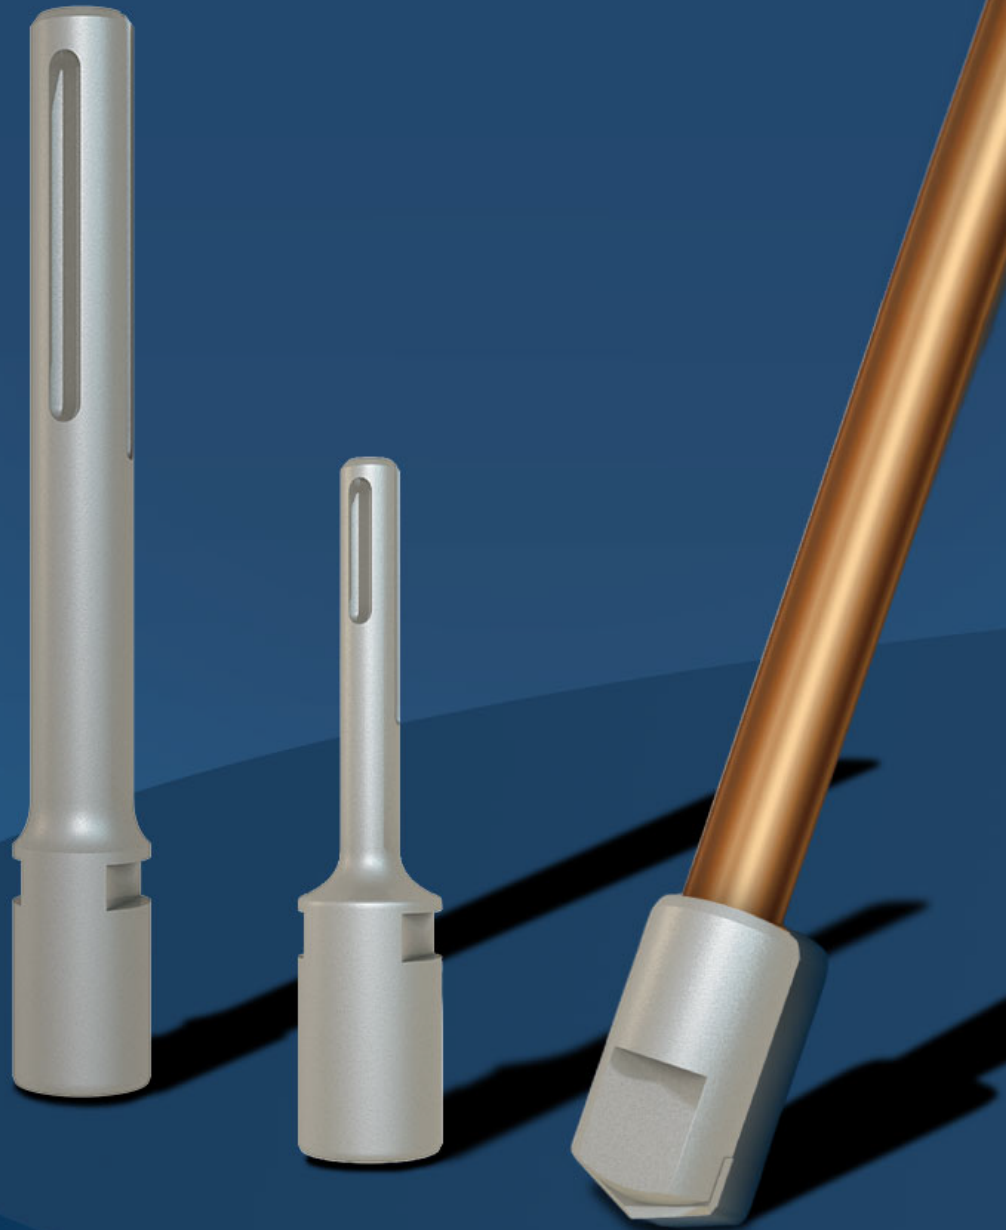

EARTH ROD PRO™

For rapid Earth Rod nstallation

EARTH ROD PRO RANGEtm

Threads onto any standard earth rod

Bores through hard top layers and underground rock

EARTH ROD MAX DRIVER

Attaches to your SDS drill

EARTH ROD PRO DRIVER

Attaches to your SDS drill


EARTH ROD DRILL BIT

Attaches directly to the earth rod




FAST AND EASY TO INSTALL

Remove the ERP Driver, ERP tip and the nut provided from their packaging.




Turn the nut and then the Driver on to one end of the earth rod and the tip onto the opposite end. Insert the Driver into the SDS or SDS Max chuck.

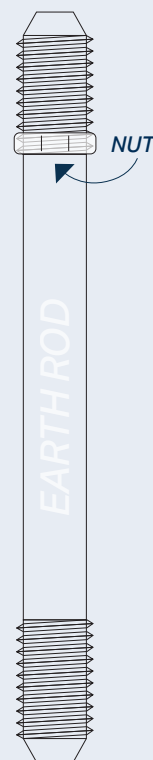

You can apply some grease to the shafts for easier removal.

Using the SDS drill, drive the rod into the substrate to the required depth.

Make sure that the shat and nut are removed and reused on your next earth rod install.



SPECIFICATIONS

Quality Standard:

All parts are produced in UK manufacturing facilities with an approved, certified Quality Management System compliant with ISO 901:2015.

Threads:

All parts made concurrently on state of the art sliding head lathes to ensure perfect compatibility of 5/8" BSW threads with copper earth rods.

Heat treatment:

Through-hardened to 45-55 HRC Rockwell, Strikes the perfect balance of toughness in hammer drilling applications.

Brazing:

Copper-brazing carbide tips at 1100 degrees Celsius to ensure an ultra-strong bond between tip and steel for extreme durability in the toughest drilling applications.

Carbide Tip Specification: European sourced 'Hammer-grade' Tungsten carbide tip designed to withstand hammer blows into the hardest of masonry substrates.

Earth Rod Drill Bit

Standard Tip also available (without Carbide) for fast, economical installation into softer substrates.

Drive Shanks:

Both our drive shanks are made to Bosch license specifications.

Steel Specification:

High alloy content, chromium, nickel, molybdenum European steel.