





# Excel Life™ Wiring Accessories and Soliroc™


Excel Life™




P. 202  
Excel Life™  
switches




P. 209  
Excel Life™  
dimmers




P. 211  
Excel Life™  
time delay




P. 212  
Excel Life™  
powerpoints




P. 214  
Excel Life™  
LED illumination  
kits




P. 216  
Excel Life™  
data and  
voice sockets




P. 217  
Excel Life™  
sensor lights



P. 217  
Excel Life™  
signalling




P. 218  
Excel Life™  
hotel



P. 218  
Excel Life™  
grid and plates



P. 220  
Excel Life™  
coverplates




P. 221  
Excel Life™  
accessories


Soliroc™



NEW  
P. 224  
Soliroc™ lighting  
control units




NEW  
P. 235  
Soliroc™  
socket outlets



NEW  
P. 225  
Soliroc™  
accessories

Batibox™



NEW  
P. 226  
Batibox™  
flush-mounting  
boxes for dry  
partitions



Quick reference guides for  
wiring devices and automation  
p. 166 to 173


Excel Life™  
Light switches - dedicated plate series



| Pack | Cat No.      |              | Dedicated plate switches                                                          |                                                                                   |
|------|--------------|--------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
|      |              |              |  |  |
| 10   | ED770/1WE    | ED770/1UG    | <b>Standard rocker switch mechanisms are 16AX fluoro rated</b>                    |                                                                                   |
|      |              |              |                                                                                   |                                                                                   |
| 10   | ED770/2WE    | ED770/2UG    |                                                                                   |                                                                                   |
|      |              |              |                                                                                   |                                                                                   |
| 10   | ED770/3WE    | ED770/3UG    |                                                                                   |                                                                                   |
|      |              |              |                                                                                   |                                                                                   |
| 10   | ED770/4WE    | ED770/4UG    |                                                                                   |                                                                                   |
|      |              |              |                                                                                   |                                                                                   |
| 10   | ED770/5WE    | ED770/5UG    |                                                                                   |                                                                                   |
|      |              |              |                                                                                   |                                                                                   |
| 10   | ED770/6WE    | ED770/6UG    |                                                                                   |                                                                                   |
|      |              |              |                                                                                   |                                                                                   |
| 10   | ED770/40DPWE | ED770/40DPUG |                                                                                   |                                                                                   |
|      |              |              |                                                                                   |                                                                                   |
| 10   | ED770/40WE   | ED770/40UG   |                                                                                   |                                                                                   |
|      |              |              |                                                                                   |                                                                                   |

|    |              |              |                                   |  |
|----|--------------|--------------|-----------------------------------|--|
| 10 | ED770/11PWE  | ED770/11UG   | <b>Weatherproof IP66 switches</b> |  |
|    |              |              |                                   |  |
| 10 | ED770/21PWE  | ED770/21UG   |                                   |  |
|    |              |              |                                   |  |
| 10 | ED770/1HIPWE | ED770/1HIPUG |                                   |  |
|    |              |              |                                   |  |
| 10 | ED770/2HIPWE | ED770/2HIPUG |                                   |  |
|    |              |              |                                   |  |

Excel Life™  
Light switches - common plate series



| Pack | Cat No.      | Common plate switches                                                             |  |
|------|--------------|-----------------------------------------------------------------------------------|--|
|      |              |  |  |
| 10   | EC770/1WE    | <b>Standard rocker switch mechanisms are 16AX fluoro rated</b>                    |  |
|      |              |                                                                                   |  |
| 10   | EC770/2WE    |                                                                                   |  |
|      |              |                                                                                   |  |
| 10   | EC770/3WE    |                                                                                   |  |
|      |              |                                                                                   |  |
| 10   | EC770/4WE    |                                                                                   |  |
|      |              |                                                                                   |  |
| 10   | EC770/5WE    |                                                                                   |  |
|      |              |                                                                                   |  |
| 10   | EC770/6WE    |                                                                                   |  |
|      |              |                                                                                   |  |
| 10   | EC770/40DPWE |                                                                                   |  |
|      |              |                                                                                   |  |
| 10   | EC770/40WE   |                                                                                   |  |
|      |              |                                                                                   |  |
| 6    | EC914WE      |                                                                                   |  |
|      |              |                                                                                   |  |

Excel Life™  
Weatherproof switches  
Shutter, blind, curtain switches



| Pack | Cat No.      | Weatherproof IP66 switches                                                          |  |
|------|--------------|-------------------------------------------------------------------------------------|--|
|      |              |  |  |
| 10   | EC770/1IPWE  | <b>Weatherproof IP66 switches</b>                                                   |  |
|      |              |                                                                                     |  |
| 10   | EC770/2IPWE  |                                                                                     |  |
|      |              |                                                                                     |  |
| 10   | EC770/1HIPWE |                                                                                     |  |
|      |              |                                                                                     |  |
| 10   | EC770/2HIPWE |                                                                                     |  |
|      |              |                                                                                     |  |
|      |              | <b>Shutter, blind, curtain control</b>                                              |  |
| 10   | EC919WE      |                                                                                     |  |
|      |              |                                                                                     |  |
| 10   | EC920WE      |                                                                                     |  |
|      |              |                                                                                     |  |

Excel Life™  
Electronic and mechanical mechanisms



| Pack | Cat No.                                                                             |                                                                                     | Electronic push button mechanisms                                                     |                                                                      |
|------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------------------------------------|
|      |  |  | See p34. for wiring diagrams                                                          |                                                                      |
| 10   | White<br>EM883WE                                                                    | Urban Grey<br>EM883UG                                                               |    | Electronic push button<br>5A, 230 - 240V a.c.<br>Fluoro rated 500VA. |
| 10   | EM800-<br>SLAVEWE                                                                   | EM800-<br>SLAVEUG                                                                   |    | Secondary control push<br>button 230 - 240V a.c.                     |
|      |                                                                                     |                                                                                     |                                                                                       |                                                                      |
| 10   | EM803PEWE                                                                           | EM803PEUG                                                                           |    | Electronic control mechanisms <b>COMING SOON</b>                     |
| 10   | EMIRWE                                                                              | EMIRUG                                                                              |   |                                                                      |
| 10   | EAIRREMOTE                                                                          |                                                                                     |  |                                                                      |
|      |                                                                                     |                                                                                     |                                                                                       |                                                                      |
| 10   | EM770WE                                                                             | EM770UG                                                                             |  | Mechanical mechanisms<br>See p33. for wiring diagrams                |
| 10   | EM770-<br>AIRCONWE                                                                  | EM770-<br>AIRCONUG                                                                  |  |                                                                      |
| 10   | EM770-<br>EXHWE                                                                     | EM770-<br>EXHUG                                                                     |  |                                                                      |
| 10   | EM770-<br>FANWE                                                                     | EM770-<br>FANUG                                                                     |  |                                                                      |
| 10   | EM770-<br>HEATWE                                                                    | EM770-<br>HEATUG                                                                    |  |                                                                      |
| 10   | EM770-<br>LIGHTWE                                                                   | EM770-<br>LIGHTUG                                                                   |  |                                                                      |



Excel Life™  
Mechanical mechanisms



| Pack | Cat. No.                    |                                  | Mechanical mechanisms                                                                  |
|------|-----------------------------|----------------------------------|----------------------------------------------------------------------------------------|
| 10   | White<br>EM770-<br>SENSORWE | Urban Grey<br>EM770-<br>SENSORUG | Single pole double<br>Throw 16A fluoro rated<br>16AX, 230 - 240v a.c.<br>Marked sensor |
| 10   | EM770-<br>WASTEWE           | EM770-<br>WASTEUG                | Marked waste                                                                           |
| 10   | EM770-<br>BPASSWE           | EM770-<br>BPASSUG                | Marked bypass                                                                          |
| 10   | EM770-<br>ZONE1WE           | EM770-<br>ZONE1UG                | Marked zone 1                                                                          |
| 10   | EM770-<br>ZONE2WE           | EM770-<br>ZONE2UG                | Marked zone 2                                                                          |
| 10   | EM770-<br>ZONE3WE           | EM770-<br>ZONE3UG                | Marked zone 3                                                                          |
| 10   | EM770-<br>ZONE4WE           | EM770-<br>ZONE4UG                | Marked zone 4                                                                          |
| 10   | EM770IMWE                   | EM770IMUG                        | Intermediate<br>16A 230 - 240V a.c.                                                    |
| 10   | EM770DPWE                   | EM770DPUG                        | Double pole double<br>throw 16A fluoro rated<br>10AX, 230 - 240V a.c.                  |
| 10   | EM770/20DPWE                | EM770/20DPUG                     | Double pole double<br>throw 20A fluoro rated<br>10AX, 230 - 240V a.c.                  |
| 10   | EM770/20WE                  | EM770/20UG                       | Single pole single<br>throw 20A fluoro rated<br>20AX, 230 - 240V a.c.                  |

Excel Life™  
Mechanical mechanisms



| Pack | Cat. No.              |                            | Mechanical mechanisms                                                                      |
|------|-----------------------|----------------------------|--------------------------------------------------------------------------------------------|
| 10   | White<br>EM770/20RDWE | Urban Grey<br>EM770/20RDUG | Single pole double<br>throw with red indicator<br>20A fluoro rated 20AX<br>230 - 240V a.c. |
| 10   | EM770/20ACWE          | EM770/20ACUG               | Single pole double throw<br>20A fluoro rated<br>20AX, 230 - 240v a.c.<br>Marked air con    |
| 10   | EM770/25WE            | EM770/25UG                 | Single pole single<br>throw 25A fluoro rated<br>20AX, 230 - 240V a.c.                      |
| 10   | EM770/32WE            | EM770/32UG                 | Single pole single<br>throw 32A, fluoro rated<br>20AX, 230 - 240V a.c.                     |
| 10   | EM770/32HOTPWE        | EM770/32HOTPUG             | Single pole single throw<br>32A fluoro rated<br>20AX, 230 - 240V a.c.<br>Marked hot plate  |
| 10   | EM770/32OVENWE        | EM770/32OVENUG             | Single pole single throw<br>32A fluoro rated<br>20AX 230 - 240v a.c.<br>Marked oven        |
| 10   | EM770DUOWE            | EM770DUOUG                 | 2 x single pole<br>single throw 16A<br>fluoro rated 10AX<br>230 - 240V a.c.                |
| 10   | EM770-<br>DUOHTWE     | EM770-<br>DUOHTUG          | 2 x single pole single throw<br>16A fluoro rated<br>10AX, 230 - 240v a.c.<br>Marked heat   |
| 10   | EM770XWE              | EM770XUG                   | Single pole single throw<br>spring return 16A<br>230 - 240v a.c.                           |
| 10   | EM770X-<br>DOORWE     | EM770X-<br>DOORUG          | Single pole single throw<br>spring return 16A<br>230 - 240v a.c.<br>Marked door            |



Excel Life™  
Mechanical mechanisms  
Keylock mechanisms



| Pack | Cat. No.                    |                                  | Mechanical mechanisms                                                                                                                                                    |
|------|-----------------------------|----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10   | White<br>EM770X-<br>PRESSWE | Urban Grey<br>EM770X-<br>PRESSUG | Single pole single throw<br>spring return 16A<br>230 - 240v a.c.<br>Marked press                                                                                         |
|      | EM770X-<br>RESETWE          | EM770X-<br>RESETUG               | Single pole single throw<br>spring return 16A<br>230 - 240v a.c.<br>Marked reset                                                                                         |
| 10   | EMRSWE                      | EMRSUG                           | Rotary switch mechanism<br>- (all-in-one solution),<br>comes with 6 marking<br>plate options and 180°,<br>270° and 360° rings.<br>16A fluoro rated 16AX<br>230-240V a.c. |
| 10   | EM820-<br>KLIOWE            | EM820-<br>KLIUG                  | <b>Keylock mechanisms</b><br>Switch mechanism<br>1 gang keylock switch<br>removable OFF or ON<br>position 20A fluoro rated<br>20AX, 230 - 240V a.c.                      |
| 10   | EM820KLIWE                  | EM820KLIUG                       | Switch mechanism<br>1 gang keylock switch<br>removable ON only<br>20A fluoro rated 20AX,<br>230 - 240V a.c.                                                              |
| 10   | EM820KLOWE                  | EM820KLOUG                       | Switch mechanism<br>1 gang keylock switch<br>removable OFF only<br>20A fluoro rated 20AX,<br>230-240V a.c.                                                               |
| 10   | EM770/20KT                  |                                  | <b>Mechanical keytag switch</b><br>Single pole, single throw<br>20A fluoro rated 20AX<br>230-240V a.c.                                                                   |



Excel Life™  
Plate installation dimensions

Dedicated plate series  
installation dimensions




Glass and tile  
cut-out size

Common plate series  
installation dimensions




Glass and tile  
cut-out size

## Mechanical switch mechanism wiring diagrams

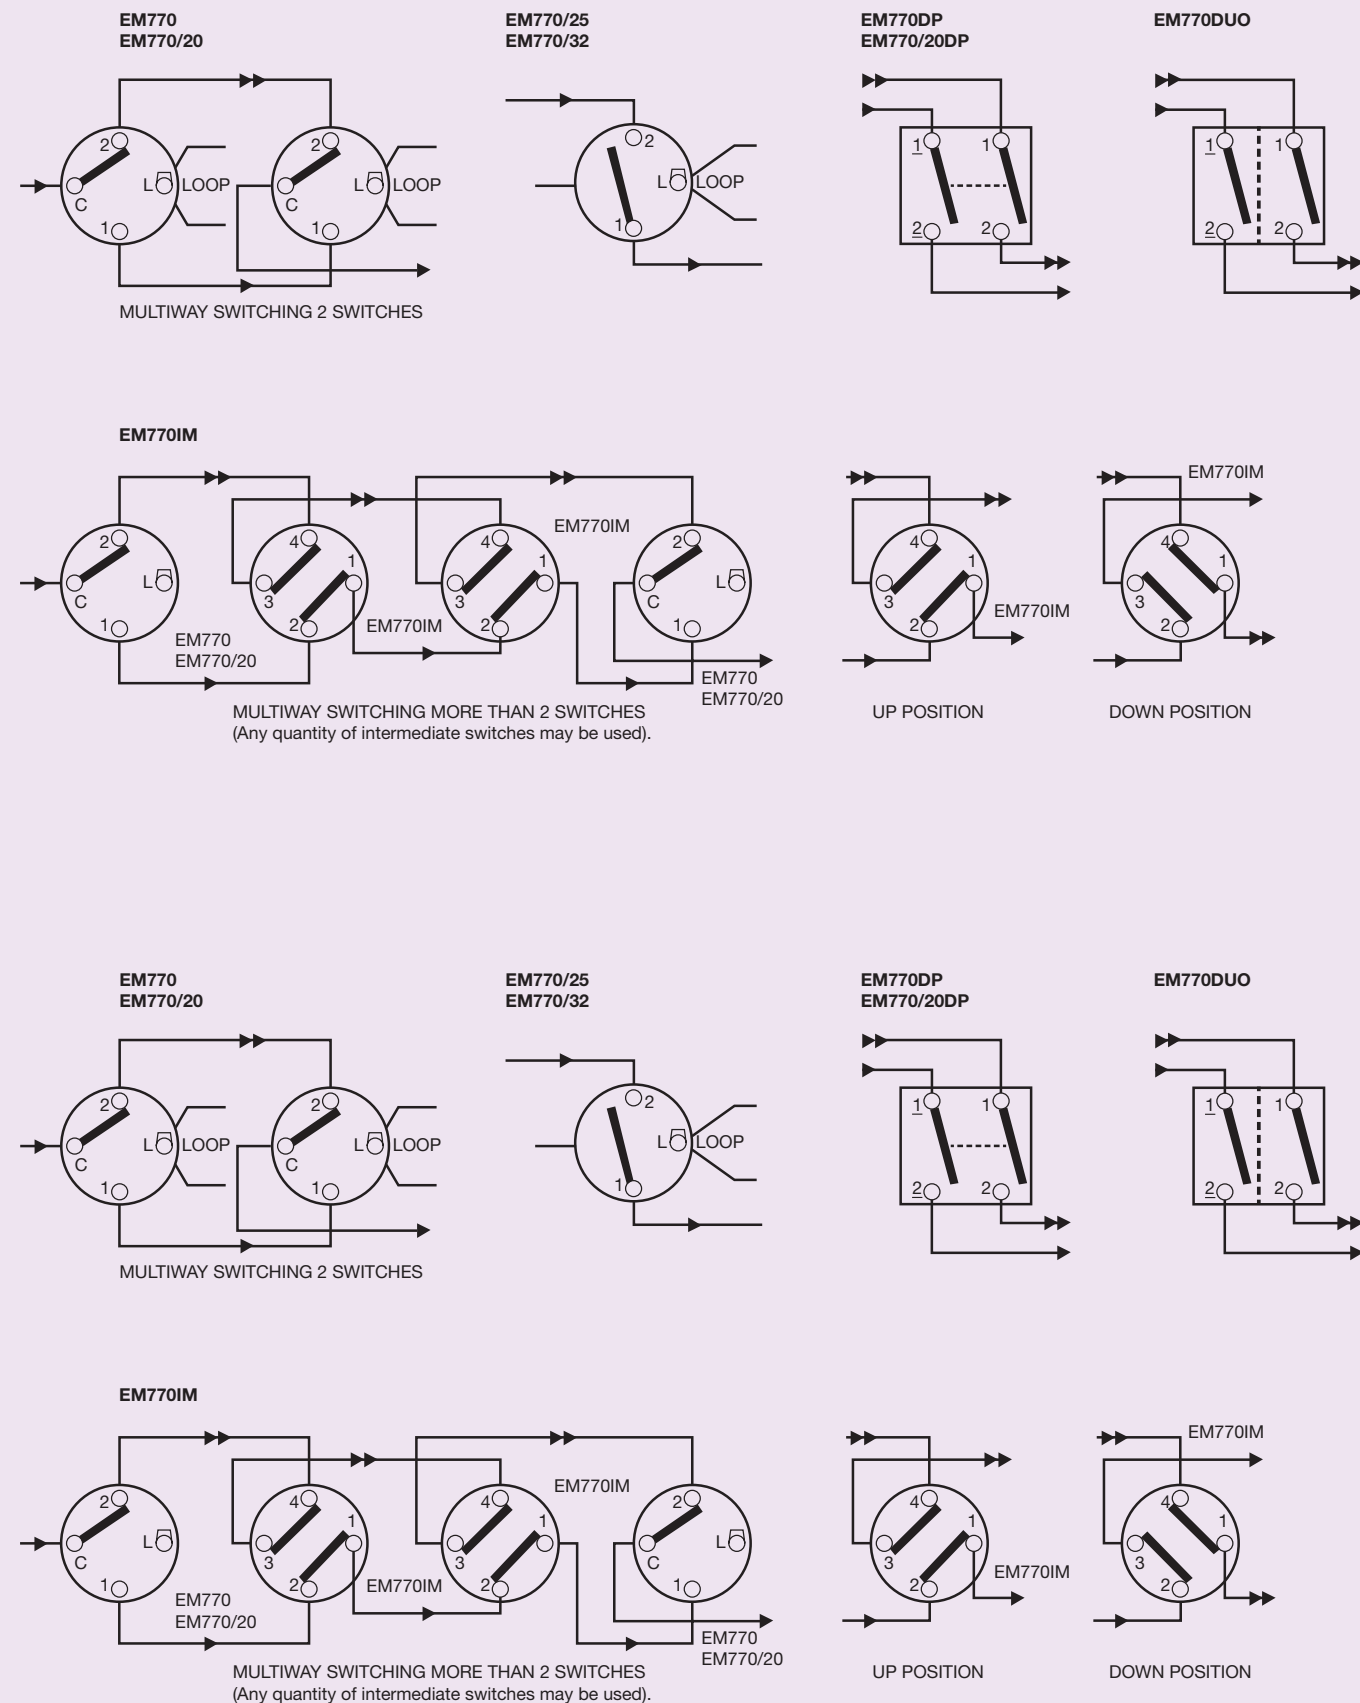


**Excel Life™**  
Switch mechanisms

### Electronic push button switch wiring diagram EM883WE

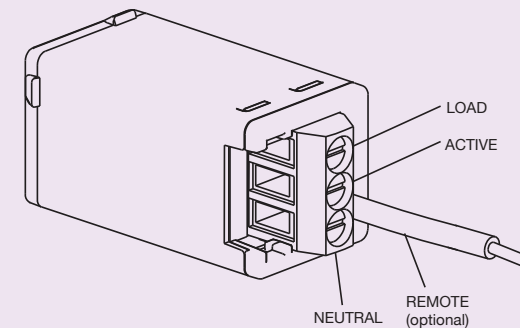

- Connect optional Secondary Control Buttons (EM800SLAVE) to enable switching from multiple locations.

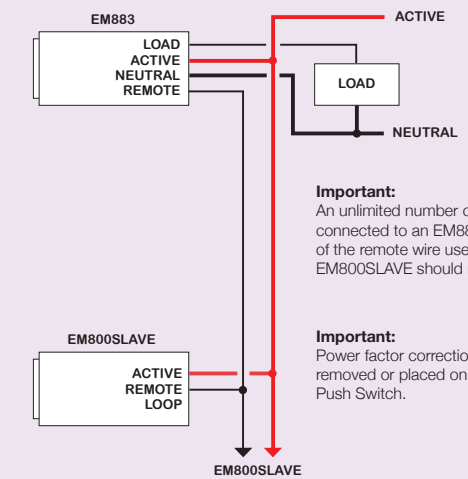

**Important:**  
An unlimited number of EM800SLAVE can be connected to an EM883. However, the total length of the remote wire used to interconnect all of the EM800SLAVE should not exceed 50 metres.

**Important:**  
Power factor correction capacitors must be either removed or placed on the line side of the Electronic Push Switch.

### Technical characteristics

|                                                                                                                                       |                                                                                                                   |                                                                                                     |                                                                                                |                                                                                                         |                                                                                                               |                                                                                                                |                                                                                                            |                                                                                                                                                                                 |                                                                                                  |
|---------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
| <br>+ 50°C<br>+ 0°C<br><br>230 - 240V a.c.<br>50Hz | <br>1 x 2,5 mm²<br>2 x 1,5 mm² | Incandescent<br> | Halogen<br> | Fluorescent tube<br> | Wirewound transformer<br> | Electronic transformer<br> | Compact fluorescent<br> | LED<br>  | Fan motor<br> |
| Max load                                                                                                                              |                                                                                                                   | 1200W                                                                                               | 1200W                                                                                          | 500VA                                                                                                   | 500VA                                                                                                         | 500VA                                                                                                          | 500VA                                                                                                      | 500VA                                                                                                                                                                           | 500VA                                                                                            |

Minimum load = 10VA for all load types

### LED Indicator

■ The colour of the LED indicator can be either red or blue. In addition, when the switch is off the LED indicator can either glow faintly or be off completely. The four possible modes are as follows:


- To change between modes, press and hold the push button for at least 10 seconds. This will select the next mode in the sequence above.




| Mode | Status of LED indicator |            |
|------|-------------------------|------------|
|      | Switch on               | Switch off |
| 1    | Bright red              | Faint red  |
| 2    | Bright blue             | Faint blue |
| 3    | Bright red              | Off        |
| 4    | Bright blue             | Off        |

Excel Life™  
Rotary switch - EMRSWE


Installation

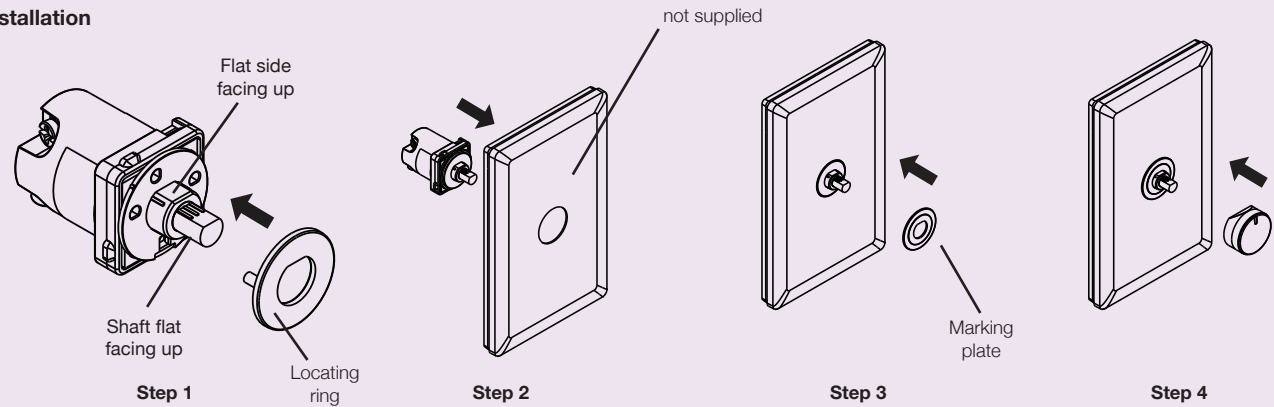


Rotation ring options

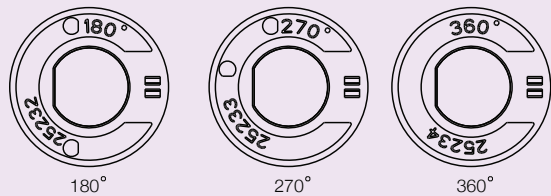

Wiring for 360° rotation

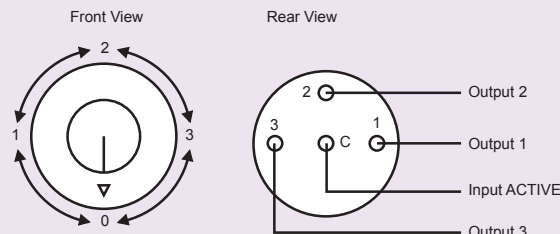


Marking plate options



Select one of the following wiring options:

| POSITION |    |     |    | WIRING                    |
|----------|----|-----|----|---------------------------|
| 0        | 1  | 2   | 3  |                           |
| OFF      | ON | ON  | ON | Connect All Terminals     |
| OFF      | ON | OFF | ON | Do Not Connect Terminal 2 |


Wiring for 270° rotation

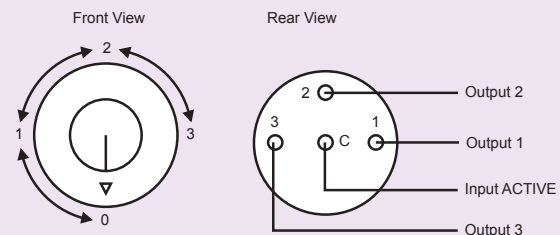

Select one of the following wiring options:

| POSITION |    |    |    | WIRING                |
|----------|----|----|----|-----------------------|
| 0        | 1  | 2  | 3  |                       |
| OFF      | ON | ON | ON | Connect All Terminals |

Wiring for 180° rotation

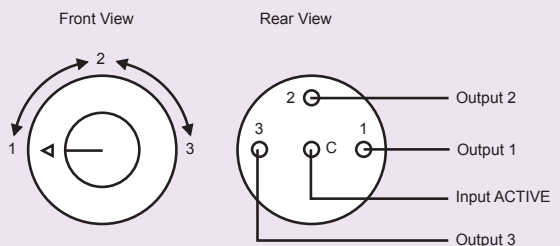

Select one of the following wiring options:

| POSITION |     |     | WIRING                    |
|----------|-----|-----|---------------------------|
| 1        | 2   | 3   |                           |
| ON       | ON  | ON  | Connect All Terminals     |
| ON       | OFF | ON  | Do Not Connect Terminal 2 |
| OFF      | ON  | ON  | Do Not Connect Terminal 1 |
| ON       | ON  | OFF | Do Not Connect Terminal 3 |

Excel Life™  
Dimmers



| Pack | Cat No.            |                         |
|------|--------------------|-------------------------|
| 10   | White<br>EM450UPWE | Urban Grey<br>EM450UPUG |
| 10   | EM450A3PWE         | EM450A3PUG              |
| 10   | EM250TRWE          | EM250TRUG               |
| 10   | EM400TRWE          | EM400TRUG               |
| 10   | EM700TRWE          | EM700TRUG               |

Dimmers

Electronic push button can be used with EM800SLA-VEWE for multi-way dimming. Onboard programming allows the LED to be blue or red.

Electronic push button 450VA universal load 230 - 240V a.c.

Electronic push button 450VA all-load (neutral required) 230-240V a.c.

Rotary

New easy grip lower profile knob. Automatically dims if dimmer is overloaded or insufficiently derated

250VA Trailing edge 230 - 240V a.c.

400VA Trailing edge 230 - 240V a.c.

700VA Trailing edge 230 - 240V a.c.

10 EM2000ERC 2000va leading-edge remote dimmer

Electronic push button dimmer  
EM450UP

Technical characteristics


|          |                             | Incandescent | Halogen | Fluorescent tube | Wirewound transformer | Electronic transformer | Compact fluorescent | LED | Fan motor |
|----------|-----------------------------|--------------|---------|------------------|-----------------------|------------------------|---------------------|-----|-----------|
|          |                             |              |         |                  |                       |                        |                     |     |           |
| Max load | 1 dimmer per plate          | 450W         | 450W    | X                | 270VA                 | 450VA                  | X                   | X   | X         |
|          | 2 dimmers per plate         | 400W         | 400W    | X                | 240VA                 | 400VA                  | X                   | X   | X         |
|          | 3 or more dimmers per plate | 350W         | 350W    | X                | 210VA                 | 350VA                  | X                   | X   | X         |

Minimum load = 10VA for all load types

Excel Life™  
Electronic push button dimmer - EM450UP


Wiring

Connect optional Secondary Control Buttons (EM800SLAVE) to enable dimming from multiple locations.

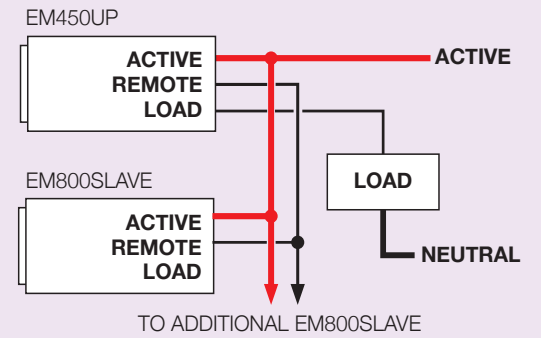

Important:

An unlimited number of EM800SLAVE can be connected to an EM450UP. However, the total length of the remote wire used to interconnect all of the EM800SLAVE should not exceed 50 metres.


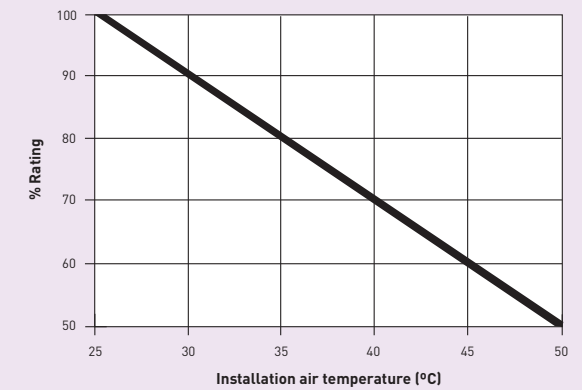


Important:

When used in ambient temperatures greater than 25°C, the dimmer must be de-rated according to the following chart.

Excel Life™  
Electronic push button dimmers EM450A3P  
Rotary dimmers - EM250TR/EM400TR/EM700TR

Electronic push button dimmer EM450A3P  
Technical characteristics

|          |                             | <br>+ 50°C<br><br>+ 0°C<br><br>230 - 240V a.c.<br>50-Hz | <br><br>1 x 2.5 mm <sup>2</sup><br><br>2 x 1.5 mm <sup>2</sup> | Incandescent<br> | Halogen<br> | Fluorescent tube<br> | Wirewound transformer<br> | Electronic transformer<br> | Compact fluorescent<br> | LED<br><br> | Fan motor<br> |
|----------|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
| Max load | 1 dimmer per plate          | 450W                                                                                                                                     | 450W                                                                                                                                            | X                                                                                                 | 270VA                                                                                        | 450VA                                                                                                 | 450VA                                                                                                      | 450VA                                                                                                       | X                                                                                                          |                                                                                                                                                                                   |                                                                                                  |
|          | 2 dimmers per plate         | 400W                                                                                                                                     | 400W                                                                                                                                            | X                                                                                                 | 240VA                                                                                        | 400VA                                                                                                 | 400VA                                                                                                      | 400VA                                                                                                       | X                                                                                                          |                                                                                                                                                                                   |                                                                                                  |
|          | 3 or more dimmers per plate | 350W                                                                                                                                     | 350W                                                                                                                                            | X                                                                                                 | 210VA                                                                                        | 350VA                                                                                                 | 350VA                                                                                                      | 350VA                                                                                                       | X                                                                                                          |                                                                                                                                                                                   |                                                                                                  |

Minimum load = 3VA for all load types

Rotary dimmers - EM250TR/EM400TR/EM700TR  
Technical characteristics


|                  |                     |      |      |   |   |       |                |   |   |
|------------------|---------------------|------|------|---|---|-------|----------------|---|---|
| Max load EM250TR | 1 dimmer per plate  | 250W | 250W | X | X | 250VA | 250VA see note | X | X |
|                  | 2 dimmers per plate | 225W | 225W | X | X | 225VA | 225VA see note | X | X |
|                  | 3 dimmers per plate | 200W | 200W | X | X | 200VA | 200VA see note | X | X |
| Max load EM400TR | 1 dimmer per plate  | 400W | 400W | X | X | 400VA | 400VA see note | X | X |
|                  | 2 dimmers per plate | 350W | 350W | X | X | 350VA | 350VA see note | X | X |
|                  | 3 dimmers per plate | 300W | 300W | X | X | 300VA | 300VA see note | X | X |
| Max load EM700TR | 1 dimmer per plate  | 700W | 700W | X | X | 700VA | 700VA see note | X | X |

Minimum load = 10VA for all load types



**Note:** Compact Fluorescent Lamps (CFLs), also known as Energy Saving Lamps, can only be dimmed if they are specifically marked as "dimmable". Dimmable CFLs may have different characteristics from brand to brand, and so each brand may require a specific type of dimmer to operate correctly. Using the incorrect dimmer may cause the CFL to flicker. Please read the documentation that comes with each CFL carefully to ensure that the CFL and dimmer are compatible. For more information, please contact HPM Legrand. In some cases, the dimmable CFL may turn off or flicker when dimmed to a very low brightness. This can be overcome by ensuring that the dimmer brightness is not set too low. See "Setting minimum brightness" for instructions on how to achieve this.

Wiring

One-way wiring diagram



Two-way wiring diagram

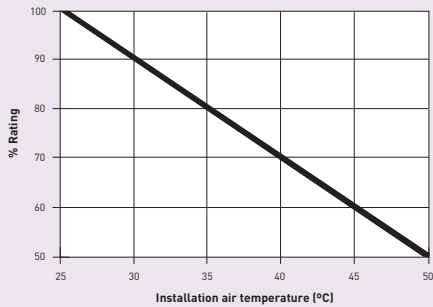

**Important:**  
When used in ambient temperatures greater than 25°C, the dimmer must be de-rated according to the following chart.

Excel Life™  
Time delay switches



EM802TDWE



EC923TWE

| Pack | Cat No.            |                         |
|------|--------------------|-------------------------|
| 10   | White<br>EM802TDWE | Urban Grey<br>EM802TDUG |
|      |                    |                         |
| 6    | EC923TWE           | -                       |

Time delay mechanisms


Programmable time delay switch, 2 wire all load 400VA, 230 - 240V a.c. Can be programmed from 1-10 minutes in steps of 1 minute.

Programmable time delay switch, 16A 230 - 240V a.c. Up to 8 weekly programmes, 20hrs working reserve

Excel Life™  
Time delay switches

Wiring  
EM802TD

■ Connect optional Momentary Push Switches (EM870X) to enable switching from multiple locations.

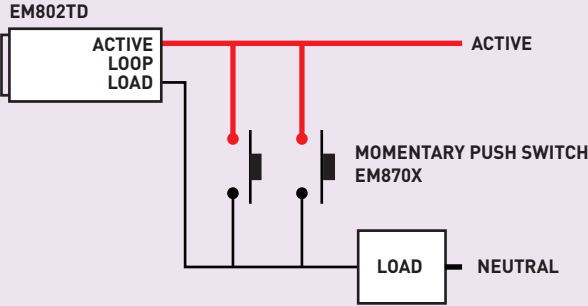

**Note:**  
EM870X available 2012

**Important:**  
An unlimited number of EM870X can be connected to an EM802TD. However, the total length of the load wire used to interconnect all of the EM870X should not exceed 50 metres.

Technical characteristics  
EM802TD

|                             |  |                                |              |         |                  |                       |                        |                     |       |           |
|-----------------------------|--|--------------------------------|--------------|---------|------------------|-----------------------|------------------------|---------------------|-------|-----------|
| <br>230 - 240V a.c.<br>50Hz |  | <br>1 x 2.5 mm²<br>2 x 1.5 mm² | Incandescent | Halogen | Fluorescent tube | Wirewound transformer | Electronic transformer | Compact fluorescent | LED   | Fan motor |
| Max load                    |  |                                | 400W         | 400W    | 400VA*           | X                     | 400VA                  | 400VA               | 400VA | X         |

Minimum load = 10VA for all load types

\* Electronic ballast only



Excel Life™  
Powerpoints - dedicated plate series




ED777WE ED774WE

| Pack | Cat No.    |            | Dedicated plate powerpoints                                                                                                                                                            |                                                                     |
|------|------------|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|
|      |            |            | Internal safety shutters on all powerpoints. Powerpoints with extra hole ready to be equipped with 240V 770 module mechanisms such as EM803SURGEWE (See p. 213) EMPAPS1WE (See p. 214) |                                                                     |
|      | White      | Urban Grey |                                                                                                                                                                                        |                                                                     |
| 10   | ED777WE    | ED777UG    |                                                                                                                                                                                        | Double powerpoint 10A, 230 - 240V a.c.                              |
| 10   | ED777XWE   | ED777XUG   |                                                                                                                                                                                        | Double powerpoint with extra function hole, 10A, 230 - 240V a.c.    |
| 10   | ED777/15WE | ED777/15UG |                                                                                                                                                                                        | Double powerpoint 15A 230 - 240V a.c.                               |
| 10   | ED787WE    | ED787UG    |                                                                                                                                                                                        | Single powerpoint 10A, 230 - 240V a.c.                              |
| 10   | ED787XWE   | ED787XUG   |                                                                                                                                                                                        | Single powerpoint with extra function hole, 10A, 230 - 240V a.c.    |
| 10   | ED787/2XWE | ED787/2XUG |                                                                                                                                                                                        | Single powerpoint with 2 extra function holes, 10A, 230 - 240V a.c. |
| 10   | ED787/15WE | ED787/15UG |                                                                                                                                                                                        | Single powerpoint 15A, 230 - 240V a.c.                              |
| 10   | ED7774WE   | ED7774UG   |                                                                                                                                                                                        | 4 gang powerpoint 10A, 230 - 240V a.c.                              |

Excel Life™  
Powerpoints - dedicated plate series

| Pack | Cat No.    |            | Dedicated plate powerpoints |                                                    |
|------|------------|------------|-----------------------------|----------------------------------------------------|
|      |            |            |                             |                                                    |
|      | White      | Urban Grey |                             |                                                    |
| 10   | ED787/25WE | ED787/25UG |                             | Single powerpoint 20A, 230 - 240V a.c.             |
| 10   | ED787/32WE | ED787/32UG |                             | Single powerpoint 32A, 230 - 240V a.c.             |
| 10   | ED777RWE   | ED777RUG   |                             | Double round-earth powerpoint 10A, 230 - 240V a.c. |
| 10   | ED787DPWE  | ED787DPUG  |                             | Single double-pole powerpoint 10A, 230 - 240V a.c. |
| 10   | ED787RWE   | ED787RUG   |                             | Single round-earth powerpoint 10A, 230 - 240V a.c. |
| 10   | ED787/20WE | ED787/20UG |                             | Single powerpoint 20A, 230 - 240V a.c.             |


Excel Life™  
Powerpoints - common plate series



EC777WE EC787WE

| Pack | Cat No.      | Common plate powerpoints                                                                                                                                                               |                                                                     |
|------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|
|      |              | Internal safety shutters on all powerpoints. Powerpoints with extra hole ready to be equipped with 240V 770 module mechanisms such as EM803SURGEWE (See p. 213) EMPAPS1WE (See p. 214) |                                                                     |
|      | White        |                                                                                                                                                                                        |                                                                     |
| 10   | EC777WE      |                                                                                                                                                                                        | Double powerpoint 10A, 230 - 240V a.c.                              |
| 10   | EC777XWE     |                                                                                                                                                                                        | Double powerpoint with extra function hole, 10A, 230 - 240V a.c.    |
| 10   | EC777/15WE   |                                                                                                                                                                                        | Double powerpoint 15A, 230 - 240V a.c.                              |
| 10   | EC777/15XWE  |                                                                                                                                                                                        | Double powerpoint with extra function hole, 15A, 230 - 240V a.c.    |
| 10   | EC787WE      |                                                                                                                                                                                        | Single powerpoint 10A, 230 - 240V a.c.                              |
| 10   | EC787/15WE   |                                                                                                                                                                                        | Single powerpoint 15A, 230 - 240V a.c.                              |
| 10   | EC787XWE     |                                                                                                                                                                                        | Single powerpoint with extra function hole, 10A, 230 - 240V a.c.    |
| 10   | EC787/2XWE   |                                                                                                                                                                                        | Single powerpoint with 2 extra function holes, 10A, 230 - 240V a.c. |
| 10   | EC777RWE     |                                                                                                                                                                                        | Double round-earth powerpoint 10A, 230 - 240V a.c.                  |
| 10   | EC787DPWE    |                                                                                                                                                                                        | Single double-pole powerpoint 10A, 230 - 240V a.c.                  |
| 10   | EC787/15DPWE |                                                                                                                                                                                        | Single double-pole powerpoint 15A, 230 - 240V a.c.                  |
| 10   | EC787/15XWE  |                                                                                                                                                                                        | Single extra-function powerpoint 15A, 230 - 240V a.c.               |
| 10   | EC787/20WE   |                                                                                                                                                                                        | Single powerpoint 20A, 230 - 240V a.c.                              |
| 10   | EC787/25WE   |                                                                                                                                                                                        | Single powerpoint 25A, 230 - 240V a.c.                              |
| 10   | EC787/32WE   |                                                                                                                                                                                        | Single powerpoint 32A, 230 - 240V a.c.                              |

Excel Life™  
Powerpoints - secure plate series  
Powerpoint mechanisms  
Surge protection




ES777WE EM803SURGEWE

| Pack | Cat No.                                                                             | Secure plate powerpoints                                                            |                                           |
|------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------|
|      |  |                                                                                     |                                           |
|      | White                                                                               |                                                                                     |                                           |
| 10   | ES777WE                                                                             |  | Double powerpoint<br>10A, 230 - 240V a.c. |
| 10   | ES787WE                                                                             |  | Single powerpoint<br>10A, 230 - 240V a.c. |

|    |             | Powerpoint mechanisms                                                                |                                                                              |
|----|-------------|--------------------------------------------------------------------------------------|------------------------------------------------------------------------------|
| 10 | EM787WE     |  | Single powerpoint<br>10A, 230 - 240V a.c.<br>mechanism only                  |
| 10 | EM787AWE    |                                                                                      | Single autoswitch powerpoint<br>mechanism only<br>10A, 230-240V a.c.         |
| 10 | EM787ARWE   |                                                                                      | Single round-earth autoswitch<br>powerpoint 10A, 230-240V a.c.               |
| 10 | EM787A/15WE |                                                                                      | Single autoswitch powerpoint<br>mechanism only<br>15A, 230-240V a.c.         |
| 10 | EM787U/20WE |                                                                                      | Single unswitched powerpoint<br>20A, 230-240V a.c.                           |
| 10 | EM787U/25WE |                                                                                      | Single gang unswitched<br>powerpoint<br>mechanism only<br>25A, 230-240V a.c. |
| 10 | EM787U/32WE |                                                                                      | Single unswitched powerpoint<br>mechanism only<br>32A, 230-240V a.c.         |

|    |  |  | Surge protection                                                                      |                                                             |
|----|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------------------------------------------------------|
|    | White                                                                                 | Urban Grey                                                                            |                                                                                       |                                                             |
| 10 | EM803-SURGEWE                                                                         | EM803-SURGEUG                                                                         |  | Mechanism surge<br>protection module<br>500J, 230-240V a.c. |

Excel Life™  
Indicator kits

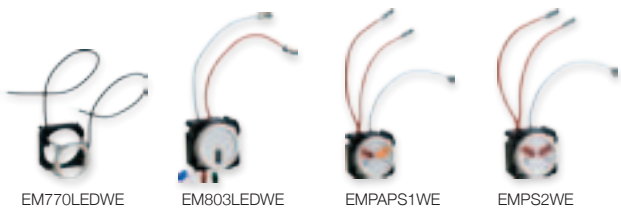

| Pack | Cat No.    |            | Illumination kits                                                       |
|------|------------|------------|-------------------------------------------------------------------------|
|      | White      | Urban Grey |                                                                         |
| 10   | EM770LEDWE | EM770LEDUG | EM770 illumination kit blue LED 230 - 240V a.c.                         |
| 10   | EM803LEDWE | EM803LEDUG | White LED and coloured lenses kit 230 - 240V a.c.                       |
| 10   | EMPAPS1WE  | EMPAPS1UG  | Power available and 1 gang power supplied indicator kit 230 - 240V a.c. |
| 10   | EMPAPS2WE  | EMPAPS2UG  | Power available and 2 gang power supplied indicator kit 230 - 240V a.c. |
| 10   | EMPAWE     | EMPAUG     | Power available indicator kit 230 - 240V a.c.                           |
| 10   | EMPS1WE    | EMPS1UG    | Power supplied to 1 outlet indicator kit 230 - 240V a.c.                |
| 10   | EMPS2WE    | EMPS2UG    | Power supplied to 2 outlets indicator kit 230 - 240V a.c.               |

Excel Life™  
Time delay switches

**Installation**  
EM770LED - LED 770 illumination kit

**Wiring**

Note: Low Impedance Load examples include incandescent, halogen, resistive loads  
High Impedance Load examples include CFL's, LED globes

**LED Power Available/Power Supplied Indicator Kits**  
EMPAPS2, EMPAPS1, EMPA, EMPS1, EMPS2, EM803LED

**Features**


- Voltage: 240V~
- Frequency: 50Hz
- Current: 1.2mA per indicator
- Operating temperature: -5°C to +50°C
- Storage temperature: -10°C to +70°C
- Resistant to the following agents: Hexane, methylated spirits, soapy water, diluted ammonia, diluted pure bleach (10%), glass cleaning sustance, pre-impregnated wipes, diluted hydrogen peroxide
- Not resistant to the following agents: Acetone, tar remover, trichloroethylene

Excel Life™  
LED power supplied/power available indicator kits

**Wiring**


| Wire/lead marking | EMPAPS2               | EMPAPS1         | EMPA    | EMPS2                 | EMPS1           | EM803LED (power available)++ | EM803LED (power supplied) | EM803LED (power available without neutral)** |
|-------------------|-----------------------|-----------------|---------|-----------------------|-----------------|------------------------------|---------------------------|----------------------------------------------|
| LED N             | Neutral               | Neutral         | Neutral | Neutral               | Neutral         | Neutral                      | Neutral                   | Switched active                              |
| LED L             | Switched Active (LHS) |                 |         | Switched Active (LHS) |                 |                              |                           |                                              |
| LED R             | Switched Active (RHS) |                 |         | Switched Active (RHS) |                 |                              |                           |                                              |
| LED               |                       | Switched active |         |                       | Switched active |                              |                           |                                              |
| A                 | Active                | Active          | Active  |                       |                 | Active                       | Switched active           | Active                                       |

++ = In this mode the LED indicator will be ON whenever there is power available to the product.  
\*\* = In this mode the LED indicator will only be ON whenever the associated switch/socket is OFF.  
The current required to light the indicator when the switch is ON will be bled through the load.

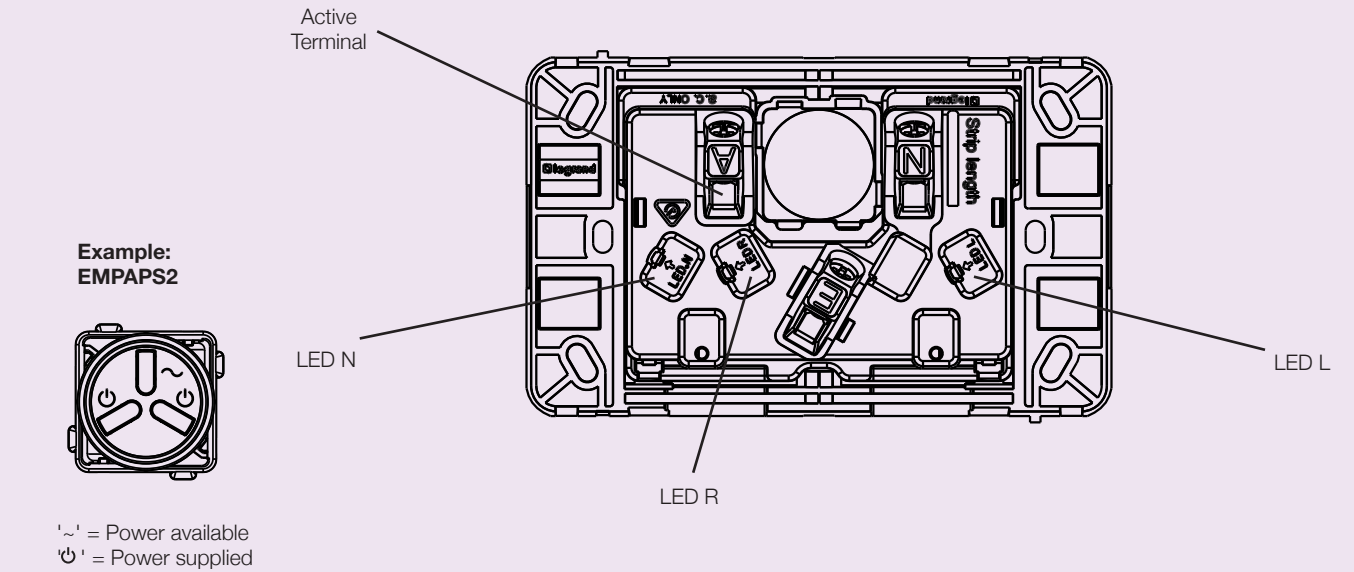

**Installation**  
EMPAPS2, EMPAPS1, EMPA, EMPS1, EMPS2, EM803LED  
LED Power Available/Power Supplied Indicator Kits

Excel Life™  
RJ11 Cat 3 voice sockets  
RJ45 Cat 5e sockets

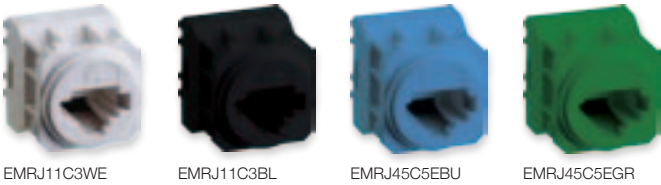


EMRJ11C3WE    EMRJ11C3BL    EMRJ45C5EBU    EMRJ45C5EGR

| Pack | Cat No.    | RJ11 voice sockets                                                                                 |                                |
|------|------------|----------------------------------------------------------------------------------------------------|--------------------------------|
|      |            | <b>Additional slot available for looping. Compatible with both Krone and IDC termination tools</b> |                                |
| 10   | EMRJ11C3WE |                   | CAT 3 RJ11 voice socket white  |
| 10   | EMRJ11C3BL |                   | CAT 3 RJ11 voice socket black  |
| 10   | EMRJ11C3BU |                   | CAT 3 RJ11 voice socket blue   |
| 10   | EMRJ11C3GR |                  | CAT 3 RJ11 voice socket green  |
| 10   | EMRJ11C3RD |                 | CAT 3 RJ11 voice socket red    |
| 10   | EMRJ11C3YE |                 | CAT 3 RJ11 voice socket yellow |

| Pack | Cat No.     | RJ45 data sockets CAT 5E                                                            |                                |
|------|-------------|-------------------------------------------------------------------------------------|--------------------------------|
|      |             | <b>Compatible with both Krone and IDC termination tools</b>                         |                                |
| 10   | EMRJ45C5EWE |  | CAT 5E RJ45 data socket white  |
| 10   | EMRJ45C5EBL |  | CAT 5E RJ45 data socket black  |
| 10   | EMRJ45C5EBU |  | CAT 5E RJ45 data socket blue   |
| 10   | EMRJ45C5EGR |  | CAT 5E RJ45 data socket green  |
| 10   | EMRJ45C5ERD |  | CAT 5E RJ45 data socket red    |
| 10   | EMRJ45C5EYE |  | CAT 5E RJ45 data socket yellow |

Excel Life™  
RJ45 Cat 6 data sockets  
TV outlets

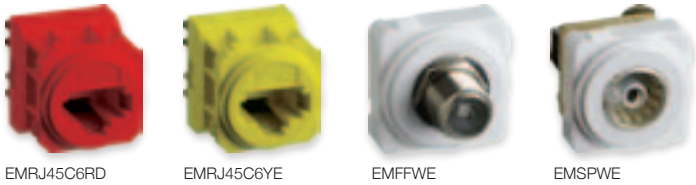


EMRJ45C6RD    EMRJ45C6YE    EMFFWE    EMSPWE

| Pack | Cat No.    | RJ45 data sockets CAT 6                                                              |                                |
|------|------------|--------------------------------------------------------------------------------------|--------------------------------|
|      |            | <b>Compatible with both Krone and IDC termination tools</b>                          |                                |
| 10   | EMRJ45C6WE |    | CAT 6, RJ45 data socket white  |
| 10   | EMRJ45C6BL |    | CAT 6, RJ45 data socket black  |
| 10   | EMRJ45C6BU |    | CAT 6, RJ45 data socket blue   |
| 10   | EMRJ45C6GR |   | CAT 6, RJ45 data socket green  |
| 10   | EMRJ45C6RD |  | CAT 6, RJ45 data socket red    |
| 10   | EMRJ45C6YE |  | CAT 6, RJ45 data socket yellow |

|    |  |  | TV outlets                                                                            |                                                         |
|----|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------|
| 10 | White<br>EMFFFOXWE                                                                  | Urban Grey<br>EMFFFOXUG                                                               |  | F to F TV outlet 75 ohm<br>2.4 GHz<br>(Foxtel approved) |
| 10 | EMFFWE                                                                              | EMFFUG                                                                                |  | F to F TV outlet<br>75 ohm                              |
| 10 | EMPFWE                                                                              | EMPFUG                                                                                |  | PAL to F TV outlet, white                               |
| 10 | EMSPWE                                                                              | EMSPUG                                                                                |  | PAL to saddle TV outlet white                           |

Excel Life™  
Data, audio and video sockets

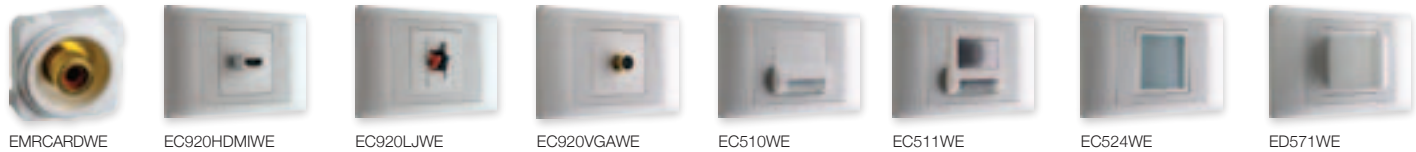

EMRCARDWE    EC920HDMIWE    EC920LJWE    EC920VGAWE    EC510WE    EC511WE    EC524WE    ED571WE

| Pack | Cat No.                                                                             |                                                                                     | Data, audio and video                                                                 |                                                |
|------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|------------------------------------------------|
|      |  |  |                                                                                       |                                                |
| 10   | EMRCARDWE                                                                           | EMRCARDUG                                                                           |    | RCA outlet - red                               |
| 10   | EMRCAWEWE                                                                           | EMRCAWEUG                                                                           |    | RCA outlet - white                             |
| 10   | EMRCAYEWE                                                                           | EMRCAYEUG                                                                           |    | RCA outlet - yellow                            |
| 10   | ECUSBWE                                                                             | -                                                                                   |    | USB type A female outlet                       |
| 6    | EC910J35WE                                                                          | -                                                                                   |  | 3.5mm female audio outlet                      |
| 4    | EC920-HDMIWE                                                                        | -                                                                                   |  | HDMI socket rear pluggable                     |
| 8    | EC920LJWE                                                                           | -                                                                                   |  | Loudspeaker outlet IP41, 6mm terminal capacity |
| 10   | EC920-MSVIDWE                                                                       | -                                                                                   |  | S-Video outlet mini din                        |
| 10   | EC920-VGAWE                                                                         | -                                                                                   |  | VGA outlet female connection                   |

Excel Life™  
Sensor lights and signalling

| Pack | Cat No.                                                                             | Sensor lights                                                                         |                                                         |
|------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------|
|      |  |                                                                                       |                                                         |
| 4    | EC511WE                                                                             |    | Skirting light with PIR sensor 1.3W max 230 - 240V a.c. |
| 6    | EC510WE                                                                             |    | Permanent skirting light 230 - 240V a.c.                |
| 6    | EC520WE                                                                             |    | Signal light white LED 1.0W max 230 - 240V a.c.         |
| 6    | EC521WE                                                                             |  | Signal light blue LED 1.0W max 230 - 240V a.c.          |
| 6    | EC524WE                                                                             |  | Signal light red/green LED 1.0W max 230 - 240V a.c.     |
| 4    | EC570WE                                                                             |  | Bulkhead light red LED 230 - 240V a.c.                  |
| 4    | EC571WE                                                                             |  | Bulkhead light white LED 230 - 240V a.c.                |
| 4    | EC572WE                                                                             |  | Bulkhead light green LED 230-240V a.c.                  |
| 4    | EC573WE                                                                             |  | Bulkhead light blue LED 230 - 240V a.c.                 |



Excel Life™  
Hospitality and commercial




| Pack                            | Cat No.          | Hospitality and commercial                                                          |                                                                                                     |
|---------------------------------|------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| 4                               | White<br>EC915WE |    | Emergency stop push button<br>1/4 turn 3AX<br>230 - 240V a.c.                                       |
| 6                               | EC918WE          |    | Electronic bell                                                                                     |
| 10                              | EAKEYFOB         |    | Key fob<br>230 - 240V a.c.                                                                          |
| 10                              | ECKFSWE          |   | Common plate series<br>electronic key fob switch with<br>30 second time delay<br>230 - 240V a.c.    |
| 10                              | EDKFSWE          |  | Dedicated plate series<br>electronic key fob switch with<br>30 second time delay<br>230 - 240V a.c. |
| 10                              | EC20A/4KTWE      |  | Common plate series mechanical<br>keytag switch white 4 x 20A<br>230-240V a.c.                      |
| 10                              | ED20A/4KTWE      |  | Dedicated plate series mechanical<br>keytag switch white 4 x 20A<br>230-240V a.c.                   |
| 10                              | ED20A/4KTUG      |  | Dedicated plate series mechanical<br>keytag switch urban grey 4 x 20A<br>230-240V a.c.              |
| 6                               | EC924WE          |  | Hotel corridor call indicator<br>6A, 230 - 240V a.c.                                                |
| 8                               | EC925WE          |  | Hotel guest room call control<br>10AX (fluoro rated)<br>230 - 240V a.c.                             |
| Shutter, blind, curtain control |                  |                                                                                     |                                                                                                     |
| 8                               | EC919WE          |  | Push button switch (via relay) 6A<br>230-240V a.c.                                                  |
| 8                               | EC920WE          |  | Push button switch (direct control)<br>6AX (fluoro rated) 230-240V a.c.                             |

Excel Life™  
Grids and plates



| Pack                                 | Cat No.               |                            | Dedicated plate series grids and plates                                               |                                                           |
|--------------------------------------|-----------------------|----------------------------|---------------------------------------------------------------------------------------|-----------------------------------------------------------|
| 10                                   | White<br>ED770/0GPLWE | Urban Grey<br>ED770/0GPLUG |    | Dedicated plate series blank grid<br>and coverplate only  |
| 10                                   | ED770/1GPLWE          | ED770/1GPLUG               |    | Dedicated plate series 1 gang grid<br>and coverplate only |
| 10                                   | ED770/2GPLWE          | ED770/2GPLUG               |    | Dedicated plate series 2 gang grid<br>and coverplate only |
| 10                                   | ED770/3GPLWE          | ED770/3GPLUG               |   | Dedicated plate series 3 gang grid<br>and coverplate only |
| 10                                   | ED770/4GPLWE          | ED770/4GPLUG               |  | Dedicated plate series 4 gang grid<br>and coverplate only |
| 10                                   | ED770/5GPLWE          | ED770/5GPLUG               |  | Dedicated plate series 5 gang grid<br>and coverplate only |
| 10                                   | ED770/6GPLWE          | ED770/6GPLUG               |  | Dedicated plate series 6 gang grid<br>and coverplate only |
| Common plate series grids and plates |                       |                            |                                                                                       |                                                           |
| 10                                   | White<br>EC770/0GPLWE |                            |  | Common plate series<br>grid and cover only                |
| 10                                   | EC770/1GPLWE          |                            |  | Common plate series<br>1 gang grid and coverplate only    |
| 10                                   | EC770/2GPLWE          |                            |  | Common plate series<br>2 gang grid and coverplate only    |
| 10                                   | EC770/3GPLWE          |                            |  | Common plate series<br>3 gang grid and coverplate only    |

Excel Life™  
Grids and plates

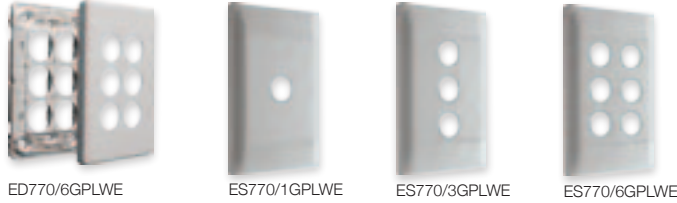


| Pack                                 | Cat No.               | Common plate series grids and plates                                                  |                                                           |
|--------------------------------------|-----------------------|---------------------------------------------------------------------------------------|-----------------------------------------------------------|
| 10                                   | White<br>EC770/4GPLWE |    | Common plate series<br>4 gang grid and coverplate only    |
| 10                                   | EC770/5GPLWE          |    | Common plate series<br>5 gang grid and coverplate only    |
| 10                                   | EC770/6GPLWE          |    | Common plate series<br>6 gang grid and coverplate only    |
| 10                                   | ECCWGPLWE             |   | Deep mounting block and cover<br>plate common series only |
| Secure plate series grids and plates |                       |                                                                                       |                                                           |
| 10                                   | ES770/0GPLWE          |  | Secure plate series<br>grid and coverplate only           |
| 10                                   | ES770/1GPLWE          |  | Secure plate series<br>1 gang grid and coverplate only    |
| 10                                   | ES770/2GPLWE          |  | Secure plate series<br>2 gang grid and coverplate only    |
| 10                                   | ES770/3GPLWE          |  | Secure plate series<br>3 gang grid and coverplate only    |
| 10                                   | ES770/4GPLWE          |  | Secure plate series<br>4 gang grid and coverplate only    |
| 10                                   | ES770/5GPLWE          |  | Secure plate series<br>5 gang grid and coverplate only    |
| 10                                   | ES770/6GPLWE          |  | Secure plate series<br>6 gang grid and coverplate only    |

Excel Life™  
Grids and coverplates  
Module and architrave

| Pack                                                            | Cat No.                | Module grid and coverplate only                                                     |                                                                                                                                                         |
|-----------------------------------------------------------------|------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10                                                              | White<br>EC910GPLWE    |  | 1 module grid and coverplate only                                                                                                                       |
| <b>Architrave<br/>dedicated plate series<br/>grid and plate</b> |                        |                                                                                     |                                                                                                                                                         |
| 10                                                              | White<br>EDA770-1GPLWE | Urban Grey<br>EDA770-1GPLUG                                                         |  Dedicated plate series architrave 1 gang grid and coverplate only   |
| 10                                                              | EDA770-2GPLWE          | EDA770-2GPLUG                                                                       |  Dedicated plate series architrave 2 gang grid and coverplate only |
| 10                                                              | EDA770-3GPLWE          | EDA770-3GPLUG                                                                       |  Dedicated plate series architrave 2 gang grid and coverplate only |
| 10                                                              | EDA770-4GPLWE          | EDA770-4GPLUG                                                                       |  Dedicated plate series architrave 2 gang grid and coverplate only |



Excel Life™  
Cover plates

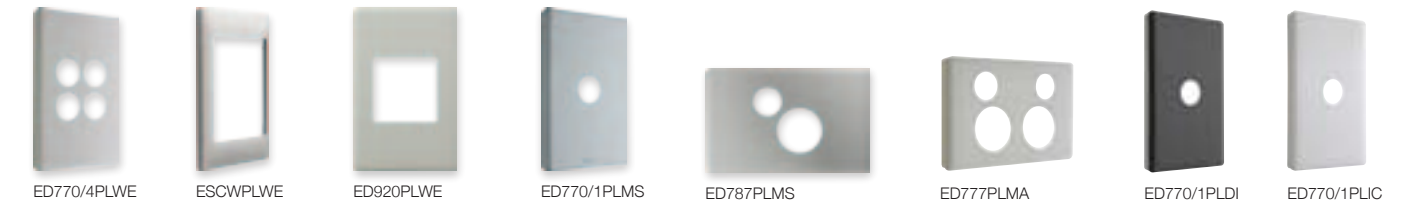

Dedicated Plate Switches - cover plate only

| Finish       |             |             |             |             |             |             |           |          |
|--------------|-------------|-------------|-------------|-------------|-------------|-------------|-----------|----------|
| White        | ED770/1PLWE | ED770/2PLWE | ED770/3PLWE | ED770/4PLWE | ED770/5PLWE | ED770/6PLWE | ED920PLWE | -        |
| Urban Grey   | ED770/1PLUG | ED770/2PLUG | ED770/3PLUG | ED770/4PLUG | ED770/5PLUG | ED770/6PLUG | ED920PLUG | -        |
| Matt Silver  | ED770/1PLMS | ED770/2PLMS | ED770/3PLMS | ED770/4PLMS | ED770/5PLMS | ED770/6PLMS | ED920PLMS | EDCWPLMS |
| Liquid Gloss |             |             |             |             |             |             |           |          |
| Ice          | ED770/1PLIC | ED770/2PLIC | ED770/3PLIC | ED770/4PLIC | ED770/5PLIC | ED770/6PLIC | ED920PLIC | EDCWPLIC |
| Malt         | ED770/1PLMA | ED770/2PLMA | ED770/3PLMA | ED770/4PLMA | ED770/5PLMA | ED770/6PLMA | ED920PLMA | EDCWPLMA |
| Diesel       | ED770/1PLDI | ED770/2PLDI | ED770/3PLDI | ED770/4PLDI | ED770/5PLDI | ED770/6PLDI | ED920PLDI | EDCWPLDI |

Dedicated Plate Powerpoints - cover plate only

| Finish      |           |           |            |
|-------------|-----------|-----------|------------|
| Matt Silver | ED787PLMS | ED777PLMS | ED777XPLMS |
| Ice         | ED787PLIC | ED777PLIC | ED777XPLIC |
| Malt        | ED787PLMA | ED777PLMA | ED777XPLMA |
| Diesel      | ED787PLDI | ED777PLDI | ED777XPLDI |

Common Plate Series - cover plate only

| Finish |           |             |             |             |             |             |
|--------|-----------|-------------|-------------|-------------|-------------|-------------|
| White  | ECCW-PLWE | ECCW-2WPLWE | ECCW-3WPLWE | ECCW-2HPLWE | ECCW-3HPLWE | ECCW-4HPLWE |

Secure Plate Series - cover plate only

| Finish |          |
|--------|----------|
| White  | ESCWPLWE |

Excel Life™  
Accessories



| Pack | Cat No.    | Accessories                                              |
|------|------------|----------------------------------------------------------|
| 10   | ECFRAME    | Common plate series frame                                |
| 50   | EAPP       | Transparent paint and damage protection shell            |
| 1    | EAPWDSCREW | Public works department 1-4 gang mechanism retention kit |
| 10   | EAPWD5GKIT | Public works department 5-gang mechanism retention kit   |
| 10   | EAPWD6GKIT | Public works department 6-gang mechanism retention kit   |
| 10   | EM910RPWE  | Plug & cable retainer module white                       |


|    |                 |                      |                                       |
|----|-----------------|----------------------|---------------------------------------|
| 10 | White<br>EMCCWE | Urban Grey<br>EMCCUG | Cord clamp                            |
| 10 | EMCLIDWE        | EMCLIDUG             | Blank with clear cap suits 800 module |
| 10 | EMIDWE          | EMIDUG               | Blank, suits 800 module               |

Excel Life™  
Accessories  
Brackets


| Pack | Cat No.  | Accessories - multi-gang brackets |
|------|----------|-----------------------------------|
| 10   | EA143/2W | 2 gang horizontal stud-bracket    |
| 10   | EA143/3W | 3 gang horizontal stud-bracket    |
| 10   | EA143/2H | 2 gang vertical stud-bracket      |
| 10   | EA143/3H | 3 gang vertical stud-bracket      |
| 10   | EA143/4H | 4 gang vertical stud-bracket      |
| 10   | EA503/2W | 2 gang horizontal render-bracket  |
| 10   | EA503/3W | 3 gang horizontal render-bracket  |
| 10   | EA503/2H | 2 gang vertical render-bracket    |
| 10   | EA503/3H | 3 gang vertical render-bracket    |
| 10   | EA503/4H | 4 gang vertical render-bracket    |

# Arteor™ Wiring Accessories and ZigBee® Wireless Technology


## Arteor™ wiring accessories




**P. 238**  
Switches




**P. 239**  
Grids and grids  
with mechanisms




**P. 240**  
Electronic  
switches




**P. 241**  
Push-buttons




**P. 242**  
Automatic,  
switches




**P. 242**  
Dimmers




**P. 243**  
Lighting  
control  
visual  
indication




**P. 244**  
Ventilation, heating  
control, roller blinds  
and curtain switches




**P. 245**  
Hotel  
equipment




**P. 250**  
Access  
control




**P. 251**  
Standard socket  
outlets




**P. 252**  
Television,  
telephone and  
data sockets




**P. 254**  
Ethernet  
switches,  
Wi-Fi access  
point




**P. 255**  
Adaptors for data  
sockets and USB  
sockets




**P. 256**  
Audio  
and video  
sockets




**P. 258**  
Ancillary  
mechanisms,  
blanking plates



**P. 258**  
Support frames




**P. 259**  
Plates




**P. 268**  
Lighting control  
and automation  
mechanisms



**P. 269**  
Touch  
plates



**P. 269**  
Other  
functions












**P. 270**  
Switches,  
dimmers  
max. loads  
(selection chart)





## ZigBee® wireless technology

Arteor™ quick reference guide

Wiring devices
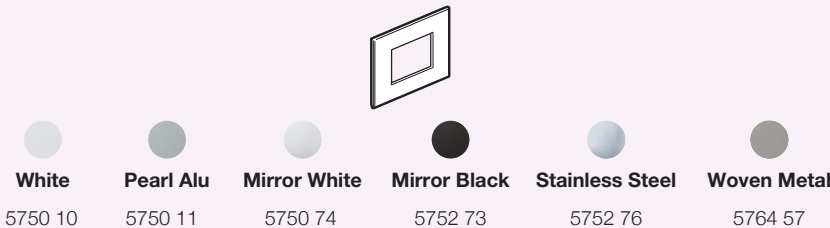
| Device                | Description                                                       | Mechanism                                                                                          |                                                                                                    | Support frame                                                                                      |                                                                                                   |                                                                                                                                          | Plates                                                                                                                                   |                                                                                                                                   |                                                                                                                                        |                                                                                                                                    |                         |                         |                                                                                                                                  |                        |                         |                         |                       |                         |
|-----------------------|-------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-------------------------|----------------------------------------------------------------------------------------------------------------------------------|------------------------|-------------------------|-------------------------|-----------------------|-------------------------|
| Single socket outlets | 10A single switched socket outlet (3 module)                      | <br>White         | <br>Magnesium     | <br>AR787AMWE   | <br>AR787AMMGN | +                                                                                                                                        | <br>5719 20<br>Horizontal use only for 2 or 3 modules | +                                                                                                                                 | <br>For full selection of plates see page 259 - 263 |                                                                                                                                    |                         |                         |                                                                                                                                  |                        |                         |                         |                       |                         |
|                       | 15A single switched socket outlet (3 module)                      | 5719 17                                                                                            | 5719 67                                                                                            | <br>AR787/15AMWE | AR787/15AMMGN                                                                                     |                                                                                                                                          |                                                                                                                                          |                                                                                                                                   | White<br>5750 10                                                                                                                       | Pearl Alu<br>5750 11                                                                                                               | Mirror White<br>5750 74 | Mirror Black<br>5752 73 | Stainless Steel<br>5752 76                                                                                                       | Woven Metal<br>5764 57 |                         |                         |                       |                         |
|                       | 10A single switched socket outlet with round earth (3 module)     | <br>(1 Module)    | <br>(2 Module)   | AR787ARMWE                                                                                         | AR787ARMMGN                                                                                       |                                                                                                                                          |                                                                                                                                          |                                                                                                                                   |                                                                                                                                        |                                                                                                                                    |                         |                         |                                                                                                                                  |                        |                         |                         |                       |                         |
|                       | 10A single switched socket outlet (3 module)                      | <br>(3 Module)   | AR787WE                                                                                            | AR787MGN                                                                                           |                                                                                                   |                                                                                                                                          |                                                                                                                                          |                                                                                                                                   |                                                                                                                                        |                                                                                                                                    |                         |                         |                                                                                                                                  |                        |                         |                         |                       |                         |
|                       | 10A single autoswitched socket outlet (2 module)                  | <br>(2 Module)   | AR787AMWE                                                                                          | AR787AMMGN                                                                                         | +                                                                                                 | <br>5719 20<br>Horizontal use only for 2 or 3 modules | OR                                                                                                                                       | <br>5719 10<br>Vertical use only for 2 modules | +                                                                                                                                      | Horizontal Installation<br><br>White<br>5752 30 |                         |                         | Vertical Installation<br><br>White<br>5752 50 |                        |                         |                         |                       |                         |
|                       | 15A single autoswitched socket outlet (2 module)                  | <br>(2 Module)   | AR787/15AMWE                                                                                       | AR787/15AMMGN                                                                                      |                                                                                                   |                                                                                                                                          |                                                                                                                                          |                                                                                                                                   |                                                                                                                                        | Pearl Alu<br>5752 31                                                                                                               |                         |                         | Graphite<br>5752 32                                                                                                              |                        |                         |                         |                       |                         |
|                       | 10A single autoswitched socket outlet with round earth (2 module) | <br>(2 Module) | AR787ARMWE                                                                                         | AR787ARMMGN                                                                                        |                                                                                                   |                                                                                                                                          |                                                                                                                                          |                                                                                                                                   |                                                                                                                                        | For full selection of plates see page 259 - 263                                                                                    |                         |                         | For full selection of plates see page 259 - 263                                                                                  |                        |                         |                         |                       |                         |
| Double socket outlets | 10A double switched socket outlet                                 | Australian standard size with integrated support frame                                             | <br>AR777WE    | AR777MGN                                                                                           | +                                                                                                 | N/A<br>Integrated support frames                                                                                                         |                                                                                                                                          |                                                                                                                                   | +                                                                                                                                      | <br>White<br>5754 30                          |                         |                         |                                                                                                                                  |                        | Pearl Alu<br>5754 31    | Graphite<br>5754 32     | Edition 1<br>5764 78  | Casual<br>5764 71       |
|                       | 10A double autoswitched socket outlet                             | Australian standard size with integrated support frame                                             | <br>AR777AWE   | AR777AMGN                                                                                          |                                                                                                   |                                                                                                                                          |                                                                                                                                          |                                                                                                                                   |                                                                                                                                        | Formal<br>5764 72                                                                                                                  |                         |                         |                                                                                                                                  |                        | Mirror White<br>5754 34 | Mirror Black<br>5754 33 | Mirror Red<br>5764 76 | Mirror Taupe<br>5764 75 |
| Complete switches     | 16AX 1 gang switch vertical                                       | Australian standard size with integrated support frame                                             | <br>AR770/1WE  | AR770/1MGN                                                                                         |                                                                                                   |                                                                                                                                          |                                                                                                                                          |                                                                                                                                   |                                                                                                                                        | Stainless Steel<br>5754 36                                                                                                         |                         |                         |                                                                                                                                  |                        | Gold Brass<br>5764 70   | Wenge Style<br>5754 35  | Light Oak<br>5764 79  | Club<br>5764 73         |
|                       | 16AX 1 gang switch horizontal                                     | Australian standard size with integrated support frame                                             | <br>AR770/1HWE | AR770/1HMGN                                                                                        |                                                                                                   |                                                                                                                                          |                                                                                                                                          |                                                                                                                                   |                                                                                                                                        | Galuchat<br>5764 74                                                                                                                |                         |                         |                                                                                                                                  |                        | Woven Metal<br>5764 77  |                         |                       |                         |
|                       | 16AX 4 gang switch horizontal                                     | Australian standard size with integrated support frame                                             | <br>AR770/4HWE | AR770/4HMGN                                                                                        |                                                                                                   |                                                                                                                                          |                                                                                                                                          |                                                                                                                                   |                                                                                                                                        |                                                                                                                                    |                         |                         |                                                                                                                                  |                        |                         |                         |                       |                         |
|                       | 16AX 6 gang switch horizontal                                     | Australian standard size with integrated support frame                                             | <br>AR770/6HWE | AR770/6HMGN                                                                                        |                                                                                                   |                                                                                                                                          |                                                                                                                                          |                                                                                                                                   |                                                                                                                                        |                                                                                                                                    |                         |                         |                                                                                                                                  |                        |                         |                         |                       |                         |

Arteor™ quick reference guide  
Wiring devices

| Device                      | Description                                     | Mechanism                                                                                                                                                                                                                                                                                                                               |                                                                                                      |                                                                                               | Support frame |                                                                                                                                                     |    |                                                                                                                                              | Plates |                                                                                                        |                                                                                                                                                     |                                                                                                          |                                                                                                            |                                                                                                           |                                                                                                        |                                                                                                            |                                                                                                           |                                                                                                            |                                                                                                           |
|-----------------------------|-------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|----|----------------------------------------------------------------------------------------------------------------------------------------------|--------|--------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
|                             |                                                 |                                                                                                                                                                                                                                                                                                                                         |                                                                                                      |                                                                                               |               | Horizontal                                                                                                                                          |    | Vertical                                                                                                                                     |        | Horizontal Installation                                                                                |                                                                                                                                                     | Vertical Installation                                                                                    |                                                                                                            |                                                                                                           |                                                                                                        |                                                                                                            |                                                                                                           |                                                                                                            |                                                                                                           |
| Square<br>Data socket       | Square Cat. 5e RJ45 socket                      | <br>(2 Module)                                                                                                                                                                                                                                         |  White<br>5723 15 |  Magnesium | +             | <br>5719 20<br>Horizontal<br>use only<br>for 2 or 3<br>modules   | OR | <br>5719 10<br>Vertical<br>use only<br>for 2<br>modules   | +      |  White<br>5752 30   |                                                                                                                                                     |                                                                                                          |  Pearl Alu<br>5752 31   |  Graphite<br>5752 32   |  White<br>5752 50   |                                                                                                            |                                                                                                           |  Pearl Alu<br>5752 51   |  Graphite<br>5752 52   |
| Square<br>complete switches | 16AX square<br>1 gang switch                    | <br>(2 Module)                                                                                                                                                                                                                                         | 5719 19                                                                                              | 5719 69                                                                                       |               |                                                                                                                                                     |    |                                                                                                                                              |        | For full selection of plates see page 259 - 263                                                        |                                                                                                                                                     |                                                                                                          | For full selection of plates see page 259 - 263                                                            |                                                                                                           |                                                                                                        |                                                                                                            |                                                                                                           |                                                                                                            |                                                                                                           |
|                             | 16AX square<br>1 gang switch with LED indicator | <br>(2 Module)                                                                                                                                                                                                                                         | 5719 29                                                                                              | 5719 79                                                                                       |               |                                                                                                                                                     |    |                                                                                                                                              |        | For full selection of plates see page 259 - 263                                                        |                                                                                                                                                     |                                                                                                          | For full selection of plates see page 259 - 263                                                            |                                                                                                           |                                                                                                        |                                                                                                            |                                                                                                           |                                                                                                            |                                                                                                           |
|                             | 16AX square<br>2 gang switch                    | 2 x <br>(1 Module)                                                                                                                                                                                                                                     | 5719 17                                                                                              | 5719 67                                                                                       |               |                                                                                                                                                     |    |                                                                                                                                              |        | For full selection of plates see page 259 - 263                                                        |                                                                                                                                                     |                                                                                                          | For full selection of plates see page 259 - 263                                                            |                                                                                                           |                                                                                                        |                                                                                                            |                                                                                                           |                                                                                                            |                                                                                                           |
|                             | 20AX square<br>3 gang switch                    | <br>(2 Module)                                                                                                                                                                                                                                         | 5720 44                                                                                              | 5725 44                                                                                       |               |                                                                                                                                                     |    |                                                                                                                                              |        | For full selection of plates see page 259 - 263                                                        |                                                                                                                                                     |                                                                                                          | For full selection of plates see page 259 - 263                                                            |                                                                                                           |                                                                                                        |                                                                                                            |                                                                                                           |                                                                                                            |                                                                                                           |
|                             | 16AX square<br>3 gang horizontal switch         | 3 x <br>(1 Module)                                                                                                                                                                                                                                    | 5719 17                                                                                              | 5719 67                                                                                       | +             | <br>5719 20<br>Horizontal<br>use only<br>for 2 or 3<br>modules   | OR | N/A                                                                                                                                          | +      |  White<br>5750 10  |  Pearl Alu<br>5750 11                                           |  Graphite<br>5750 12 | N/A                                                                                                        |                                                                                                           |                                                                                                        | N/A                                                                                                        |                                                                                                           |                                                                                                            |                                                                                                           |
| Round<br>AV Socket          | Round 3 x female RCA                            | <br>(2 Module)                                                                                                                                                                                                                                       | 5732 73                                                                                              | 5737 73                                                                                       | +             | <br>5719 20<br>Horizontal<br>use only<br>for 2 or 3<br>modules | OR | <br>5719 10<br>Vertical<br>use only<br>for 2<br>modules | +      |  White<br>5756 20 |                                                                                                                                                     |                                                                                                          |  Pearl Alu<br>5756 21 |  Graphite<br>5756 22 |  White<br>5756 30 |                                                                                                            |                                                                                                           |  Pearl Alu<br>5756 31 |  Graphite<br>5756 32 |
| Round<br>complete switches  | 16AX round<br>1 gang switch                     | <br>(2 Module)                                                                                                                                                                                                                                       | 5719 39                                                                                              | 5719 89                                                                                       |               |                                                                                                                                                     |    |                                                                                                                                              |        | For full selection of plates see page 259 - 263                                                        |                                                                                                                                                     |                                                                                                          | For full selection of plates see page 259 - 263                                                            |                                                                                                           |                                                                                                        |                                                                                                            |                                                                                                           |                                                                                                            |                                                                                                           |
|                             | 16AX round<br>1 gang switch with LED indicator  | <br>(2 Module)                                                                                                                                                                                                                                       | 5719 49                                                                                              | 5719 99                                                                                       |               |                                                                                                                                                     |    |                                                                                                                                              |        | For full selection of plates see page 259 - 263                                                        |                                                                                                                                                     |                                                                                                          | For full selection of plates see page 259 - 263                                                            |                                                                                                           |                                                                                                        |                                                                                                            |                                                                                                           |                                                                                                            |                                                                                                           |
|                             | 16AX round<br>2 gang switch                     | <br>(1 Module left)<br>+<br><br>(1 Module right)                                                                                                                  | 5719 36<br>5719 38                                                                                   | 5719 86<br>5719 88                                                                            |               |                                                                                                                                                     |    |                                                                                                                                              |        | For full selection of plates see page 259 - 263                                                        |                                                                                                                                                     |                                                                                                          | For full selection of plates see page 259 - 263                                                            |                                                                                                           |                                                                                                        |                                                                                                            |                                                                                                           |                                                                                                            |                                                                                                           |
|                             | 20AX round<br>3 gang switch                     | <br>(2 Module)                                                                                                                                                                                                                                       | 5730 73                                                                                              | 5731 73                                                                                       |               |                                                                                                                                                     |    |                                                                                                                                              |        | For full selection of plates see page 259 - 263                                                        |                                                                                                                                                     |                                                                                                          | For full selection of plates see page 259 - 263                                                            |                                                                                                           |                                                                                                        |                                                                                                            |                                                                                                           |                                                                                                            |                                                                                                           |
|                             | 16AX round<br>3 gang horizontal switch          | <br>(1 Module left)<br>+<br><br>(1 Module middle)<br>+<br><br>(1 Module right) | 5719 36<br>5719 87<br>5719 38                                                                        | 5719 86<br>5719 87<br>5719 88                                                                 |               |                                                                                                                                                     |    |                                                                                                                                              |        | +                                                                                                      | <br>5719 20<br>Horizontal<br>use only<br>for 2 or 3<br>modules | OR                                                                                                       | N/A                                                                                                        | +                                                                                                         |  White<br>5755 00 |  Pearl Alu<br>5755 01 |  Graphite<br>5755 02 | N/A                                                                                                        |                                                                                                           |



Arteor™ quick reference guide  
Coverplates for standard wiring devices with 83.5 mounting centres

| Number of modules per mechanism                                                                                                                                                                                                                    | Flush-mounting accessories        | Support frames | Plates                                                                              | PLATES  |           |          |           |         |         |  | PLATES       |              |            |              |                 |            |             |           |         |          |             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|----------------|-------------------------------------------------------------------------------------|---------|-----------|----------|-----------|---------|---------|--|--------------|--------------|------------|--------------|-----------------|------------|-------------|-----------|---------|----------|-------------|
|                                                                                                                                                                                                                                                    |                                   |                |                                                                                     | Neutral |           |          | Tattoo    | Graphic |         |  | Mirror       |              |            |              | Brushed metal   |            | Wood        |           | Leather |          | Signature   |
|                                                                                                                                                                                                                                                    |                                   |                |                                                                                     | White   | Pearl Alu | Graphite | Edition 1 | Casual  | Formal  |  | Mirror White | Mirror Black | Mirror Red | Mirror Taupe | Stainless Steel | Gold Brass | Wenge Style | Light Oak | Club    | Galuchat | Woven Metal |
| <div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div> |                                   |                |                                                                                     |         |           |          |           |         |         |  |              |              |            |              |                 |            |             |           |         |          |             |
| SQUARE VERSION HORIZONTAL                                                                                                                                                                                                                          |                                   |                |                                                                                     |         |           |          |           |         |         |  |              |              |            |              |                 |            |             |           |         |          |             |
| 2 modules and 1.2" touch screen                                                                                                                                                                                                                    | Standard installation accessories | 5719 20        |    | 5752 30 | 5752 31   | 5752 32  | 5764 38   | 5764 31 | 5764 32 |  | 5752 54      | 5752 53      | 5764 36    | 5764 35      | 5752 56         | 5764 30    | 5752 55     | 5764 39   | 5764 33 | 5764 34  | 5764 37     |
| 3 modules                                                                                                                                                                                                                                          |                                   | 5719 20        |    | 5750 10 | 5750 11   | 5750 12  | 5764 58   | 5764 51 | 5764 52 |  | 5752 74      | 5752 73      | 5764 56    | 5764 55      | 5752 76         | 5764 50    | 5752 75     | 5764 59   | 5764 53 | 5764 54  | 5764 57     |
| Blanking cover plate                                                                                                                                                                                                                               |                                   | –              |    | 5754 10 | 5754 11   | 5754 12  | -         | -       | -       |  | -            | -            | -          | -            | -               | -          | -           | -         | -       | -        | -           |
| SQUARE VERSION VERTICAL                                                                                                                                                                                                                            |                                   |                |                                                                                     |         |           |          |           |         |         |  |              |              |            |              |                 |            |             |           |         |          |             |
| 2 modules and 1.2" touch screen                                                                                                                                                                                                                    | Standard installation accessories | 5719 10        |    | 5752 50 | 5752 51   | 5752 52  | 5764 38   | 5764 31 | 5764 32 |  | 5752 54      | 5752 53      | 5764 36    | 5764 35      | 5752 56         | 5764 30    | 5752 55     | 5764 39   | 5764 33 | 5764 34  | 5764 37     |
| ROUND VERSION HORIZONTAL                                                                                                                                                                                                                           |                                   |                |                                                                                     |         |           |          |           |         |         |  |              |              |            |              |                 |            |             |           |         |          |             |
| 2 modules                                                                                                                                                                                                                                          | Standard installation accessories | 5719 20        |    | 5756 20 | 5756 21   | 5756 22  | 5764 28   | 5764 21 | 5764 22 |  | 5756 34      | 5756 33      | 5764 26    | 5764 25      | 5756 36         | 5764 20    | 5756 35     | 5764 29   | 5764 23 | 5764 24  | 5764 27     |
| 3 modules                                                                                                                                                                                                                                          |                                   | 5719 20        |  | 5755 00 | 5755 01   | 5755 02  | 5764 48   | 5764 41 | 5764 42 |  | 5756 54      | 5756 53      | 5764 46    | 5764 45      | 5756 56         | 5764 40    | 5756 55     | 5764 49   | 5764 43 | 5764 44  | 5764 47     |
| ROUND VERSION VERTICAL                                                                                                                                                                                                                             |                                   |                |                                                                                     |         |           |          |           |         |         |  |              |              |            |              |                 |            |             |           |         |          |             |
| 2 modules                                                                                                                                                                                                                                          | Standard installation accessories | 5719 10        |  | 5756 30 | 5756 31   | 5756 32  | 5764 28   | 5764 21 | 5764 22 |  | 5756 34      | 5756 33      | 5764 26    | 5764 25      | 5756 36         | 5764 20    | 5756 35     | 5764 29   | 5764 23 | 5764 24  | 5764 27     |
| AUSTRALIAN VERSION                                                                                                                                                                                                                                 |                                   |                |                                                                                     |         |           |          |           |         |         |  |              |              |            |              |                 |            |             |           |         |          |             |
| 770 series switches, double switched and double autoswitched power points                                                                                                                                                                          | Standard installation accessories | –              |  | 5754 30 | 5754 31   | 5754 32  | 5764 78   | 5764 71 | 5764 72 |  | 5754 34      | 5754 33      | 5764 76    | 5764 75      | 5754 36         | 5764 70    | 5754 35     | 5764 79   | 5764 73 | 5764 74  | 5764 77     |

Arteor™ quick reference guide  
Coverplates for Zigbee & BUS/SCS products with standard 83.5 mm mounting centres

| Number of modules per mechanism | Masonry boxes                     | Flush-mounting boxes for dry partitions | Support frames | Plates                                                                            | PLATES                                                                            |                                                                                   |                                                                                   |                                                                                     |                                                                                     |                                                                                     | PLATES |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|---------------------------------|-----------------------------------|-----------------------------------------|----------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                 |                                   |                                         |                |                                                                                   | Neutral                                                                           |                                                                                   |                                                                                   | Tattoo                                                                              | Graphic                                                                             |                                                                                     |        | Mirror                                                                              |                                                                                     |                                                                                     |                                                                                     | Brushed metal                                                                       |                                                                                     | Wood                                                                                |                                                                                     | Leather                                                                             |                                                                                     | Signature                                                                           |
|                                 |                                   |                                         |                |                                                                                   | White                                                                             | Pearl Alu                                                                         | Graphite                                                                          | Edition 1                                                                           | Casual                                                                              | Formal                                                                              |        | Mirror White                                                                        | Mirror Black                                                                        | Mirror Red                                                                          | Mirror Taupe                                                                        | Stainless Steel                                                                     | Gold Brass                                                                          | Wenge Style                                                                         | Light Oak                                                                           | Club                                                                                | Galuchat                                                                            | Woven Metal                                                                         |
|                                 |                                   |                                         |                |                                                                                   |  |  |  |  |  |  |        |  |  |  |  |  |  |  |  |  |  |  |
| SQUARE VERSION HORIZONTAL       |                                   |                                         |                |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |                                                                                     |        |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 2 modules and 1.2" touch screen | Standard installation accessories |                                         | 5719 20        |  | 5752 30                                                                           | 5752 31                                                                           | 5752 32                                                                           | 5764 38                                                                             | 5764 31                                                                             | 5764 32                                                                             |        | 5752 54                                                                             | 5752 53                                                                             | 5764 36                                                                             | 5764 35                                                                             | 5752 56                                                                             | 5764 30                                                                             | 5752 55                                                                             | 5764 39                                                                             | 5764 33                                                                             | 5764 34                                                                             | 5764 37                                                                             |
| SQUARE VERSION VERTICAL         |                                   |                                         |                |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |                                                                                     |        |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 2 modules and 1.2" touch screen | Standard installation accessories |                                         | 5719 10        |  | 5752 50                                                                           | 5752 51                                                                           | 5752 52                                                                           | 5764 38                                                                             | 5764 31                                                                             | 5764 32                                                                             |        | 5752 54                                                                             | 5752 53                                                                             | 5764 36                                                                             | 5764 35                                                                             | 5752 56                                                                             | 5764 30                                                                             | 5752 55                                                                             | 5764 39                                                                             | 5764 33                                                                             | 5764 34                                                                             | 5764 37                                                                             |
| ROUND VERSION HORIZONTAL        |                                   |                                         |                |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |                                                                                     |        |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 2 modules                       | Standard installation accessories |                                         | 5719 20        |  | 5756 20                                                                           | 5756 21                                                                           | 5756 22                                                                           | 5764 28                                                                             | 5764 21                                                                             | 5764 22                                                                             |        | 5756 34                                                                             | 5756 33                                                                             | 5764 26                                                                             | 5764 25                                                                             | 5756 36                                                                             | 5764 20                                                                             | 5756 35                                                                             | 5764 29                                                                             | 5764 23                                                                             | 5764 24                                                                             | 5764 27                                                                             |
| 3 modules                       |                                   |                                         | 5719 20        |  | 5755 00                                                                           | 5755 01                                                                           | 5755 02                                                                           | 5764 48                                                                             | 5764 41                                                                             | 5764 42                                                                             |        | 5756 54                                                                             | 5756 53                                                                             | 5764 46                                                                             | 5764 45                                                                             | 5756 56                                                                             | 5764 40                                                                             | 5756 55                                                                             | 5764 49                                                                             | 5764 43                                                                             | 5764 44                                                                             | 5764 47                                                                             |
| ROUND VERSION VERTICAL          |                                   |                                         |                |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |                                                                                     |        |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 2 modules                       | Standard installation accessories |                                         | 5719 10        |  | 5756 30                                                                           | 5756 31                                                                           | 5756 32                                                                           | 5764 28                                                                             | 5764 21                                                                             | 5764 22                                                                             |        | 5756 34                                                                             | 5756 33                                                                             | 5764 26                                                                             | 5764 25                                                                             | 5756 36                                                                             | 5764 20                                                                             | 5756 35                                                                             | 5764 29                                                                             | 5764 23                                                                             | 5764 24                                                                             | 5764 27                                                                             |

Arteor™ quick reference guide  
Coverplates for Zigbee & BUS/SCS products - French & German 60 mm centres

|                           |            |        |                                     |                                                                                     |         |         |         |         |         |         |  |         |         |         |         |         |         |         |         |         |         |         |
|---------------------------|------------|--------|-------------------------------------|-------------------------------------------------------------------------------------|---------|---------|---------|---------|---------|---------|--|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| ROUND VERSION             |            |        |                                     |                                                                                     |         |         |         |         |         |         |  |         |         |         |         |         |         |         |         |         |         |         |
| 2 x 1 module<br>2 modules | 801 41     | 800 41 | 5760 21 (screws)<br>5760 20 (claws) |  | 5756 00 | 5756 01 | 5756 02 | 5762 38 | 5762 31 | 5762 32 |  | 5756 04 | 5756 03 | 5762 36 | 5762 35 | 5756 06 | 5762 30 | 5756 05 | 5762 39 | 5762 33 | 5762 34 | 5762 37 |
| 2 x 2 modules             | 2 x 801 41 | 800 42 | 2 x 5760 21                         |  | 5755 10 | 5755 11 | 5755 12 | 5762 58 | 5762 51 | 5762 52 |  | 5755 14 | 5755 13 | 5762 56 | 5762 55 | 5755 16 | 5762 50 | 5755 15 | 5762 59 | 5762 53 | 5762 54 | 5762 57 |
| 3 x 2 modules             | 3 x 801 41 | 800 43 | 3 x 5760 21                         |  | 5755 20 | 5755 21 | 5755 22 | -       | -       | -       |  | 5755 24 | 5755 23 | -       | -       | 5755 26 | -       | -       | -       | -       | -       | -       |

Arteor™ quick reference guide  
Special plates

|                                                                |                   |   |                                                                                     |                                                                                     |   |   |   |   |   |   |         |         |   |   |         |         |   |   |   |   |         |
|----------------------------------------------------------------|-------------------|---|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---|---|---|---|---|---|---------|---------|---|---|---------|---------|---|---|---|---|---------|
| Video internal display unit and 3.5" touch screen              |                   |   |  | -                                                                                   | - | - | - | - | - |   | 5764 84 | 5764 83 | - | - | 5764 86 | 5764 80 | - | - | - | - | 5764 87 |
| 10" multimedia touch screen                                    | -                 | - |  | -                                                                                   | - | - | - | - | - |   | 5765 14 | 5765 13 | - | - | 5765 16 | 5765 10 | - | - | - | - | 5765 17 |
| Central unit for:<br>- temperature control<br>- intruder alarm | Supplied with box |   | -                                                                                   |  | - | - | - | - | - | - | 5765 24 | 5765 23 | - | - | 5765 26 | 5765 20 | - | - | - | - | 5765 37 |

Arteor™ mechanical switches  
Square version



Support frames and plates selection chart (p. 234)


Mechanisms supplied with White, Magnesium or Red square rocker plates  
To be equipped with support frames and plates (p. 258 - 263)

| Pack                  | Cat. No. |           | Switches 16 AX - 250 V~  |                                                           |
|-----------------------|----------|-----------|--------------------------|-----------------------------------------------------------|
|                       | White    | Magnesium | Single module mechanisms |                                                           |
| 10                    | 5719 17  | 5719 67   |                          | 2-way switch                                              |
| 10                    | 5719 27  | 5719 77   |                          | 2-way switch with LED indicator (supplied with mechanism) |
| Two module mechanisms |          |           |                          |                                                           |
| 10                    | 5719 19  | 5719 69   |                          | 2-way switch                                              |
| 10                    | 5719 29  | 5719 79   |                          | 2-way switch with LED indicator (supplied with mechanism) |

|      | White   | Magnesium | Switches 20 AX - 250 V~  |                                                              |
|------|---------|-----------|--------------------------|--------------------------------------------------------------|
|      |         |           | Single module mechanisms |                                                              |
|      |         |           | 1 module 22.5 x 45 mm    |                                                              |
| 10   | 5720 10 | 5725 10   |                          | 2-way switch                                                 |
| 10   | 5720 11 | 5725 11   |                          | 2-way switch with indicator To be equipped with LED (p. 166) |
|      |         |           | Two module mechanisms    |                                                              |
|      |         |           | 2 modules 22.5 x 45 mm   |                                                              |
| 10 5 | 5720 42 | 5725 42   |                          | 2-way switch with indicator To be equipped with LED (p. 166) |
| 10   | 5720 44 | 5725 44   |                          | 2 x 2-way switch + 1-way switch 3 gang                       |
| 10   | 5720 48 | 5725 48   |                          | 2-way - double pole switch                                   |
| 10   | 5720 47 | 5725 47   |                          | 1-way - double pole switch with indicator Red LED supplied   |

\*Some Arteor™ products shown here may not be available in Australia and New Zealand. Please contact our sales office for international specifications requirements.

Arteor™ mechanical switches  
Round version

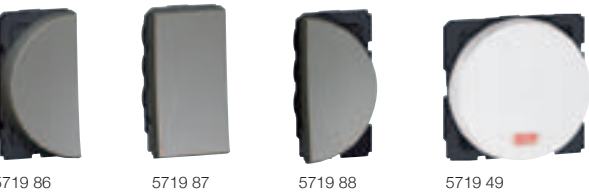

Support frames and plates selection chart (p. 234)

Mechanisms supplied with White or Magnesium round rocker plates  
To be equipped with support frames and plates (p. 258 - 263)

| Pack | Cat. No. |           | Switches 16 AX - 250 V~  |                                                                                   |
|------|----------|-----------|--------------------------|-----------------------------------------------------------------------------------|
|      | White    | Magnesium | Single module mechanisms |                                                                                   |
| 10   | 5719 36  | 5719 86   |                          | 2-way switch round left                                                           |
| 10   | 5719 37  | 5719 87   |                          | 2-way switch round middle                                                         |
| 10   | 5719 38  | 5719 88   |                          | 2-way switch round right                                                          |
| 10   | 5719 46  | 5719 96   |                          | 2-way switch with indicator left module (LED indicator supplied with mechanism)   |
| 10   | 5719 47  | 5719 97   |                          | 2-way switch with indicator middle module (LED indicator supplied with mechanism) |
| 10   | 5719 48  | 5719 98   |                          | 2-way switch with indicator right module (LED indicator supplied with mechanism)  |
|      |          |           | Two module mechanisms    |                                                                                   |
| 10   | 5719 39  | 5719 89   |                          | 2-way switch                                                                      |
| 10   | 5719 49  | 5719 99   |                          | 2-way switch with LED indicator (supplied with mechanism)                         |

|      | White   | Magnesium | Switches 20 AX - 250 V~ (continued) |                                                              |
|------|---------|-----------|-------------------------------------|--------------------------------------------------------------|
|      |         |           | Two module mechanisms               |                                                              |
|      |         |           | 2 modules 22.5 x 45 mm              |                                                              |
| 10   | 5730 70 | 5731 70   |                                     | 1-way switch                                                 |
| 5    | 5730 71 | 5731 71   |                                     | 2-way switch with indicator To be equipped with LED (p. 166) |
| 10 5 | 5730 73 | 5731 73   |                                     | 2 x 2-way switch + 1-way switch 3 gang                       |
| 10 5 | 5730 77 | 5731 77   |                                     | 2-way - double pole switch                                   |
| 10   | 5730 76 | 5731 76   |                                     | 1-way - double pole switch with indicator - Red LED supplied |


Arteor™ switches  
770 version



Mechanisms supplied with White or Magnesium 770 rocker plates To be equipped with Australian series of support frames and plates (p. 258 - 263)

| Pack | Cat. No.        |                  | Electronic push button switches                                                                                                              |
|------|-----------------|------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
|      | White           | Magnesium        |                                                                                                                                              |
| 10   | AR883MWE        | AR883MMGM        | 770 series switch mechanisms, 240V ~<br>5A electronic switch mechanism (neutral required at switch)                                          |
| 10   | AR770MWE        | AR770MMGN        |                                                                                                                                              |
| 10   | AR770/202MWE    | AR770/202MMGN    | Mechanical switch mechanisms<br>16A switch mechanism, 1-2 way & loop                                                                         |
| 10   | AR769P16MWE     | AR769P16MMGN     | 20A switch mechanism 1-2 way & loop                                                                                                          |
| 10   | AR770XMWE       | AR770XMMGN       | 16A double pole, single throw switch mechanism                                                                                               |
| 10   | AR770IMWE       | AR770IMMGN       | 16A spring return switch mechanism                                                                                                           |
| 10   | AR770/35MWE     | AR770/35MMGN     | 10A intermediate switch mechanism                                                                                                            |
| 10   | AR770/35MOVENWE | AR770/35MOVENMGN | 35A switch mechanism 1 way loop                                                                                                              |
|      |                 |                  | 35A switch mechanism 1 way loop marked oven                                                                                                  |
| 10   | AR870MWE        | AR870MMGN        | Single pole, mechanical push button switch, 240V a.c.<br>10A mechanical push button switch. Size: 24mm square x 25mm deep from back of plate |
| 10   | AR870IMWE       | AR870IMMGN       | 10A mechanical push button intermediate switch. Size: 24mm square x 25mm deep                                                                |
| 10   | AR770MFANWE     | AR770MFANMGN     | Printed switch mechanisms<br>16A switch mechanism, 1-2 way & loop - marked, fan                                                              |
| 10   | AR770MHEATWE    | AR770MHEATMGN    | 16A switch mechanism, 1-2 way & loop - marked, heat                                                                                          |
| 10   | AR770MLIGHTWE   | AR770MLIGHTMGN   | 16A switch mechanism, 1-2 way & loop - marked, light                                                                                         |
| 10   | AR770MWASTEWE   | AR770MWASTEMGN   | 16A switch mechanism, 1-2 way & loop - marked, waste                                                                                         |
| 10   | AR770MONOFFWE   | AR770MONOFFMGN   | 16A switch mechanism, 1-2 way & loop - marked, on off                                                                                        |
| 10   | AR770MZONE1WE   | AR770MZONE1MGN   | 16A switch mechanism, 1-2 way & loop - marked, zone 1                                                                                        |
| 10   | AR770MZONE2WE   | AR770MZONE2MGN   | 16A switch mechanism, 1-2 way & loop - marked, zone 2                                                                                        |
| 10   | AR770MZONE3WE   | AR770MZONE3MGN   | 16A switch mechanism, 1-2 way & loop - marked, zone 3                                                                                        |
| 10   | AR770MZONE4WE   | AR770MZONE4MGN   | 16A switch mechanism, 1-2 way & loop - marked, zone 4                                                                                        |

Arteor™ grid & mechanisms  
Grid only

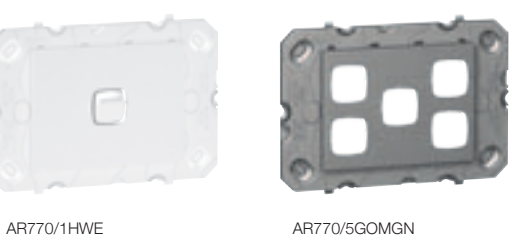

Plates selection chart (p. 234)  
Suitable mechanisms (p. 235, 242)

| Pack | Cat. No.    |              | Grid & mechanisms                                       |                                    |
|------|-------------|--------------|---------------------------------------------------------|------------------------------------|
|      | White       | Magnesium    | Grid complete with 16AX switch mechanism                |                                    |
| 10   | AR770/1HWE  | AR770/1HMGN  |                                                         | 1 gang horizontal switch           |
| 10   | AR770/1WE   | AR770/1MGN   |                                                         | 1 gang vertical switch             |
| 10   | AR770/2HWE  | AR770/2HMGN  |                                                         | 2 gang horizontal switch           |
| 10   | AR770/2WE   | AR770/2MGN   |                                                         | 2 gang vertical switch             |
| 10   | AR770/3HWE  | AR770/3HMGN  |                                                         | 3 gang horizontal switch           |
| 10   | AR770/3WE   | AR770/3MGN   |                                                         | 3 gang vertical switch             |
| 10   | AR770/4HWE  | AR770/4HMGN  |                                                         | 4 gang horizontal switch           |
| 10   | AR770/4WE   | AR770/4MGN   |                                                         | 4 gang vertical switch             |
| 10   | AR770/5HWE  | AR770/5HMGN  |                                                         | 5 gang horizontal switch           |
| 10   | AR770/5WE   | AR770/5MGN   |                                                         | 5 gang vertical switch             |
| 10   | AR770/6HWE  | AR770/6HMGN  |                                                         | 6 gang horizontal switch           |
| 10   | AR770/6WE   | AR770/6MGN   |                                                         | 6 gang vertical switch             |
|      |             |              | Grid only                                               |                                    |
|      |             |              | Grid ready to accept any 770 series of switch mechanism |                                    |
| 10   | AR770/1GOWE | AR770/1GOMGN |                                                         | 1 gang grid only without mechanism |
| 10   | AR770/2GOWE | AR770/2GOMGN |                                                         | 2 gang grid only without mechanism |
| 10   | AR770/3GOWE | AR770/3GOMGN |                                                         | 3 gang grid only without mechanism |
| 10   | AR770/4GOWE | AR770/4GOMGN |                                                         | 4 gang grid only without mechanism |
| 10   | AR770/5GOWE | AR770/5GOMGN |                                                         | 5 gang grid only without mechanism |
| 10   | AR770/6GOWE | AR770/6GOMGN |                                                         | 6 gang grid only without mechanism |

Arteor™ electronic switches  
Square version



Support frames and plates selection chart (p. 234)  
For load selection chart please contact HPM Legrand customer service

Mechanisms supplied with White or Magnesium square rocker plates  
To be equipped with support frames and plates (p. 258 - 263)

| Pack | Cat. No.         |                      | Micropush switches - 100/240 V~                                                        |
|------|------------------|----------------------|----------------------------------------------------------------------------------------|
|      |                  |                      | <b>With neutral</b>                                                                    |
| 1    | White<br>5740 03 | Magnesium<br>5740 53 | With Magnesium push control                                                            |
|      |                  |                      | 2-way switch<br>1000 W with LED locator<br>To be mounted on 3-module support frame     |
| 1    | 5740 00          | 5740 50              | 2-way switch<br>2 x 1000 W with LED locator<br>To be mounted on 3-module support frame |
| 1    | 5740 01          | 5740 51              | 2-way switch<br>3 x 1000 W with LED locator<br>To be mounted on 3-module support frame |

| Pack | Cat. No.         |                      | Sensitive switches - 100/240 V~                                                                                                                                                                                                 |
|------|------------------|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|      |                  |                      |                                                                                                                                                                                                                                 |
| 1    | White<br>5720 51 | Magnesium<br>5734 55 | For controlling light sources by simply passing the hand in front of the switch<br>Up to 5 sensitive switches can be combined to control the same lighting circuit<br>Supplied with LED indicator light<br>2 modules 45 x 45 mm |

Arteor™ electronic switches  
Round version



Support frames and plates selection chart (p. 234)  
For load selection chart please contact HPM Legrand customer service

Mechanisms supplied with White or Magnesium round rocker plates  
To be equipped with support frames and plates (p. 258 - 263)

| Pack | Cat. No.         |                      | Micropush switches - 100/240 V~                                                        |
|------|------------------|----------------------|----------------------------------------------------------------------------------------|
|      |                  |                      | <b>With neutral</b>                                                                    |
| 1    | White<br>5743 03 | Magnesium<br>5743 53 | With Magnesium circular push control                                                   |
|      |                  |                      | 2-way switch<br>1000 W with LED locator<br>To be mounted on 3-module support frame     |
| 1    | 5743 00          | 5743 50              | 2-way switch<br>2 x 1000 W with LED locator<br>To be mounted on 3-module support frame |
| 1    | 5743 01          | 5743 51              | 2-way switch<br>3 x 1000 W with LED locator<br>To be mounted on 3-module support frame |

| Pack | Cat. No.         |                      | Sensitive switches - 100/240 V~                                                                                                                                                                                                 |
|------|------------------|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|      |                  |                      |                                                                                                                                                                                                                                 |
| 1    | White<br>5725 51 | Magnesium<br>5736 55 | For controlling light sources by simply passing the hand in front of the switch<br>Up to 5 sensitive switches can be combined to control the same lighting circuit<br>Supplied with LED indicator light<br>2 modules 45 x 45 mm |

Arteor™ push buttons  
Square version



Support frames and plates selection chart (p. 234)  
For load selection chart please contact HPM Legrand customer service

Mechanisms supplied with White or Magnesium square rocker plates  
To be equipped with support frames (p. 258) and plates (p. 259 - 263)

| Pack | Cat. No. |           | Push-buttons 6 A - 250 V~                                |                                                                    |
|------|----------|-----------|----------------------------------------------------------|--------------------------------------------------------------------|
|      |          |           |                                                          |                                                                    |
|      | White    | Magnesium | <b>Single module mechanisms</b><br>1 module 22.5 x 45 mm |                                                                    |
| 10   | 5720 00  | 5725 00   |                                                          | 1-way push-button                                                  |
| 10 5 | 5720 01  | 5725 01   |                                                          | 2-way push-button                                                  |
| 10   | 5720 02  | 5725 02   |                                                          | 2-way push-button with locator<br>Equipped with blue LED           |
| 10 5 | 5720 03  | 5725 03   |                                                          | 2-way push-button with label-holder                                |
| 5    | 5720 15  | 5725 15   |                                                          | 1-way push-button with bell symbol                                 |
| 5    | 5720 16  | 5725 16   |                                                          | Push-button with locator and bell symbol<br>Equipped with blue LED |
|      |          |           | <b>Two module mechanisms</b><br>2 modules 45 x 45 mm     |                                                                    |
| 10   | 5720 30  | 5725 30   |                                                          | 1-way push-button                                                  |
| 10 5 | 5720 31  | 5725 31   |                                                          | 2-way push-button                                                  |
| 10 5 | 5720 32  | 5725 32   |                                                          | 2-way push-button with locator<br>Equipped with blue LED           |
| 10   | 5720 33  | 5725 33   |                                                          | 2-way push-button with label-holder                                |
| 5    | 5720 56  | 5725 56   |                                                          | 1-way push-button with bell symbol                                 |

Arteor™ push buttons  
Round version



Support frames and plates selection chart (p. 234)  
For load selection chart please contact HPM Legrand customer service

Mechanisms supplied with White or Magnesium round rocker plates  
To be equipped with support frames (p. 258) and plates (p. 258 - 263)

| Pack | Cat. No. |         | Push-buttons 6 A - 250 V~                                |                                                          |
|------|----------|---------|----------------------------------------------------------|----------------------------------------------------------|
|      |          |         |                                                          |                                                          |
|      |          |         | <b>Single module mechanisms</b><br>1 module 22.5 x 45 mm |                                                          |
| 10   | 5730 00  | 5731 00 |                                                          | 1-way push-button - left module                          |
| 10   | 5730 01  | 5731 01 |                                                          | 1-way push-button - middle module                        |
| 10   | 5730 02  | 5731 02 |                                                          | 1-way push-button - right module                         |
|      |          |         | <b>Two module mechanisms</b><br>2 modules 45 x 45 mm     |                                                          |
| 10   | 5730 50  | 5731 50 |                                                          | 1-way push-button                                        |
| 5    | 5730 51  | 5731 51 |                                                          | 2-way push-button                                        |
| 5    | 5730 52  | 5731 52 |                                                          | 2-way push-button with locator<br>Equipped with blue LED |
| 10 5 | 5730 53  | 5731 53 |                                                          | 2-way push-button with label-holder                      |
| 5    | 5730 80  | 5731 80 |                                                          | 1-way push-button with bell symbol                       |



Arteor™ automatic switches



5720 53 5740 62

Support frames and plates selection chart (p. 234)  
For load selection chart please contact HPM Legrand customer service

Mechanisms supplied with White or Magnesium square rocker plates  
To be equipped with support frames and plates (p. 258 - 263)

| Pack | Cat. No.                           | Automatic switches - 100/240 V~                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    | White 5720 53<br>Magnesium 5740 61 | <p>Movement IR detection<br/>Adjustable detection distance from 3 to 10 m<br/>Horizontal detection angle: 180°<br/>Adjustable luminosity threshold: 3 to 1000 lux<br/>Time delay adjustable from 1 s to 16 min<br/>Cycle repeated as long as movement is detected<br/>Possible remote manual control with N/C push-button<br/>Integrated self-protection against overloads and short-circuits<br/>Installation in box min. depth 40 mm recommended<br/>2 modules 45 x 45 mm</p> <p><b>With neutral, 3-wire - 1000 W</b></p> <p>Operates:<br/>- up to 1000 W incandescent and halogen lamps<br/>- up to 500 VA ELV halogen lamps with ferromagnetic or electronic transformer, fluorescent tubes and compact fluorescent lamps</p> <p><b>Without neutral, 2-wire - 400 W</b></p> <p>Operates:<br/>- up to 400 W incandescent and halogen lamps<br/>- up to 400 VA ELV halogen lamps with ferromagnetic or electronic transformer</p> |
| 1    | 5720 52 5740 62                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

Arteor™ dimmers  
770 version



AR400TMWE AR450PMMGN

Mechanisms supplied with White or Magnesium square rocker plates  
To be equipped with support frames (p. 239) and plates (p. 259 - 263)

| Pack | Cat. No.                                | Dimmers                                                                                                                          |
|------|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| 10   | White AR400LMWE<br>Magnesium AR400LMMGN | <b>770 series dimmer mechanisms, 240V ~</b><br>400VA leading edge dimmer mechanism                                               |
| 10   | AR400TMWE AR400TMMGN                    | 400VA trailing edge dimmer mechanism                                                                                             |
| 10   | AR450PMWE AR450PMMGN                    | 450VA universal push button dimmer mechanism                                                                                     |
| 10   | AR450SMWE AR450SMMGN                    | Secondary control mechanism (slave to be used with universal push button dimmer mechanism & AR883 electronic push button switch) |

| Load Type                                       | T Series (trailing edge) | L Series (leading edge) | Universal |
|-------------------------------------------------|--------------------------|-------------------------|-----------|
| Incandescent                                    | ✓                        | ✓                       | ✓         |
| 240V linear halogen                             | ✓                        | ✓                       | ✓         |
| Low voltage halogen with electronic transformer | ✓                        | ✗                       | ✓         |
| Low voltage halogen with wirewound transformer  | ✗                        | ✓                       | ✓         |
| GU10 240V halogen downlights                    | ✗                        | ✓                       | ✓         |

| Dimmer Capacity | T Series (trailing edge) | L Series (leading edge) |                            |        |                            |
|-----------------|--------------------------|-------------------------|----------------------------|--------|----------------------------|
|                 |                          | Normal                  | with wirewound transformer | Normal | with wirewound transformer |
| 400             | 400W                     | 400W                    | 320W                       | -      | -                          |
| 450             | -                        | -                       | -                          | 450W   | 270W                       |

Arteor™ lighting control  
Emergency push-buttons



5720 55 5723 63 5723 62

Support frames and plates selection chart (p. 234)

Mechanisms supplied with White or Magnesium square rocker plates  
To be equipped with support frames and plates (p. 258 - 263)

| Pack     | Cat. No.                                              | Time delay switches                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|----------|-------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1        | White 5720 55<br>Magnesium 5740 84                    | <p>Interference suppression conforming to standard EN 55022</p> <p>For timer control of a circuit with the following loads:<br/>- 1000 W incandescent and halogen 230 V~<br/>- 2300 W resistive (heating)<br/>- 400 VA fluorescent and ELV halogen<br/>Adjustable from 25 s to 15 min<br/>It is possible to install a number of timer switches in parallel on the same circuit<br/>2-wire installation in box min. depth 40 mm<br/>With integrated LED<br/>2 modules 45 x 45 mm</p> |
| 1        | White 5722 27<br>Magnesium 5727 27                    | <p><b>Single pole latching relays</b></p> <p>10 A - 250 V~ - 50/60 Hz<br/>With integrated push-button<br/>Intensity 0,04 A<br/>2 modules 45 x 45 mm</p>                                                                                                                                                                                                                                                                                                                             |
| 1        | White 5723 63                                         | <p><b>Emergency stop mushroom head push-buttons</b></p> <p><b>With key</b></p> <p>N/O + N/C<br/>10 A - 250 V~<br/>Unlock with RONIS key no. 601<br/>2 modules 45 x 45 mm</p>                                                                                                                                                                                                                                                                                                        |
| 1        | 5723 62                                               | <p><b>1/4 turn</b></p> <p>N/O + N/C<br/>10 A - 250 V~<br/>1/4 turn unlocking<br/>2 modules 45 x 45 mm</p>                                                                                                                                                                                                                                                                                                                                                                           |
| 10<br>10 | White 5722 32<br>Magnesium 5727 32<br>5722 33 5727 33 | <p><b>Key switches</b></p> <p>1 module 22.5 x 45 mm<br/>2-way<br/>Double pole</p>                                                                                                                                                                                                                                                                                                                                                                                                   |

Arteor™ visual indication



5727 26 5724 52 5724 53

Mechanisms supplied with White or Magnesium square rocker plates  
To be equipped with support frames and plates (p. 258 - 263)

| Pack                 | Cat. No.                                              | Miniature safety lighting unit                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------------------|-------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1                    | White 5722 22                                         | <p>Illuminates automatically upon power failure<br/>Unclips from frame to become portable<br/>Can be permanently attached to frame<br/>LEDs indicating mains and charging status</p>                                                                                                                                                                                                                                                                                      |
| 1<br>1               | White 5722 21<br>Magnesium 5740 82<br>5732 21 5741 82 | <p><b>Skirting lights</b></p> <p>2 modules 45 x 45 mm<br/>For installation close to obstacles</p> <p><b>Standard</b></p> <p>With LED 230 V - 0.2 or 1 W<br/>Square version</p> <p>Round version</p> <p><b>With motion detector 100-240 V</b></p> <p>With IR detection cell and LED<br/>When a person passes, the mechanism detects the presence and lights the obstacle<br/>The function is equipped with an audible signal that can be disengaged<br/>Square version</p> |
| 10                   | White 5724 52                                         | <p><b>Illuminated lighting unit</b></p> <p>230 V - 1 W<br/>Supplied with 4 coloured labels<br/>1 module 22.5 x 45 mm</p>                                                                                                                                                                                                                                                                                                                                                  |
| 10<br>10             | White 5724 53<br>5722 23                              | <p><b>Overdoor lighting units</b></p> <p>Supplied with diffusers and LED<br/>2 modules: 45 x 45 mm</p> <p>Red diffuser<br/>White diffuser</p>                                                                                                                                                                                                                                                                                                                             |
| 10<br>10<br>10<br>10 | 5724 56<br>5724 55<br>5724 57<br>5724 54              | <p><b>Lamps</b></p> <p>LED 230 V for locator switch - blue<br/>LED 230 V for indicator switch - red<br/>LED 24 V for indicator switch - red<br/>LED 12 V for indicator switch - red</p>                                                                                                                                                                                                                                                                                   |

Arteor™  
Ventilation and heating control



5722 18 5722 03

Support frames and plates selection chart (p. 234)

Mechanisms supplied with White or Magnesium square rocker plates  
To be equipped with support frames and plates (p. 258 - 263)

| Pack        | Cat. No.         |                      | Fan controller                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------|------------------|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1           | White<br>5722 17 | Magnesium<br>5727 17 | 2 modules 45 x 45 mm<br>AC speed control<br>4 positions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 1           | 5722 18          | 5727 18              | Rotary speed controller for fan<br>Operates 40 to 400 VA limit switch<br>For progressive speed control of<br>ceiling fan                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Thermostats |                  |                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 1           | White<br>5722 03 | Magnesium<br>5727 03 | 2 modules 45 x 45 mm<br><b>Electronic room thermostat</b><br>Control knob with index and<br>adjustable segments for min. and<br>max. settings<br>Adjustable range from 5 °C to 30 °C<br>(+/- 0.5 °C)<br>Power supply: 230 V~ - 50/60 Hz<br>One potential free changeover contact output<br>Suitable for controlling heated ceilings and<br>underfloor heating<br>- LV use breaking capacity:<br>8 A - 250 V~ - resistive inductive circuit<br>2 A - 250 V~ - inductive circuit<br>- ELV use breaking capacity:<br>12 to 48 V~ - 12 to 24 V=, from 1 mA min. to<br>500 mA max. |
| 1           | 5722 63          | 5727 63              | <b>Thermostat for electric floor heating</b><br>With one potential free N/O contact<br>and LED<br>16 A - 230 V~<br>Adjustable range from 10 °C<br>to 60 °C<br>With probe                                                                                                                                                                                                                                                                                                                                                                                                      |

Arteor™  
Roller blinds control and curtain switches



5722 19 5737 19 5727 20 5722 02

Mechanisms supplied with White or Magnesium square rocker plates  
To be equipped with support frames and plates (p. 258 - 263)

| Pack | Cat. No.                                                                                     |                                                                                                  | Electric roller blinds control - 250 V~                                                                                              |                               |
|------|----------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
|      | <br>White   | <br>Magnesium   | <b>Push-buttons</b><br>Double push-button - 6 A<br>For control via automatic box<br>(N/O mechanism)<br>2 modules 45 x 45 mm          |                               |
| 10   | 5722 19                                                                                      | 5727 19                                                                                          |                                                   | Square version                |
| 10   | 5732 19                                                                                      | 5737 19                                                                                          |                                                   | Round version                 |
|      |                                                                                              |                                                                                                  | <b>Switches</b><br>Double switch - 10 A<br>For direct control of a motor (mechanism<br>with fixed positions)<br>2 modules 45 x 45 mm |                               |
| 10   | 5722 20                                                                                      | 5727 20                                                                                          |                                                 | Square version                |
| 10   | 5732 20                                                                                      | 5737 20                                                                                          |                                                 | Round version                 |
|      |                                                                                              |                                                                                                  | <b>Curtain switches</b><br>1 module 22.5 x 45 mm                                                                                     |                               |
| 5    | <br>White | <br>Magnesium |                                                 | Curtain switch centre off     |
| 5    | 5722 01                                                                                      | 5727 01                                                                                          |                                                 | Curtain switch centre retract |

Arteor™  
Hotel equipment – square version  
Lighting, electric roller blinds and curtain control



5732 84 5733 82 5737 22 5732 34

Support frames and plates selection chart (p. 234)

Mechanisms supplied with White or Magnesium square rocker plates  
To be equipped with support frames and plates (p. 258 - 263)

| Pack | Cat. No.         |                      | Lighting control with specific marking                                                                                                                                                                                 |
|------|------------------|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10   | White<br>5732 84 | Magnesium<br>5737 84 | <b>Master controls</b><br>Master switch<br>2-way double pole<br>20 AX - 250 V~ for general control: all<br>ON / all OFF<br>2 modules 45 x 45 mm                                                                        |
| 10   | 5732 86          | 5737 86              | Master push-button<br>2-way - 6 A - 250 V~ for general<br>control: all ON/ all OFF<br>2 modules 45 x 45 mm                                                                                                             |
| 10   | 5732 94          | 5737 94              | <b>Controls for bed lights</b><br>2 x 2-way switch<br>10 AX - 250 V~<br>2 x 1 module 22.5 x 45 mm                                                                                                                      |
| 10   | 5732 96          | 5737 96              | 2 x 2-way push button<br>6 A - 250 V~<br>2 x 1 module 22.5 x 45 mm                                                                                                                                                     |
| 10   | 5733 82          | 5738 82              | <b>Controls for desk and entrance lights</b><br>2 x 2-way switch<br>10 AX - 250 V~<br>2 x 1 module 22.5 x 45 mm                                                                                                        |
| 10   | 5733 84          | 5738 84              | 2 x 2-way push button<br>6 A - 250 V~<br>2 x 1 module 22.5 x 45 mm                                                                                                                                                     |
| 10   | White<br>5732 22 | Magnesium<br>5737 22 | <b>Electric roller blinds control with<br/>specific marking - 250 V~</b><br>Double switch - 10 A<br>For direct control of a motor<br>(mechanism with fixed positions)<br>Roller blinds marking<br>2 modules 45 x 45 mm |
| 10   | 5732 24          | 5737 24              | Double push-button - 6 A<br>For control via automatic box (N/O<br>mechanism)<br>Roller blinds marking<br>2 modules 45 x 45 mm                                                                                          |

|    |                  |                      |                                                                                                                                                                                                   |
|----|------------------|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10 | White<br>5732 34 | Magnesium<br>5737 34 | <b>Curtain control with specific<br/>marking - 250 V~</b><br>Double switch - 10 A<br>For direct control of a motor<br>(mechanism with fixed positions)<br>Curtain marking<br>2 modules 45 x 45 mm |
| 10 | 5732 36          | 5737 36              | Double push-button - 6 A<br>For control via automatic box (N/O<br>mechanism)<br>Curtain marking<br>2 modules 45 x 45mm                                                                            |

Arteor™  
Hotel equipment – round version  
Lighting, electric roller blinds and curtain control



5737 85 5732 95 5737 35

Mechanisms supplied with White or Magnesium square rocker plates  
To be equipped with support frames and plates (p. 234)

| Pack | Cat. No.         |                      | Lighting control with specific marking                                                                                                                                                                                 |
|------|------------------|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10   | White<br>5732 85 | Magnesium<br>5737 85 | <b>Master controls</b><br>Master switch<br>2-way double pole<br>20 AX - 250 V~ for general control: all<br>ON / all OFF<br>2 modules 45 x 45 mm                                                                        |
| 10   | 5732 87          | 5737 87              | Master push-button<br>2-way - 6 A - 250 V~ for general<br>control: all ON/ all OFF<br>2 modules 45 x 45 mm                                                                                                             |
| 10   | 5732 95          | 5737 95              | <b>Controls for bed lights</b><br>2 x 2-way switch<br>10 AX - 250 V~<br>2 x 1 module 22.5 x 45 mm                                                                                                                      |
| 10   | 5732 97          | 5737 97              | 2 x 2-way push button<br>6 A - 250 V~<br>2 x 1 module 22.5 x 45 mm                                                                                                                                                     |
| 10   | 5733 83          | 5738 83              | <b>Controls for desk and entrance lights</b><br>2 x 2-way switch<br>10 AX - 250 V~<br>2 x 1 module 22.5 x 45 mm                                                                                                        |
| 10   | 5733 85          | 5738 85              | 2 x 2-way push button<br>6 A - 250 V~<br>2 x 1 module 22.5 x 45 mm                                                                                                                                                     |
| 10   | White<br>5732 23 | Magnesium<br>5737 23 | <b>Electric roller blinds control with<br/>specific marking - 250 V~</b><br>Double switch - 10 A<br>For direct control of a motor<br>(mechanism with fixed positions)<br>Roller blinds marking<br>2 modules 45 x 45 mm |
| 10   | 5732 25          | 5737 25              | Double push-button - 6 A<br>For control via automatic box (N/O<br>mechanism)<br>Roller blinds marking<br>2 modules 45 x 45 mm                                                                                          |

|    |                  |                      |                                                                                                                                                                                                   |
|----|------------------|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10 | White<br>5732 35 | Magnesium<br>5737 35 | <b>Curtain control with specific<br/>marking - 250 V~</b><br>Double switch - 10 A<br>For direct control of a motor<br>(mechanism with fixed positions)<br>Curtain marking<br>2 modules 45 x 45 mm |
| 10 | 5732 37          | 5737 37              | Double push-button - 6 A<br>For control via automatic box (N/O<br>mechanism)<br>Curtain marking<br>2 modules 45 x 45mm                                                                            |

Arteor™ hotel equipment  
BUS and Radio scenario controllers



5745 87



5745 91

Support frames and plates selection chart (p.234)

| Pack | Cat. No.                                                                            |                                                                                     | Scenario controllers with specific marking                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                |
|------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|      |    |    | <b>Radio controls</b><br>4-scenes micropush control<br>Surface mounting, no wiring needed<br>For BUS or radio installations<br>Mechanisms equipped with White or Black round cover plate and Magnesium circular push control for 4 scenarios<br>Supplied with support frames and batteries<br>To be equipped with plates (p. 85 to 93)<br>2 modules 45 x 45 mm |                                                                                                                                                                                                                |
| 1    | 5740 87                                                                             | 5745 87                                                                             |                                                                                                                                                                                                                                                                              | "wake up / sleep / TV / relax" marking                                                                                                                                                                         |
| 1    | 5740 88                                                                             | 5745 88                                                                             |                                                                                                                                                                                                                                                                                                                                                                | "wake up / sleep / open curtains / close curtains" marking                                                                                                                                                     |
|      |  |  | <b>Touch plates for radio controls</b><br>4-scenes touch plate<br>British standard fixing centres                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                |
| 1    | 5740 90                                                                             | 5745 90                                                                             |                                                                                                                                                                                                                                                                             | "wake up / sleep / TV / relax" marking<br>Can replace standard rocker plates and plates on 4-scenes radio controllers Cat. No. 5740 87, 5745 87                                                                |
| 1    | 5740 93                                                                             | 5745 93                                                                             |                                                                                                                                                                                                                                                                             | "wake up / sleep / open curtains / close curtains" marking<br>Can replace standard rocker plate and plates on 4-scenes radio controllers Cat. No. 5740 88, 5745 88                                             |
| 1    | 5740 89                                                                             | 5745 89                                                                             |                                                                                                                                                                                                                                                                                                                                                                | <b>BUS controls</b><br>4-scenes touch control for the activation of 4 scenarios:<br>"wake up / sleep / TV / relax"<br>2 modules mechanisms<br>For British standard flush-mounting boxes                        |
| 1    | 5740 91                                                                             | 5745 91                                                                             |                                                                                                                                                                                                                                                                             | 6-scenes touch control for the activation of 6 scenarios:<br>"wake up / sleep / TV / relax / open curtains / close curtains"<br>3 modules mechanisms<br>For British, Italian and American flush-mounting boxes |

| <b>Accessories</b> |         |                                                                          |
|--------------------|---------|--------------------------------------------------------------------------|
| 10                 | 5740 92 | Sheet with stickers with symbols for different scenarios for hotel rooms |
| 10                 | 5745 92 | Dark colour<br>White colour                                              |

Arteor™ hotel equipment  
Key fob switches, shaver sockets



5727 30



5721 53

Support frames and plates selection chart (p.234)

Mechanisms supplied with White or Magnesium square cover plates  
To be equipped with support frames and plates (p. 258 - 263)

| Pack | Cat. No.                                                                            |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|      |  |  | <b>Key fob switches</b><br><br>For energizing a circuit by inserting a key fob<br>Cat. No. 5722 59 and 5727 59 or a smart<br>card (access card for a hotel room)<br>Example of use: hotel room power supply<br>only when guest is present<br>Time-delay of approx. 30 sec. after card<br>removal<br><br>To be equipped with single pole latching relay<br>Cat. No. 5722 27 and 5727 27<br>2 modules 45 x 45 mm<br><br> Key fob switch 230 V<br> Key fob switch 12-24 V          |
| 1    | 5722 30                                                                             | 5727 30                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 1    | 5722 31                                                                             | 5734 93                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|      |  |  | <b>Key fob</b><br><br> Key fob<br>Enables use of key fob switches<br>in hotels with key locks<br>Supplied complete with a label holder<br>for individual hotel identification                                                                                                                                                                                                                                                                                                                                                                                        |
| 10   | 5722 59                                                                             | 5727 59                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|      |                                                                                     |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|      |  |  | <b>Shaver sockets</b><br><br>Conform to BS EN 61558-2-5. IP 24<br>For use with European, British, American,<br>Australian 2-pin plugs<br>Screwless live and neutral terminals<br>Double wound isolating transformer<br>Automatic self-resetting overload feature<br>Plug insertion operates micro-switch which<br>energises transformer<br><br>To be equipped with special plate<br>Cat. No. 5750 70 (white plate). Contact<br>customer service for project quantities of<br>other plate types.<br><br>50/60 Hz<br>230 V / 120-230 V<br>with earth connector<br><br> |
| 1    | 5721 53                                                                             | 5726 53                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|      |                                                                                     |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |


Arteor™ hotel equipment  
Square version call indicators, illuminated signs, buzzers



5720 57



5725 54



5722 24

Support frames and plates selection chart (p. 234)  
For load selection chart please contact HPM Legrand customer service

Mechanisms supplied with White or Magnesium square rocker plates  
To be equipped with support frames and plates (p. 258 - 263)

| Pack | Cat. No.                                                                            |                                                                                     | Hotel bedroom call indicators                                                                                                                                                                                                             |                                                                                                                                      |
|------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
|      |  |  | <p>Enables the resident to inform hotel staff of the room status</p> <p>Two settings are possible:</p> <ul style="list-style-type: none"><li>- Do not disturb</li><li>- Please clean the room</li></ul> <p>1 + 1 modules 22.5 x 45 mm</p> |                                                                                                                                      |
| 5    | White<br>5720 57                                                                    | Magnesium<br>5725 57                                                                |                                                                                                                                                                                                                                           |                                                                                                                                      |
|      |  |  |                                                                                                                                                        | <p><b>Indicator</b></p> <p>Indicator lamp and bell push</p> <p>Installed in the corridor, display calls</p> <p>Supplied with LED</p> |
| 5    | 5720 54                                                                             | 5725 54                                                                             |                                                                                                                                                       | <p><b>Internal control unit</b></p> <p>Allows the user to select the desired setting</p> <p>Supplied with LED</p>                    |

|   |                                                                                       | <b>Illuminated signs</b>                                                                                                                                                     |  |
|---|---------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|   |                                                                                       | Mechanisms integrating LEDs and a pivoting window that can take customised labels (printed using a simple text editor on transparent printing paper)<br>2 modules 45 x 45 mm |  |
|   |  |                                                                                         |  |
|   | White                                                                                 | Magnesium                                                                                                                                                                    |  |
| 5 | 5722 24                                                                               | 5727 24                                                                                                                                                                      |  |
|   |                                                                                       | <b>Green or Red</b>                                                                                                                                                          |  |
|   |                                                                                       |                                                                                         |  |
|   |                                                                                       | Sign with 2-state LEDs with choice of green or red configurable on the mechanism<br>1 W                                                                                      |  |
|   |                                                                                       | <b>Blue</b>                                                                                                                                                                  |  |
|   |                                                                                       |                                                                                         |  |
|   |                                                                                       | Sign with blue LEDs<br>A choice of 2 power levels:<br>0.2 or 1 W                                                                                                             |  |
| 5 | 5722 25                                                                               | 5727 22                                                                                                                                                                      |  |

|      |                                                                                       |                                                                                       |                                                                                       | Buzzers                        |
|------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|--------------------------------|
|      |  |  |                                                                                       |                                |
|      | White                                                                                 | Magnesium                                                                             | <b>230 V</b>                                                                          |                                |
| 10 5 | 5722 04                                                                               | 5727 04                                                                               |  | 230 V<br>1 module 22.5 x 45 mm |
| 10   | 5722 07                                                                               | 5722 47                                                                               |  | 230 V<br>2 modules 45 x 45 mm  |

Arteor™ hotel equipment  
Round version call indicators, illuminated signs, buzzers



5725 67



5725 74

Support frames and plates selection chart (p. 234)  
For load selection chart please contact HPM Legrand customer service

Mechanisms supplied with White or Magnesium square rocker plates  
To be equipped with support frames and plates (p. 258 - 263)

| Pack | Cat. No.                                                                            |                                                                                     | Hotel bedroom call indicators                                                                                                                                                                         |
|------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|      |  |  | Enables the resident to inform hotel staff of the room status<br>Two settings are possible:<br>- Do not disturb<br>- Please clean the room<br>1 + 1 modules 22.5 x 45 mm                              |
| 5    | White<br>5720 67                                                                    | Magnesium<br>5725 67                                                                | <b>Indicator</b><br> Indicator lamp and bell push<br>Installed in the corridor, display calls<br>Supplied with LED |
| 5    | 5720 74                                                                             | 5725 74                                                                             | <b>Internal control unit</b><br> Allows the user to select the desired setting<br>Supplied with LED               |

|   |                                                                                       | <b>Illuminated signs</b>                                                                                                                                                     |
|---|---------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|   |  | Mechanisms integrating LEDs and a pivoting window that can take customised labels (printed using a simple text editor on transparent printing paper)<br>2 modules 45 x 45 mm |
| 5 | Magnesium<br>5727 25                                                                  | <b>Green or Red</b><br>Sign with 2-state LEDs with choice of green or red configurable on the mechanism<br>1 W                                                               |
| 5 | 5727 23                                                                               | <b>Blue</b><br>Sign with blue LEDs<br>A choice of 2 power levels:<br>0.2 or 1 W                                                                                              |

|    |                                                                                       | <b>Buzzers</b>                                                                        |                                                                                                                                        |
|----|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
|    |  |  | <b>230 V</b><br><br>230 V<br>2 modules 45 x 45 mm |
| 10 | White<br>5722 08                                                                      | Magnesium<br>5722 48                                                                  |                                                                                                                                        |



Arteor™ hotel equipment  
Square version data, audio and video sockets



Support frames and plates selection chart (p. 234)  
For load selection chart please contact HPM Legrand customer service

Mechanisms supplied with White or Magnesium square rocker plates  
To be equipped with support frames and plates (p. 258 - 263)

| Pack | Cat. No.                 |                              | Data, audio and video sockets                                                                                                                                                                                                                                                                                                                                   |
|------|--------------------------|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10   | <div>White</div> 5723 14 | <div>Magnesium</div> 5728 14 | <b>RJ 45 tool-less system - Cat. 6</b><br> Rapid connection socket no tool required<br>UTP - 8 contacts<br>2 modules 45 x 45 mm                                                                                                                                                |
| 1    | 5722 75                  | 5727 75                      | <b>USB sockets</b><br> Used to bring connections closer to the user<br>For connecting USB devices (scanner-printer, external hard disk)<br>Connection via screw terminals cross-section 1 mm²<br>Recommended cable: USB A max. cable length 5 m<br>1 module 22.5 x 45 mm       |
| 1    | 5722 72                  | 5727 72                      | <b>2 x female RCA</b><br> For the stereo audio connection of any DVD drive, camera, video recorder, etc. type peripheral<br>Recommended cable: 1 shielded audio pair 1 module 22.5 x 45 mm                                                                                   |
| 1    | 5722 73                  | 5727 73                      | <b>3 x female RCA</b><br> For the composite video and stereo audio connection of a DVD drive, camera, video recorder, video conference equipment etc.<br>Recommended cable: 1 shielded audio pair + 1 x 3 mm mini-coaxial<br>1 module 22.5 x 45 mm                           |
| 1    | 5722 71                  | 5727 71                      | <b>YUV</b><br> For analog high definition connection of a DVD, PC monitor, plasma screen, video projector, graphic paintbox, etc.<br>Recommended cable: 3 x 3 mm mini-coaxial (max. cable length 25 m) or 3 x RG59 coaxial (max. cable length 50 m)<br>1 module 22.5 x 45 mm |
| 1    | 5722 74                  | 5727 74                      | <b>Female 3.5 mm jack</b><br>For stereo audio connection from a portable source<br>Recommended cable: 1 x 0.22 mm² shielded audio pair<br> Connection on screw terminals<br>1 module 22.5 x 45 mm                                                                            |

| Pack | Cat. No.                 |                              | Audio and video sockets (continued)                                                                                                                                                                                                                                                                                                                                                     |
|------|--------------------------|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    | <div>White</div> 5722 82 | <div>Magnesium</div> 5727 82 | <b>Female HD 15</b><br>For VGA, XGA or VESA connection of a PC monitor, plasma screen, video projector, graphic paintbox, etc.<br>Recommended cable Cat. No. 327 81<br>Max. cable length 25 m (beyond this a VGA amplifier is recommended)<br> Connection on screw terminals<br>2 modules 45 x 45 mm |
| 1    | 5722 81                  | 5727 81                      | <b>HDMI</b><br> For digital high definition audio and video connection of a PC monitor, plasma screen, video projector, graphic paintbox, etc.<br>Recommended cable Cat. No. 327 80<br>2 modules 45 x 45 mm                                                                                         |
| 1    | <div>White</div> 5722 88 | <div>Magnesium</div> 5727 88 | <b>Female HD 15 + jack 3.5 mm</b><br>2 modules 45 x 45 mm<br> Square version                                                                                                                                                                                                                       |

Arteor™ hotel equipment  
Round version data, audio and video sockets



Support frames and plates selection chart (p. 234)

Mechanisms supplied with White or Magnesium square rocker plates  
To be equipped with support frames and plates (p. 258 - 263)

| Pack | Cat. No.                 |                              | Data, audio and video sockets                                                                                                                                                                                                                                                                                                                              |
|------|--------------------------|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10   | <div>White</div> 5723 24 | <div>Magnesium</div> 5728 24 | <b>RJ 45 tool-less system - Cat. 6</b><br>Rapid connection socket, no tool required<br>UTP - 8 contacts<br>2 modules 45 x 45 mm                                                                                                                                                                                                                            |
| 1    | 5732 74                  | 5737 74                      | <b>USB sockets</b><br> Used to bring connections closer to the user<br>For connecting USB devices (scanner-printer, external hard disk)<br>Connection via screw terminals cross-section 1 mm²<br>Recommended cable: USB A max. cable length 5 m<br>2 modules 45 x 45 mm |
| 1    | 5732 72                  | 5737 72                      | <b>2 x female RCA</b><br> For the stereo audio connection of any DVD drive, camera, video recorder, etc. type peripheral<br>Recommended cable: 1 shielded audio pair<br>2 modules 45 x 45 mm                                                                          |
| 1    | 5732 73                  | 5737 73                      | <b>3 x female RCA</b><br> For the composite video and stereo audio connection of a DVD drive, camera, video recorder, video conference equipment etc.<br>Recommended cable: 1 shielded audio pair + 1 x 3 mm mini-coaxial<br>2 modules 45 x 45 mm                     |

| Pack | Cat. No.                 |                              | Audio and video sockets (continued)                                                                                                                                                                                                                                                      |
|------|--------------------------|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    | <div>White</div> 5722 85 | <div>Magnesium</div> 5727 85 | <b>HDMI</b><br>For digital high definition audio and video connection of a PC monitor, plasma screen, video projector, graphic paintbox, etc.<br>Recommended cable Cat. No. 327 80<br>2 modules 45 x 45 mm                                                                               |
| 1    | 5745 01                  | 5745 51                      | <b>S-Video socket (4-pin mini-DIN)</b><br> 1-gang<br>Provides the YC video link for any peripheral device such as a DVD drive, camera, video recorder, videoconferencing, etc<br>2 modules 45 x 45 mm |
| 1    | <div>White</div> 5722 89 | <div>Magnesium</div> 5727 89 | <b>Female HD 15 + jack 3.5 mm</b><br>2 modules 45 x 45 mm                                                                                                                                                                                                                                |



Arteor™ access control




Mechanisms supplied complete with White or Magnesium square cover plate, flush-mounting box, support frame and plate

| Pack | Cat. No.                        |                                     | Readers                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------|---------------------------------|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    | White<br>5722 50 <sup>(1)</sup> | Magnesium<br>5727 50 <sup>(2)</sup> | 5 vertical modules 22.5 x 45 mm<br>IP 40 - IK 04<br>Power supply: 12 V <sub>-</sub><br>Equipped with 2 LEDs red/green and 1 buzzer. Can be used in stand-alone mode or with door controller (Cat. No. 767 04, or other control panel using Wiegand protocol)<br>Permanent backup memory                                                                                                                                                                     |
| 1    | 5722 51 <sup>(1)</sup>          | 5727 51 <sup>(2)</sup>              | <b>Fingerprint reader</b><br>12 V <sub>-</sub> - 145 mA<br>999 users in stand-alone mode or with Legrand door controller Cat. No. 767 04<br>1 door potential free changeover contact (1 A - 12 V) adjustable from 1 sec to 255 sec<br>1 push-button potential free input<br>Built-in back-lighted LCD for clear instruction display                                                                                                                         |
| 1    | 5722 51 <sup>(1)</sup>          | 5727 51 <sup>(2)</sup>              | <b>Card reader</b><br>12 V <sub>-</sub> - 118 mA<br>500 users in stand-alone mode<br>10000 users with Legrand door controller 767 04<br>1 door potential free changeover contact (1 A - 12 V) adjustable from 1 sec to 255 sec<br>1 push-button potential free contact. Built-in Wiegand protocol interface. Supplied with a master card, used to enrol a user or to communicate between the reader and the optional encoder Cat. No. 767 05 in stand-alone |
| 1    | 5722 52 <sup>(1)</sup>          | 5727 52 <sup>(2)</sup>              | <b>Coded keypad reader</b><br>12 V <sub>-</sub> - 47 mA<br>99 users in stand-alone mode<br>10000 users with door controller Cat. No. 767 04<br>1 door potential free changeover contact (1 A - 12 V) adjustable from 1 sec to 255 sec<br>1 push-button potential free contact<br>Built-in Wiegand protocol interface                                                                                                                                        |
| 5    | 767 10                          |                                     | <b>Badges for card reader</b><br>Contactless keyfob badge (13.56 Mhz Mifare)<br>Possibility to personalise the label                                                                                                                                                                                                                                                                                                                                        |
| 10   | 767 11                          |                                     | ISO contactless card (13.56 Mhz Mifare)<br>Dimensions: 50 x 80 mm                                                                                                                                                                                                                                                                                                                                                                                           |


(1) Supplied with White plate  
(2) Supplied with Mirror Black plate

Arteor™ access control


■ Installation principle in stand alone mode

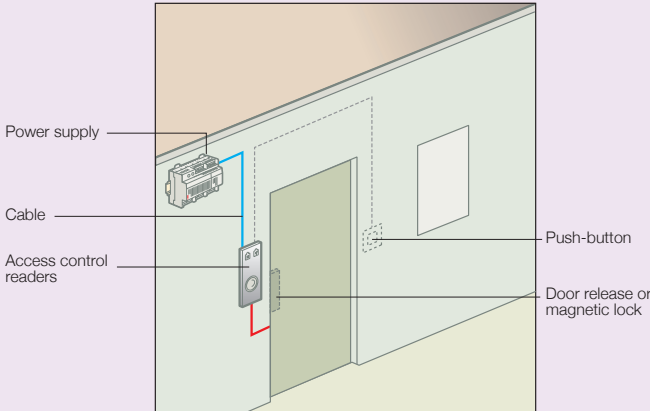

■ Stand-alone

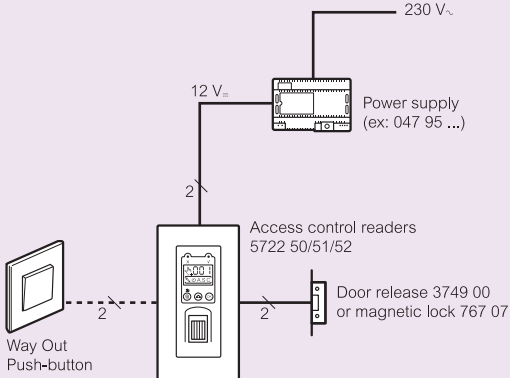

■ Centralized

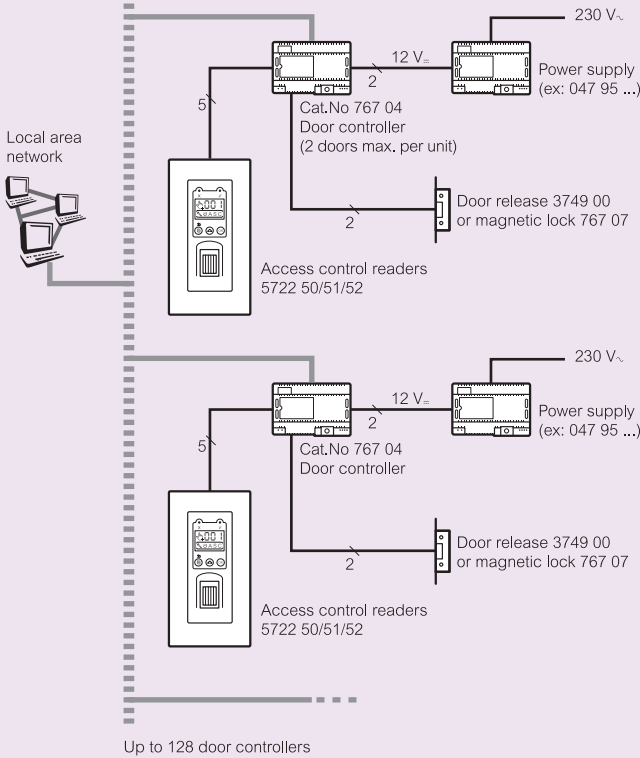

Note: for Cat No.s 047 95, 3749 00 please consult the Legrand general catalogue


Arteor™ RCBO, MCB



Support frames and plates selection chart (p. 234)

| Pack | Cat. No.         | RCBO                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|------|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    | White<br>5723 60 | Single pole + Neutral - 30 mA<br>16 A - 230<br>The RCBO is used to protect people (premises with a conductive floor, presence of water, etc...) against direct contact with live parts or leakages to earth<br>With test button<br>2 modules 45 x 45 mm                                                                                                                                                                                                                                                                       |
| 1    | White<br>5723 61 | <b>Thermal magnetic proximity MCB</b><br>Single pole + Neutral - 230 V <sub>-</sub><br>16 A<br>Used for local protection of part in a circuit (e.g. 2P+E socket) against overloads and short-circuits<br>Used in addition to the main protection as it is both close to the user and discriminating vis-à-vis the main protection, and can therefore be reset immediately<br>The proximity MCB can also be used as a local consumption limiter (depending on its rating)<br>Breaking capacity: 3000 A<br>2 modules 45 x 45 mm |

Arteor™ socket outlets

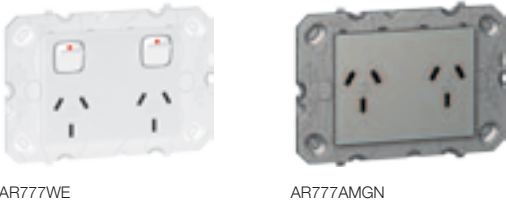

Support frames and plates selection chart (p. 234)

Mechanisms supplied with White or Magnesium square rocker plates  
To be equipped with support frames and plates (p. 258 - 263)

| Pack | Cat. No.          |                        | Socket Outlet 240 V <sub>~</sub>                                                    |
|------|-------------------|------------------------|-------------------------------------------------------------------------------------|
| 10   | White<br>AR777AWE | Magnesium<br>AR777AMGN | 10A double autoswitched socket outlet (integrated support frame)                    |
| 10   | AR777WE           | AR777MGN               | 10A double switched socket outlet (integrated support frame)                        |
| 10   | AR777XWE          | AR777XMGN              | 10A double switched socket outlet with additional switch (integrated support frame) |
| 10   | AR787/15AMWE      | AR787/15AMMGN          | 15A single autoswitched socket outlet (2 module)                                    |
| 10   | AR787AMWE         | AR787AMMGN             | 10A single autoswitched socket outlet (2 module)                                    |
| 10   | AR787ARMWE        | AR787ARMMGN            | 10A single autoswitched socket round earth (2 module)                               |
| 10   | AR787WE           | AR787MGN               | 10A single switched socket outlet (3 module)                                        |

Arteor™  
Television sockets



5719 07

Support frames and plates selection chart (p. 234)

Mechanisms supplied with White or Magnesium square rocker plates  
To be equipped with support frames and plates (p. 258 - 263)

| Pack | Cat. No. |         | Television sockets                                                                                                                                                    |
|------|----------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10   |          |         | 75 ohm "F" connector for cable and pay TV (Foxtel recognised)<br><b>TV sockets</b><br>75 ohm "F" connector for cable and pay TV<br>0-2.4 GHz<br>1 module 22.5 x 45 mm |
|      | 5719 07  | 5719 57 |                                                                                                                                                                       |

| Television sockets |                                                                                                                                                                                                                                                                                 |                                                                                     |                                                                                                                                                                    |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                    | <p>International series<br/>aerial and satellite installation (with individual demodulator)<br/>DTT and HDTV compatible<br/>TV: male connector (Ø 9.5 mm)<br/>attenuation ≤ 1.5 db<br/>SAT: "F" type connector attenuation ≤ 2 db<br/>Recommended coaxial cable: 17/19 VATC</p> |                                                                                     |                                                                                                                                                                    |
|                    |                                                                                                                                                                                              |  |                                                                                                                                                                    |
|                    | White                                                                                                                                                                                                                                                                           | Magnesium                                                                           | <b>TV sockets</b>                                                                                                                                                  |
| 10                 | 5721 63                                                                                                                                                                                                                                                                         | 5726 63                                                                             |  TV single shielded "F" type with screws<br>0-2400 MHz<br>1 module 22.5 x 45 mm |
| 10                 | 5721 71                                                                                                                                                                                                                                                                         | 5726 71                                                                             |  TV single shielded male Ø 9.5 mm<br>0-2400 MHz<br>1 module 22.5 x 45 mm        |

Arteor™  
Telephone sockets



5723 00



5728 13

Support frames and plates selection chart (p. 234)

Mechanisms supplied with White or Magnesium square rocker plates  
To be equipped with support frames and plates (p. 258 - 263)

| Pack | Cat. No. |         | RJ 11 and RJ 12 sockets                                                                                                                                                                         |
|------|----------|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10   |          |         | Equipped with modular Jack connector with 1/4 turn terminal for fast connection (possible looping)<br><b>RJ 11</b><br>4 contacts<br>1 module 22.5 x 45 mm<br>4 contacts<br>2 modules 45 x 45 mm |
|      | 5723 00  | 5728 00 |                                                                                                                                                                                                 |
| 10   | 5723 13  | 5728 13 | <b>RJ 12</b><br>6 contacts<br>2 modules 45 x 45 mm                                                                                                                                              |
| 10   | 5723 12  | 5728 12 |                                                                                                                                                                                                 |

| Telephone sockets |                                                                                     |                                                                                     |                                                                                                                                    |
|-------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
|                   |  |  | With IDC connection<br>Conform to British Telecom                                                                                  |
| 10                | White<br>5723 10                                                                    | Magnesium<br>5728 10                                                                | <br>Single master<br>2 modules 45 x 45 mm     |
| 5                 | 5723 01                                                                             | 5728 01                                                                             | <br>Single secondary<br>1 module 22.5 x 45 mm |

Arteor™  
Cat. 6 and Cat. 5e data sockets



5723 06



5728 02



5723 15

Support frames and plates selection chart (p. 234)

Mechanisms supplied with White or Magnesium square rocker plates  
To be equipped with support frames and plates (p. 258 - 263)  
Certified as conforming to standards ISO 11801 ed. 2.0, EN 50173-1 and EIA/TIA 568  
Contacts marked with 568 A and B dual colour code and numbers  
Connectors with self-stripping terminals  
Possibility of re-wiring in the event of error  
Multidirectionnal cable entry

| Pack | Cat. No. |         | RJ 45 - tool-less system                                                                                 |
|------|----------|---------|----------------------------------------------------------------------------------------------------------|
| 10   |          |         | Rapid connection sockets, no tool required<br><b>Cat. 6</b><br>UTP - 8 contacts<br>1 module 22.5 x 45 mm |
|      | 5723 02  | 5728 02 |                                                                                                          |
| 10   | 5723 14  | 5728 14 | UTP - 8 contacts<br>2 modules 45 x 45 mm<br>Square version                                               |
| 10   | 5723 24  | 5728 24 | UTP - 8 contacts<br>2 modules 45 x 45 mm<br>Round version                                                |
| 10   | 5723 03  | 5728 03 | <b>Cat. 5e</b><br>UTP - 8 contacts<br>1 module 22.5 x 45 mm                                              |
| 10   | 5723 15  | 5728 15 |                                                                                                          |

Arteor™  
Rear pluggable data sockets and wiring splitter



5723 31



5728 32



5728 35

Support frames and plates selection chart (p. 234)

Mechanisms supplied with White or Magnesium square rocker plates  
To be equipped with support frames and plates (p. 258 - 263)  
Certified as conforming to standards ISO 11801 ed. 2.0, EN 50173-1 and EIA/TIA 568  
Contacts marked with 568 A and B dual colour code and numbers  
Connectors with self-stripping terminals  
Possibility of re-wiring in the event of error  
Multidirectionnal cable entry

| Pack                               | Cat. No. |         | Rear pluggable RJ 45 sockets                                                                                                                                                                                                                                                                                                       |
|------------------------------------|----------|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10                                 |          |         | For use with area distribution boxes, connection to boxes via RJ 45-RJ 45 dedicated cords<br>Used to create Cat. 6 and Cat. 5e links in accordance with standards<br>2 modules 45 x 45 mm<br><b>Cat. 6</b><br>UTP<br><b>Cat. 5e</b><br>UTP                                                                                         |
|                                    | 5723 31  | 5728 31 |                                                                                                                                                                                                                                                                                                                                    |
| 10                                 | 5723 30  | 5728 30 |                                                                                                                                                                                                                                                                                                                                    |
| Telephone/Ethernet wiring splitter |          |         | Provide increased security against theft and damage to double connectors<br>Provide a rate of 10/100 Mbps<br>Multidirectionnal cable entry<br>Can be installed in all supports min. depth 35 mm<br>Telephone and Ethernet applications marked on the protective cap<br>1 module 22.5 x 45 mm<br>UTP double connector<br>8 contacts |
| 10                                 | 5723 35  | 5728 35 |                                                                                                                                                                                                                                                                                                                                    |

Arteor™  
Wi-Fi access points




5723 76

Mechanisms supplied with White and Magnesium square cover plates  
To be equipped with support frames Cat. No. 5760 11 and plates (white Cat No. 5750 30 or pearl aluminium Cat. No. 5750 31)

| Pack | Cat. No.         |                      | Wi-Fi access point                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------|------------------|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    | White<br>5723 76 | Magnesium<br>5728 76 | Come in addition to a new or existing LCS structured cabling, to meet the requirements for mobility in the building (meeting rooms for example)<br>Identical connection to the LCS RJ 45 socket<br>Remote management via a web interface<br>Allow the configuration and the exploitation of the Wi-Fi access point by the network administrator. Security via WPA2 encryption (802.11i) and/or authentication (802.11x)<br>Guest access to offer free access to the guests and keep independent and secure the main Wi-Fi network<br>Supply via Power over Ethernet (standard 802.3 af)<br>4 modules 90 x 45 mm<br>Standards 802.11a and 802.11b/g dual-band dual-radio<br>Data rate: 54 Mbps max. on each frequency (802.11a and 802.11g)<br>Equipped with an RJ 45 socket on the front panel |
| 1    | 5723 77          | 5728 77              | Standards 802.11a and 802.11b/g dual-band dual-radio<br>Data rate: 54 Mbps max. on each frequency (802.11a and 802.11g)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

Arteor™  
Wi-Fi access points

Installation principle

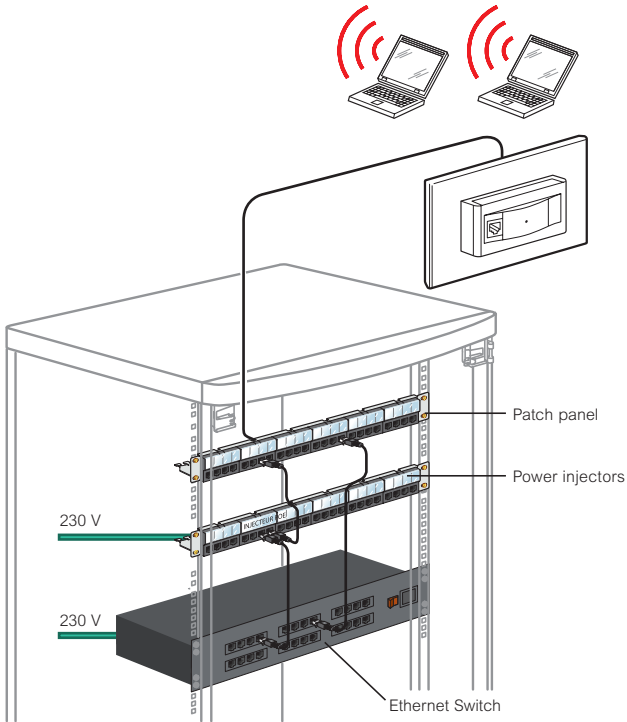

Arteor Wi-Fi access points

A 802.11 a and b/g solution

| Radio communication standard | 802.11 b/g                | 802.11 a |
|------------------------------|---------------------------|----------|
| Power over Ethernet standard | 802.3 af                  |          |
| Frequency band               | between 2.40 and 2.48 GHz | 5 GHz    |
| Number of available channels | 13                        | 8        |
| Max. data rate               | 54 Mbps                   | 54 Mbps  |

Advantages of a Legrand Wi-Fi access point

- Possibility of simultaneous operation on 2 frequencies, a and b/g  
Provides a max. data rate of up to 2 x 54 Mbps in simultaneous mode
- Very high security level: encryption (WPA2 - 802.11i) and authentication (802.1x)
- Possibility of roaming (moving from one access point to another without breaking the link)
- Quality of service (priority automatically given to voice, then video and finally data) in accordance with standard 802.11e
- Easy to configure and make secure with the quick configuration node

**NEW:** Guest access to offer a free access for the guest and keep independent and secure the main Wi-Fi network

Installation

In all supports that can take an Arteor mechanism (ducting, columns, flush-mouting boxes, floor boxes, etc)  
Do not place access points behind an obstacle that would limit the radiation of the antenna  
Access points are connected in the same way as RJ 45 sockets

Sizing

- Provide 1 access point for 1 localised requirement
- Provide 1 access point per 100 m² for global coverage and a maximum gross speed
- Provide 1 access point with an RJ 45 socket for an office used by visitors

Arteor™  
Adaptors for data sockets and USB sockets



5728 38



5727 75



5732 74



5722 84



5722 83



5722 70



5722 90

Support frames and plates selection chart (p. 234)  
For load selection chart please contact HPM Legrand customer service

Mechanisms supplied with White or Magnesium square rocker plates  
To be equipped with support frames and plates (p. 258 - 263)

| Pack | Cat. No.         |                      | Adaptors for data sockets                                                                                         |
|------|------------------|----------------------|-------------------------------------------------------------------------------------------------------------------|
| 10   | White<br>5723 37 | Magnesium<br>5728 37 | Equipped with transparent label-holder<br><b>Keystone</b><br>Adaptor for single connector<br>2 modules 45 x 45 mm |
| 10   | 5723 38          | 5728 38              | <b>Systemax</b><br>Adaptor for single connector<br>2 modules 45 x 45 mm                                           |

| Pack | Cat. No.         |                      | USB female sockets                                                                                                                                                                                                                            |
|------|------------------|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    | White<br>5722 75 | Magnesium<br>5727 75 | Used to bring connections closer to the user<br>For connecting USB devices (scanner-printer, external hard disk)<br>Connection via screw terminals cross-section 1 mm²<br>Recommended cable: USB A<br>Square version<br>1 module 22.5 x 45 mm |
| 1    | 5732 74          | 5737 74              | Round version<br>2 modules 45 x 45 mm                                                                                                                                                                                                         |

Arteor™  
Attenuator, loudspeaker sockets

Support frames and plates selection chart (p. 234)  
For load selection chart please contact HPM Legrand customer service

Mechanisms supplied with White or Magnesium square rocker plates  
To be equipped with support frames and plates (p. 258 - 263)

| Pack | Cat. No.         |                      | Attenuator                                                                                                   |
|------|------------------|----------------------|--------------------------------------------------------------------------------------------------------------|
| 1    | White<br>5722 84 | Magnesium<br>5727 84 | 100 V - 25 W<br>Allow to adjust power to 25 W from a balanced 100 V loudspeaker line<br>2 modules 45 x 45 mm |


| Pack | Cat. No.         |                      | 3-pole XLR sockets                                                                                                                                                                                                                                                                                                                      |
|------|------------------|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    | White<br>5722 83 | Magnesium<br>5727 83 | For the stereo connection of any peripheral, microphone, mixing console<br>Recommended microphone cable: 1 x 0.22 mm² shielded audio pair<br>Recommended speaker cable: 1 x 1.5 mm² audio pair (will take 2.5 mm²)<br>Max. cable length: 50 m (beyond this an audio amplifier is recommended)<br>2 modules 45 x 45 mm<br>Neutrik female |
| 1    | 5722 77          | 5727 77              | Neutrik male                                                                                                                                                                                                                                                                                                                            |

| Pack | Cat. No.         |                      | Loudspeaker sockets                      |
|------|------------------|----------------------|------------------------------------------|
| 10   | White<br>5722 70 | Magnesium<br>5727 70 | 4 mm² terminals<br>1 module 22.5 x 45 mm |
| 10   | 5722 80          | 5727 80              | 4 mm² terminals<br>2 modules 45 x 45 mm  |

| Pack | Cat. No.         |                      | Home theater loudspeakers socket       |
|------|------------------|----------------------|----------------------------------------|
| 10   | White<br>5722 90 | Magnesium<br>5727 90 | 2 connectors<br>2 modules 45 x 45 mm   |
| 5    | 5722 91          | 5727 91              | 4 connectors<br>3 modules 67.5 x 45 mm |



Arteor™  
Audio and video sockets

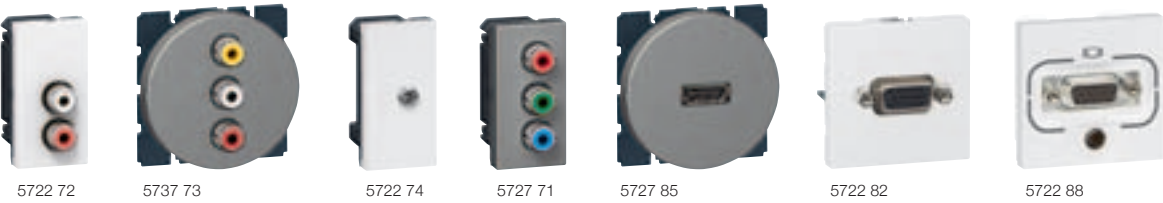

Support frames and plates selection chart (p. 234)  
For load selection chart please contact HPM Legrand customer service

Mechanisms supplied with White or Magnesium square rocker plates  
To be equipped with support frames and plates (p. 258 - 263)

| Pack | Cat. No. |           | Audio and video sockets                                                                                                                                                                                                                                             |
|------|----------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|      | White    | Magnesium |                                                                                                                                                                                                                                                                     |
| 1    | 5722 72  | 5727 72   | <b>2 x female RCA</b><br>For the stereo audio connection of any DVD drive, camera, video recorder, etc. type peripheral<br>Recommended cable: 1 shielded audio pair<br>Square version<br>1 module 22.5 x 45 mm                                                      |
| 1    | 5732 72  | 5737 72   | Round version<br>2 modules 45 x 45 mm                                                                                                                                                                                                                               |
|      |          |           | <b>3 x female RCA</b><br>For the composite video and stereo audio connection of a DVD drive, camera, video recorder, video conference equipment etc.<br>Recommended cable: 1 shielded audio pair + 1 x 3 mm mini-coaxial                                            |
| 1    | 5722 73  | 5727 73   | Square version<br>1 module 22.5 x 45 mm                                                                                                                                                                                                                             |
| 1    | 5732 73  | 5737 73   | Round version<br>2 modules 45 x 45 mm                                                                                                                                                                                                                               |
|      |          |           | <b>Female 3.5 mm jack - square version</b><br>For stereo audio connection from a portable source<br>Recommended cable: 1 x 0.22 mm <sup>2</sup> shielded audio pair                                                                                                 |
| 1    | 5722 74  | 5727 74   | Connection on screw terminals<br>1 module 22.5 x 45 mm                                                                                                                                                                                                              |
|      |          |           | <b>YUV - square version</b><br>For analog high definition connection of a DVD, PC monitor, plasma screen, video projector, graphic paintbox, etc.<br>Recommended cable: 3 x 3 mm mini-coaxial (max. cable length 25 m) or 3 x RG59 coaxial (max. cable length 50 m) |
| 1    | 5722 71  | 5727 71   | 1 module 22.5 x 45 mm                                                                                                                                                                                                                                               |

| Pack | Cat. No. |           | Audio and video sockets (continued)                                                                                                                                                                                                        |
|------|----------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|      | White    | Magnesium |                                                                                                                                                                                                                                            |
| 1    | 5722 81  | 5727 81   | <b>HDMI</b><br>For digital high definition audio and video connection of a PC monitor, plasma screen, video projector, graphic paintbox, etc.<br>Recommended cable Cat. No. 327 80<br>2 modules 45 x 45 mm                                 |
|      |          |           | Square version                                                                                                                                                                                                                             |
| 1    | 5722 85  | 5727 85   | Round version                                                                                                                                                                                                                              |
|      |          |           | <b>S-video sockets (4-pin mini-DIN)</b><br>1-gang<br>Provides the YC video link for any peripheral device such as a DVD drive, camera, video recorder, videoconferencing, etc.                                                             |
| 1    | 5745 01  | 5745 51   | Round version<br>2 modules 45 x 45 mm                                                                                                                                                                                                      |
|      |          |           | <b>Female HD 15</b><br>For VGA, XGA or VESA connection of a PC monitor, plasma screen, video projector, graphic paintbox, etc.<br>Recommended cable Cat. No. 327 81<br>Max. cable length 25 m (beyond this a VGA amplifier is recommended) |
| 1    | 5722 82  | 5727 82   | Connection on screw terminals<br>2 modules 45 x 45 mm                                                                                                                                                                                      |
|      |          |           | <b>Female HD 15 + jack 3.5 mm</b>                                                                                                                                                                                                          |
| 1    | 5722 88  | 5727 88   | 2 modules 45 x 45 mm<br>Square version                                                                                                                                                                                                     |
| 1    | 5722 89  | 5727 89   | Round version                                                                                                                                                                                                                              |

Arteor™  
Audio and video sockets


Support frames and plates selection chart (p. 234)  
For load selection chart please contact HPM Legrand customer service

Mechanisms supplied with White or Magnesium square rocker plates  
To be equipped with support frames and plates (p. 258 - 263)

| Pack | Cat. No. |           | HD 15 amplifier + Jack kit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|------|----------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|      | White    | Magnesium |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 1    | 5723 70  | 5728 70   | Used to connect audio/video terminals at a distance of more than 20 m<br>The video link is via an HD 15 connector (resolution up to UXGA), and the audio link via a 3.5 mm jack<br>Comprises:<br>- One 4-module Arteor transmitter supplied with cover plate equipped with an HD 15 connector and a 3.5 mm jack<br>- One 4-module Arteor receiver equipped with an HD 15 connector and a 3.5 mm jack<br>- One 4-module Arteor power supply to be connected on the mains then linked to the receiver<br>The transmitter and receiver are supplied with an RJ 45 LCS jack for tool-free connection<br>The link between the transmitter and receiver is via a network cable |


Arteor™  
Audio and video sockets

Installation of audio and video sockets in a meeting room

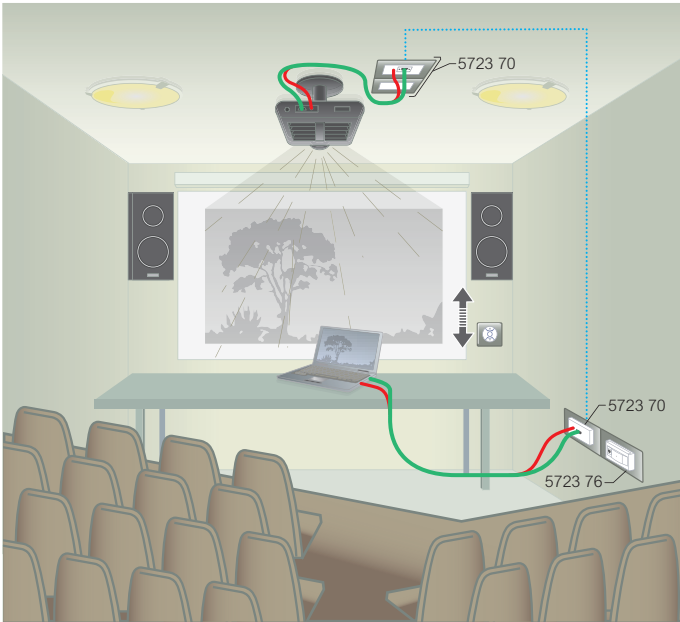

Depending on the size and configuration of your meeting room, it is recommended to link the system 5723 70 to an audio amplification device

Installation of audio and video sockets for Home Cinema

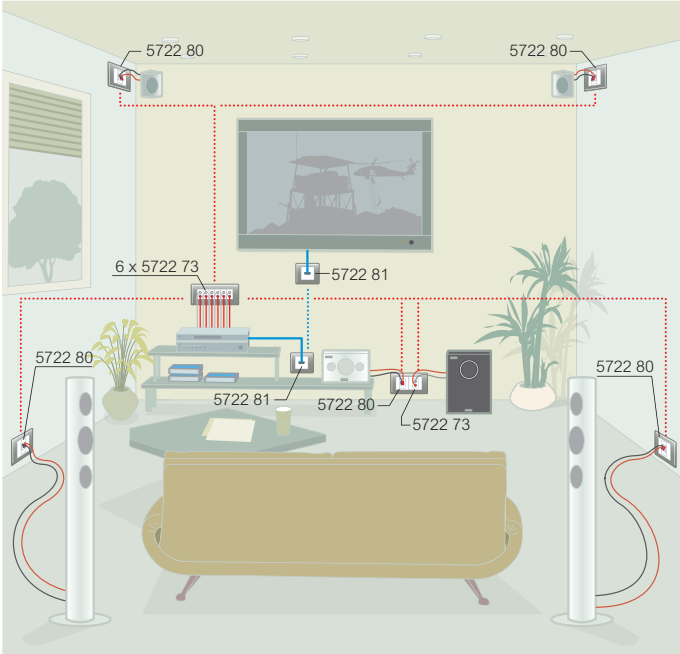



Arteor™  
Blank modules and cover plates



Support frames and plates selection chart (p. 234)  
For load selection chart please contact HPM Legrand customer service

Mechanisms supplied with White or Magnesium square rocker plates  
To be equipped with support frames and plates (p. 258 - 263)


| Pack | Cat. No.         |                      | Blank modules          |
|------|------------------|----------------------|------------------------|
| 10   | White<br>5723 41 | Magnesium<br>5728 41 | <b>Square version</b>  |
|      |                  |                      | 1 module 22.5 x 45 mm  |
|      |                  |                      | 2 modules 45 x 45 mm   |
| 5    | 5723 43          | 5728 43              | 3 modules 67.5 x 45 mm |
| 10   | 5730 86          | 5731 86              | <b>Round version</b>   |
|      |                  |                      | 2 modules              |
| 5    | 5730 96          | 5731 96              | 3 modules              |

Support frames and plates selection charts (p. 172 - 173)

Square version plates  
3 finishes: White, Pearl Alu and Graphite

| Square series blanking cover plates |                   |
|-------------------------------------|-------------------|
| 10                                  | For 2" x 4" boxes |
|                                     | White             |
|                                     | Pearl Alu         |
| 10                                  | Graphite          |

Arteor™  
Standard support frames

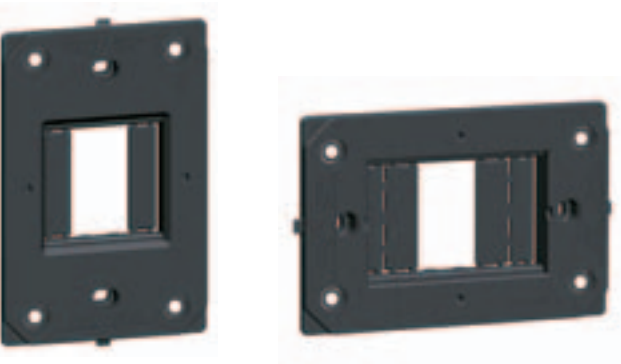

Support frames and plates selection chart (p. 234)

| Pack | Cat. No. | Support frames with standard installation accessories 84 mm fixing centres                                                                                     |
|------|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10   | 5719 10  | <b>Screw mounting</b><br><b>Vertical use only</b><br>For 2 modules (electronic functions, except 2 module mechanisms to be mounted on 3 module support frame ) |
|      | 5719 20  | <b>Horizontal use only</b><br>For 2 or 3 modules                                                                                                               |
| 1    | 429R     | <b>Wall box</b><br>Recessed wall box                                                                                                                           |
| 50   | 711      | <b>Mounting Clips</b><br>Mounting clip for 6.4mm wall board                                                                                                    |
| 50   | 712      | Mounting clip for 10.0mm plasterboard/gyprock                                                                                                                  |
| 20   | 143      | <b>Mounting Bracket</b><br>Standard size mounting bracket                                                                                                      |

Arteor™  
White plate finishes



Support frames and plates selection chart (p. 234)

| Pack | Cat. No.         | Neutral                                                                                                                          | Dimensions in mm  |
|------|------------------|----------------------------------------------------------------------------------------------------------------------------------|-------------------|
| 10   | White<br>5752 30 | <b>Square plates horizontal</b><br>2 modules<br>                                                                                 | 127 x 92          |
| 10   | 5750 10          | 3 modules<br>                                                                                                                    | 127 x 92          |
| 10   | 5752 50          | <b>Square plates vertical</b><br>2 modules<br>                                                                                   | in mm<br>92 x 127 |
| 10   | 5756 20          | <b>Round plates Horizontal</b><br>2 modules<br>                                                                                  | 127 x 92          |
| 10   | 5755 00          | 3 modules<br>                                                                                                                    | 127 x 92          |
| 10   | 5756 30          | <b>Round plates Vertical</b><br>2 modules<br>                                                                                    | 92 x 127          |
| 10   | 5754 30          | <b>Australian plates</b><br>Australian plate suits 770 series switches, double switched and double autoswitched power points<br> | 127 x 92          |
| 10   | 5756 00          | <b>French and German standard</b><br>2 modules<br>                                                                               | 92 x 92           |
| 5    | 5755 10          | 2 x 2 modules<br>                                                                                                                | 157 x 92          |
| 5    | 5755 20          | 3 x 2 modules<br>                                                                                                                | 237.5 x 92        |

Arteor™  
Pearl aluminium and graphite plate finishes



Support frames and plates selection chart (p. 234)

| Pack | Cat. No.             |                     | Neutral                                                                                                                          | Dimensions in mm  |
|------|----------------------|---------------------|----------------------------------------------------------------------------------------------------------------------------------|-------------------|
| 0    | Pearl Alu<br>5752 31 | Graphite<br>5752 32 | <b>Square plates horizontal</b><br>2 modules<br>                                                                                 | 127 x 92          |
| 5    | 5750 11              | 5750 12             | 3 modules<br>                                                                                                                    | 127 x 92          |
| 10   | 5752 51              | 5752 52             | <b>Square plates vertical</b><br>2 modules<br>                                                                                   | in mm<br>127 x 92 |
| 10   | 5756 21              | 5756 22             | <b>Round series Horizontal</b><br>2 modules<br>                                                                                  | 127 x 92          |
| 5    | 5755 01              | 5755 02             | 3 modules<br>                                                                                                                    | 127 x 92          |
| 10   | 5756 31              | 5756 32             | <b>Round series Horizontal</b><br>2 modules<br>                                                                                  | 127 x 92          |
| 10   | 5754 31              | 5754 32             | <b>Australian plates</b><br>Australian plate suits 770 series switches, double switched and double autoswitched power points<br> | 127 x 92          |
| 10   | 5756 01              | 5756 02             | <b>French and German standard</b><br>2 modules<br>                                                                               | 92 x 92           |
| 5    | 5755 11              | 5755 12             | 2 x 2 modules<br>                                                                                                                | 157 x 92          |
| 5    | 5755 21              | 5755 22             | 3 x 2 modules<br>                                                                                                                | 237.5 x 92        |

Arteor™  
Tattoo plate finishes



5764 58




5764 48

Arteor™  
Graphic plate finishes






5764 51



5764 42

 Support frames and plates selection chart (p. 234)

| Pack | Cat. No.             | Tattoo                                                                                                                   |                                                                                                  |                              |  |
|------|----------------------|--------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|------------------------------|--|
| 5    | Edition 1<br>5764 38 | <b>Square series</b><br>                | 2 modules 2" x 4"                                                                                | Dimensions in mm<br>127 x 92 |  |
| 5    | 5764 58              |                                                                                                                          | 3 modules 2" x 4"                                                                                | 127 x 92                     |  |
| 5    | 5764 28              | <b>Round series</b><br>                | 2 modules 2" x 4"                                                                                | 127 x 92                     |  |
| 5    | 5764 48              |                                                                                                                          | 3 modules 2" x 4"                                                                                | 127 x 92                     |  |
| 10   | 5764 78              | <b>Australian plates</b><br>          | Australian plate suits 770 series switches, double switched and double autoswitched power points | 127 x 92                     |  |
| 10   | 5762 38              | <b>French and German standard</b><br> | 2 modules                                                                                        | 92 x 92                      |  |
| 5    | 5762 58              |                                                                                                                          | 2 x 2 modules                                                                                    | 157 x 92                     |  |

 Support frames and plates selection chart (p. 234)

| Pack | Cat. No.          | Graphic                                                                                                                    |                                                                                                  |                              |  |
|------|-------------------|----------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|------------------------------|--|
| 1    | Casual<br>5764 31 | <b>Square series</b><br>                | 2 modules 2" x 4"                                                                                | Dimensions in mm<br>127 x 92 |  |
| 1    | Formal<br>5764 32 |                                                                                                                            | 3 modules 2" x 4"                                                                                | 127 x 92                     |  |
| 1    | 5764 51           | <b>Round series</b><br>                | 2 modules 2" x 4"                                                                                | 127 x 92                     |  |
| 1    | 5764 42           |                                                                                                                            | 3 modules 2" x 4"                                                                                | 127 x 92                     |  |
| 10   | 5764 71           | <b>Australian plates</b><br>          | Australian plate suits 770 series switches, double switched and double autoswitched power points | 127 x 92                     |  |
| 10   | 5764 72           |                                                                                                                            |                                                                                                  |                              |  |
| 10   | 5762 31           | <b>French and German standard</b><br> | 2 modules                                                                                        | 92 x 92                      |  |
| 5    | 5762 52           |                                                                                                                            | 2 x 2 modules                                                                                    | 157 x 92                     |  |

Arteor™  
Mirror plate finishes



5752 74



5756 53

 Support frames and plates selection chart (p. 234)

| Pack | Cat. No.                | Mirror                                                                                                                     |                                                                                                  |                              |  |
|------|-------------------------|----------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|------------------------------|--|
| 1    | Mirror White<br>5752 54 | <b>Square series</b><br>                | 2 modules 2" x 4"                                                                                | Dimensions in mm<br>127 x 92 |  |
| 1    | Mirror Black<br>5752 53 |                                                                                                                            | 3 modules 2" x 4"                                                                                | 127 x 92                     |  |
| 1    | 5752 74                 | <b>Round series</b><br>                | 2 modules 2" x 4"                                                                                | 127 x 92                     |  |
| 1    | 5756 53                 |                                                                                                                            | 3 modules 2" x 4"                                                                                | 127 x 92                     |  |
| 10   | 5754 34                 | <b>Australian plates</b><br>          | Australian plate suits 770 series switches, double switched and double autoswitched power points | 127 x 92                     |  |
| 10   | 5754 33                 |                                                                                                                            |                                                                                                  |                              |  |
| 1    | 5764 84                 | <b>Special plates</b><br>             | For video internal display unit 2.5", BUS alarm module and 3.5" touch screen                     | 127 x 127                    |  |
| 1    | 5765 14                 |                                                                                                                            | For 10" multimedia touch screen                                                                  | 309 x 233                    |  |
| 1    | 5765 24                 |                                       | For central unit for - intruder alarm - temperature control                                      | 165 x 176                    |  |
| 1    | 5765 23                 |                                                                                                                            |                                                                                                  |                              |  |
| 10   | 5756 04                 | <b>French and German standard</b><br> | 2 modules                                                                                        | 92 x 92                      |  |
| 5    | 5755 14                 |                                                                                                                            | 2 x 2 modules                                                                                    | 157 x 92                     |  |
| 5    | 5755 24                 |                                       | 3 x 2 modules                                                                                    | 237.5 x 92                   |  |
| 5    | 5755 23                 |                                                                                                                            |                                                                                                  |                              |  |

Arteor™  
Mirror finish plates



5764 56




 Support frames and plates selection chart (p. 234)

| Pack | Cat. No.                | Mirror                                                                                                                     |                                                                                                  |                              |  |
|------|-------------------------|----------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|------------------------------|--|
| 1    | Mirror Red<br>5764 36   | <b>Square series</b><br>                | 2 modules 2" x 4"                                                                                | Dimensions in mm<br>127 x 92 |  |
| 1    | Mirror Taupe<br>5764 35 |                                                                                                                            | 3 modules 2" x 4"                                                                                | 127 x 92                     |  |
| 1    | 5764 56                 | <b>Round series</b><br>                | 2 modules 2" x 4"                                                                                | 127 x 92                     |  |
| 1    | 5764 45                 |                                                                                                                            | 3 modules 2" x 4"                                                                                | 127 x 92                     |  |
| 10   | 5764 76                 | <b>Australian plates</b><br>          | Australian plate suits 770 series switches, double switched and double autoswitched power points | 127 x 92                     |  |
| 10   | 5764 75                 |                                                                                                                            |                                                                                                  |                              |  |
| 10   | 5762 36                 | <b>French and German standard</b><br> | 2 modules                                                                                        | 92 x 92                      |  |
| 5    | 5762 56                 |                                                                                                                            | 2 x 2 modules                                                                                    | 157 x 92                     |  |
| 5    | 5762 55                 |                                       |                                                                                                  |                              |  |
| 5    | 5762 54                 |                                                                                                                            |                                                                                                  |                              |  |

Arteor™  
Brushed metal plate finishes



5764 40



Arteor™  
Wood plate finishes





5752 75



5764 49

Support frames and plates selection chart (p. 234)

| Pack | Cat. No.                                                                                                |                                                                                                              | Brushed Metal                                                                                                                                                                                                    |                  |            |
|------|---------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|------------|
| 1    |  Gold brass<br>5764 30 |  Stainless steel<br>5752 56 | <b>Square series</b><br> 2 modules 2" x 4"                                                                                      | Dimensions in mm | 127 x 92   |
|      | 5764 50                                                                                                 | 5752 76                                                                                                      |  3 modules 2" x 4"                                                                                                              |                  | 127 x 92   |
| 1    | 5764 20                                                                                                 | 5756 36                                                                                                      | <b>Round series</b><br> 2 modules 2" x 4"                                                                                      |                  | 127 x 92   |
|      | 5764 40                                                                                                 | 5756 56                                                                                                      |  3 modules 2" x 4"                                                                                                            |                  | 127 x 92   |
| 10   | 5764 70                                                                                                 | 5754 36                                                                                                      | <b>Australian plates</b><br> Australian plate suits 770 series switches, double switched and double autoswitched power points |                  | 127 x 92   |
| 10   | 5762 30                                                                                                 | 5756 06                                                                                                      | <b>French and German standard</b><br> 2 modules                                                                               |                  | 92 x 92    |
| 5    | 5762 50                                                                                                 | 5755 16                                                                                                      |  2 x 2 modules                                                                                                                |                  | 157 x 92   |
| 5    | -                                                                                                       | 5755 26                                                                                                      |  3 x 2 modules                                                                                                                |                  | 237.5 x 92 |
| 1    | 5764 80                                                                                                 | 5764 86                                                                                                      | <b>Special plates</b><br> For video internal display unit 2.5", BUS alarm module and 3.5" touch screen                        |                  | 127 x 127  |
| 1    | 5765 10                                                                                                 | 5765 16                                                                                                      |  For 10" multimedia touch screen                                                                                              |                  | 309 x 233  |
| 1    | 5765 20                                                                                                 | 5765 26                                                                                                      |  For central unit for - intruder alarm - temperature control                                                                  |                  | 165 x 176  |

Arteor™  
Leather plate finishes





5764 53



5764 43

Support frames and plates selection chart (p. 234)

| Pack | Cat. No.                                                                                            |                                                                                                         | Leather                                                                                                                                                                                                            |                  |          |
|------|-----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|----------|
| 1    |  Club<br>5764 33 |  Galuchat<br>5764 34 | <b>Square series</b><br> 2 modules 2" x 4"                                                                                      | Dimensions in mm | 127 x 92 |
| 1    | 5764 53                                                                                             | 5764 54                                                                                                 |  3 modules 2" x 4"                                                                                                              |                  | 127 x 92 |
| 1    | 5764 23                                                                                             | 5764 24                                                                                                 | <b>Round series</b><br> 2 modules 2" x 4"                                                                                      |                  | 127 x 92 |
| 1    | 5764 43                                                                                             | 5764 44                                                                                                 |  3 modules 2" x 4"                                                                                                            |                  | 127 x 92 |
| 10   | 5764 73                                                                                             | 5764 74                                                                                                 | <b>Australian plates</b><br> Australian plate suits 770 series switches, double switched and double autoswitched power points |                  | 127 x 92 |
| 10   | 5762 33                                                                                             | 5762 34                                                                                                 | <b>French and German standard</b><br> 2 modules                                                                               |                  | 92 x 92  |
| 5    | 5762 53                                                                                             | 5762 54                                                                                                 |  2 x 2 modules                                                                                                                |                  | 157 x 92 |

Arteor™  
Signature plate finishes





5764 57



5764 47

Support frames and plates selection chart (p. 234)

| Pack | Cat. No.                                                                                                   | Signature                                                                                                                                                                                                          |                  |           |
|------|------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|-----------|
| 1    |  Woven Metal<br>5764 37 | <b>Square series</b><br> 2 modules 2" x 4"                                                                                      | Dimensions in mm | 127 x 92  |
| 1    | 5764 57                                                                                                    |  3 modules 2" x 4"                                                                                                              |                  | 127 x 92  |
| 1    | 5764 27                                                                                                    | <b>Round series</b><br> 2 modules 2" x 4"                                                                                      |                  | 127 x 92  |
| 1    | 5764 47                                                                                                    |  3 modules 2" x 4"                                                                                                            |                  | 127 x 92  |
| 10   | 5764 77                                                                                                    | <b>Australian plates</b><br> Australian plate suits 770 series switches, double switched and double autoswitched power points |                  | 127 x 92  |
| 1    | 5764 87                                                                                                    | <b>Special plates</b><br> For video internal display unit 2.5", BUS alarm module and 3.5" touch screen                        |                  | 127 x 127 |
| 1    | 5765 17                                                                                                    |  For 10" multimedia touch screen                                                                                              |                  | 309 x 233 |
| 1    | 5765 37                                                                                                    |  For central unit for - intruder alarm - temperature control                                                                  |                  | 165 x 176 |
| 10   | 5762 37                                                                                                    | <b>French and German standard</b><br> 2 modules                                                                               |                  | 92 x 92   |
| 5    | 5762 57                                                                                                    |  2 x 2 modules                                                                                                                |                  | 157 x 92  |





# ZigBee®\* wireless technology

Ideal for refurbishments, small new installations and increasing the number of control points, without damaging the walls



► LIGHTING CONTROL



RECEIVER DIMMER SWITCH  
(See p. 268)  
Indicates the light intensity via LEDs

► SCENARIO CONTROL




4 SCENARIO CONTROL  
(See p. 268)

► ROLLER BLIND CONTROL



INDIVIDUAL RECEIVER ROLLER BLIND SWITCH  
(See p. 269)  
Controls any type of electric roller blind motor

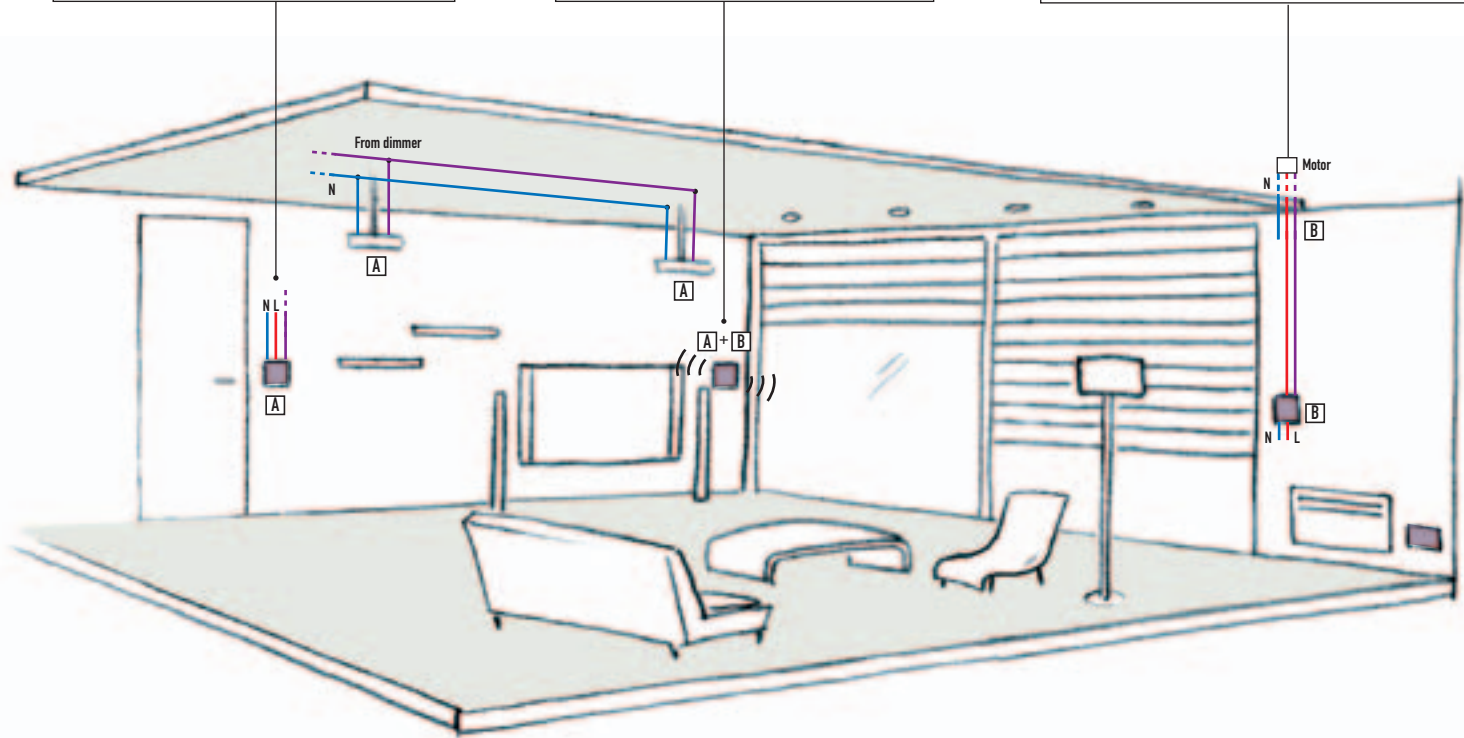


**A** Indicates lighting control  
**B** Indicates roller blind control

INTERACTIVITY OF FUNCTIONS

ZigBee® wireless technology is an international low consumption radio communication standard. Operating at a frequency of 2.4 GHz, it can be used, via transmitters (wireless) and receivers, to control lighting,

roller blinds, as well as technical alarms. It can also control scenarios, and allows bidirectional communication between devices. It can be used in addition to the BUS system.

WIRING DIAGRAM

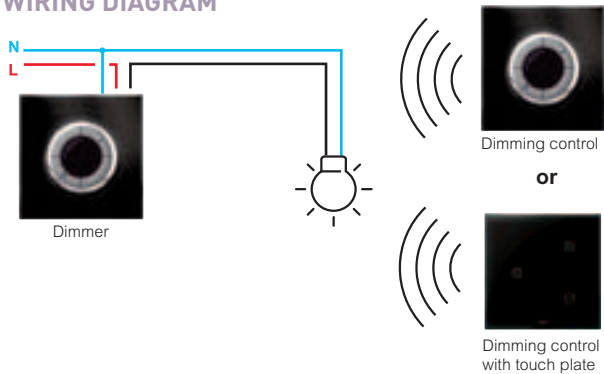





\* ZigBee® Certified product - Manufacturer Specific Profile

Whilst most items are stock lines some products are made to order  
For delivery dates and latest prices please contact your local HPM Legrand customer service representative  
For pack quantity, please refer to numerical index pages

Whilst most items are stock lines some products are made to order  
For delivery dates and latest prices please contact your local HPM Legrand customer service representative  
For pack quantity, please refer to numerical index pages



Arteor™  
Quick reference guide – Wireless/ZigBee™

| Device                                  | Type                       | Description                   | Mechanism                                                                           |                                                                                                |                                                                                                         |   | Support frames and plates                                                                                                                                                                    |                                                                                                                                                                                          |                                                                                                             |                                                                                                                    |                                                                                                                                              |                                                                                                                                                                                              |                                                                                                                                                                                          |
|-----------------------------------------|----------------------------|-------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Receiver/<br>transmitter<br>to be wired | Hard button                | 1 gang switch<br>with neutral |    | <br>5738 22 | <br>5738 23<br>Black | + | Horizontal Installation                                                                                                                                                                      |                                                                                                                                                                                          |                                                                                                             | OR                                                                                                                 | Vertical Installation                                                                                                                        |                                                                                                                                                                                              |                                                                                                                                                                                          |
|                                         |                            | 2 gang switch<br>with neutral |    | 5738 24                                                                                        | 5738 25                                                                                                 |   | <br>5719 20<br>Horizontal<br>use only<br>for 2 or 3<br>modules                                            | <br>White<br>5756 20                                                                                  | <br>Pearl Alu<br>5756 21 |                                                                                                                    | <br>Graphite<br>5756 22                                   | <br>5719 10<br>Vertical<br>use only<br>for 2<br>modules                                                   | <br>White<br>5756 30                                                                                  |
|                                         | Capacitive<br>touch plates | 1 gang switch<br>with neutral |    | 5738 22                                                                                        | 5738 23                                                                                                 | + | British standard                                                                                                                                                                             |                                                                                                                                                                                          |                                                                                                             | OR                                                                                                                 | Vertical Installation<br>Italian & American standard                                                                                         |                                                                                                                                                                                              |                                                                                                                                                                                          |
|                                         |                            | 2 gang switch<br>with neutral |    |                                                                                                | 5738 25                                                                                                 |   | <br>5760 03<br>British Standard<br>use only                                                               | 1 gang <br>2 gang  | <br>5737 50              |                                                                                                                    | <br>Black<br>5737 51                                      | <br>5719 10<br>Vertical<br>use only<br>for 2<br>modules                                                   | 1 gang <br>2 gang  |
| Transmitter                             | Hard button                | 1 gang switch<br>with neutral |    | 5738 34                                                                                        |                                                                                                         | + | Vertical Installation                                                                                                                                                                        |                                                                                                                                                                                          |                                                                                                             |                                                                                                                    |                                                                                                                                              |                                                                                                                                                                                              |                                                                                                                                                                                          |
|                                         |                            | 2 gang switch<br>with neutral |   | 5738 36                                                                                        | 5738 37                                                                                                 |   | <br>White<br>5756 30                                                                                     | <br>Pearl Alu<br>5756 31                                                                             | <br>Graphite<br>5756 32 | <br>Stainless Steel<br>5756 36 |                                                                                                                                              |                                                                                                                                                                                              |                                                                                                                                                                                          |
|                                         | Capacitive<br>touch plates | 1 gang switch<br>with neutral |  | 5738 34                                                                                        | 5738 35                                                                                                 | + | British standard                                                                                                                                                                             |                                                                                                                                                                                          |                                                                                                             | OR                                                                                                                 | Vertical Installation<br>Italian & American standard                                                                                         |                                                                                                                                                                                              |                                                                                                                                                                                          |
|                                         |                            | 2 gang switch<br>with neutral |  | 5738 36                                                                                        | 5738 37                                                                                                 |   | 1 gang <br>2 gang  | <br>White<br>5737 50                                                                                | <br>Black<br>5737 51   |                                                                                                                    | <br>5719 10<br>Vertical<br>use only<br>for 2<br>modules | 1 gang <br>2 gang  | <br>White                                                                                           |

For full selection of other functions see page 268 - 269

Arteor™ Wireless/ZigBee®  
Lighting control and automation



Support frames and plates selection charts (p. 236 - 237)  
Switches and dimmers max. loads selection chart (p. 271)

Mechanisms equipped with White or Black round cover plates and Magnesium circular push control, to be equipped with 2-module plates  
Standard rocker plates and plates can be replaced by touch plates (p. 270)

| Pack | Cat. No. |         | Control mechanisms (receivers)<br>100-240 V                                                                                                    |
|------|----------|---------|------------------------------------------------------------------------------------------------------------------------------------------------|
|      |          |         | To be installed in flush-mounting boxes min. depth 40 mm<br>2 modules to be equipped with support frames (p. 258 - 296)                        |
| 1    | 5738 12  | 5738 13 | <b>Switches without neutral</b><br>1 gang switch<br>300 W - with blue LED status indicator supplied<br>To be mounted on 2-module support frame |
| 1    | 5738 22  | 5738 23 | <b>Switches with neutral</b><br>1 gang switch<br>2500 W with blue LED status indicator supplied<br>To be mounted on 2-module support frame     |
| 1    | 5738 24  | 5738 25 | 2 gang switch<br>2 x 1000 W with blue LED status indicator supplied<br>To be mounted on 2-module support frame                                 |
| 1    | 5738 26  | 5738 27 | 3 gang switch<br>3 x 1000 W with blue LED status indicator supplied<br>To be mounted on 3-module support frame                                 |
| 1    | 5738 40  | 5738 41 | <b>Roller blinds switches</b><br>Switch with preset function<br>To be mounted on 2-module support frame                                        |
| 1    | 5738 32  | 5738 33 | <b>Dimmers 0-10 V</b><br>For fluorescent lamps 1000 W with 0-10 V ballasts<br>To be mounted on 3-module support frame                          |

| Pack | Cat. No. |         | Remote control transmitters                                                                                                                                                                                                                                                |
|------|----------|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    |          |         | Surface-mounting (no wiring needed)<br>Supplied with batteries and support frames<br>2 modules                                                                                                                                                                             |
| 1    | 5738 34  | 5738 35 | <b>Switch transmitters</b><br>For 1 gang switch                                                                                                                                                                                                                            |
| 1    | 5738 36  | 5738 37 | For 2 gang switch                                                                                                                                                                                                                                                          |
| 1    | 5738 38  | 5738 39 | <b>Dimmer transmitters</b><br>For dimmer                                                                                                                                                                                                                                   |
| 1    | 5738 42  | 5738 43 | <b>Roller blinds switch transmitters</b><br>For roller blinds switch                                                                                                                                                                                                       |
| 1    |          |         | <b>Scenario controllers</b><br>Surface-mounting (no wiring needed)<br>Supplied with batteries and support frames<br>2 modules<br>For BUS or radio installations<br>4 push-buttons to control 4 scenarios (1 scenario can control several functions: shutters, lighting...) |
| 1    | 5738 48  | 5738 49 |                                                                                                                                                                                                                                                                            |
| 1    | 5738 70  |         | <b>Mobile scenario controllers</b><br><b>Pocket remote controller</b><br>4 push-buttons to control 4 scenarios (1 scenario can control several functions: shutters, lighting...)<br>Can be used with all radio flush-mounting control mechanisms                           |
| 1    | 882 32   |         | <b>IR/RF remote control</b><br>4 push-buttons to control 4 scenarios and general ON/OFF                                                                                                                                                                                    |

ZigBee®: Certified product  
Manufacturer Specific Profile

Scenario controllers with specific marking for hotels (see p. 246)

Arteor™ Wireless/ZigBee®  
Lighting control and automation touch plates



Technical characteristics (p. 270)

White or Black touch plates to replace standard rocker plates and plates

| Pack | Cat. No. |         | Touch plates for switch receivers and transmitters                                                                                 |
|------|----------|---------|------------------------------------------------------------------------------------------------------------------------------------|
| 1    |          |         | <b>British standard fixing centres</b><br>For 1 gang mechanism                                                                     |
| 1    | 5737 54  | 5737 55 | For 2 gang mechanism                                                                                                               |
| 1    | 5737 64  | 5737 65 | For 3 gang mechanism                                                                                                               |
| 1    | 5737 52  | 5737 53 | <b>Italian and American standard fixing centres</b><br>For 1 gang mechanism                                                        |
| 1    | 5737 56  | 5737 57 | For 2 gang mechanism                                                                                                               |
| 1    | 5737 66  | 5737 67 | For 3 gang mechanism                                                                                                               |
| 1    |          |         | <b>Touch plates for dimmer receivers and transmitters</b><br><b>British standard fixing centres</b><br>For 1 gang mechanism        |
| 1    | 5737 58  | 5737 59 |                                                                                                                                    |
| 1    | 5737 60  | 5737 61 | <b>Italian and American standard fixing centres</b><br>For 1 gang mechanism                                                        |
| 1    |          |         | <b>Touch plates for roller blinds switch receivers and transmitters</b><br>British standard fixing centres<br>For 1 gang mechanism |
| 1    | 5737 68  | 5737 69 |                                                                                                                                    |
| 1    | 5737 70  | 5737 71 | Italian and American standard fixing centres<br>For 1 gang mechanism                                                               |
| 1    |          |         | <b>Touch plates for scenario controllers</b><br>British standard fixing centres                                                    |
| 1    | 5737 90  | 5737 91 |                                                                                                                                    |
| 1    | 5737 92  | 5737 93 | Italian and American standard fixing centres                                                                                       |

ZigBee®: Certified product  
Manufacturer Specific Profile

Arteor™ Wireless/ZigBee®  
Other functions




Support frames and plates selection charts (p. 236 - 237)

| Pack | Cat. No. |         | Other Arteor™ functions                                                                                                                                                                                                                 |
|------|----------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    |          |         | Mechanisms equipped with White or Black cover plates and Magnesium circle for control, to be equipped with support frames (p. 258 - 296) and 2-module plates (p. 236 - 237)<br>To be installed in flush-mounting boxes min. depth 40 mm |
| 1    | 5738 72  | 5738 73 | <b>Technical alarms</b><br>2 modules<br>Actuator 100-240 V~ - 10 A                                                                                                                                                                      |
| 1    | 5738 74  | 5738 75 | Transceiver                                                                                                                                                                                                                             |
| 1    | 5738 56  | 5738 57 | <b>Gateways SCS/ZigBee®</b><br>2 modules<br>Allow the extension of a BUS/SCS system with ZigBee® devices                                                                                                                                |
| 1    | 5738 58  |         | <b>Weatherproof switches 230 V~</b><br>Can be controlled with switch transmitters<br>Mechanisms supplied with black rocker plates<br>Surface-mounting<br>Switch with neutral 2500 W                                                     |
| 1    | 5738 60  |         | Switch with neutral 2 x 2500 W                                                                                                                                                                                                          |
| 1    | 5738 62  |         | Switch 2500 W                                                                                                                                                                                                                           |
| 1    | 5738 66  |         | Dimmer for ballast 0-10 V                                                                                                                                                                                                               |


Arteor™ Wireless/ZigBee®  
Touch plates

■ Transformation into touch plates version of standard control mechanisms (receivers) and remote control transmitters equipped with rocker plates

Remote control transmitter with supplied support frame (Italian/American)  
By removing fins, can be adapted to other standards fixing centres

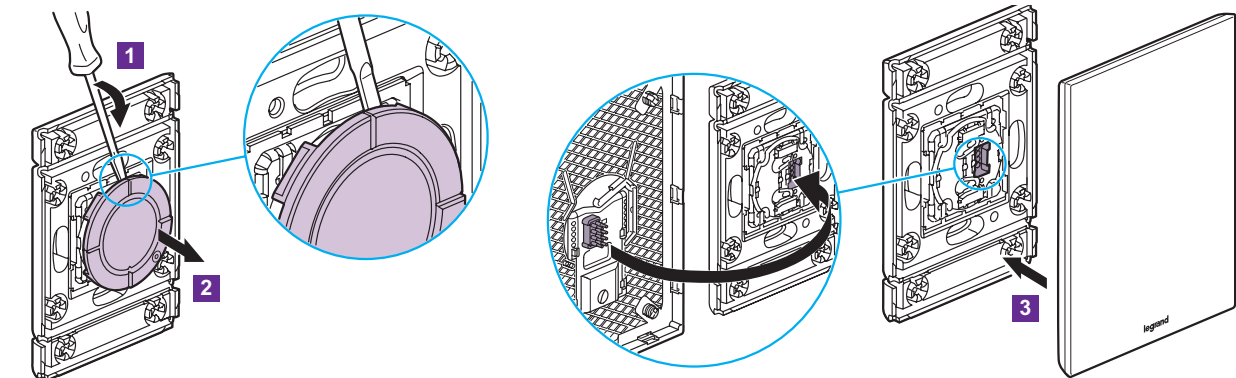

Control mechanism (receiver) with US support frame (not supplied)

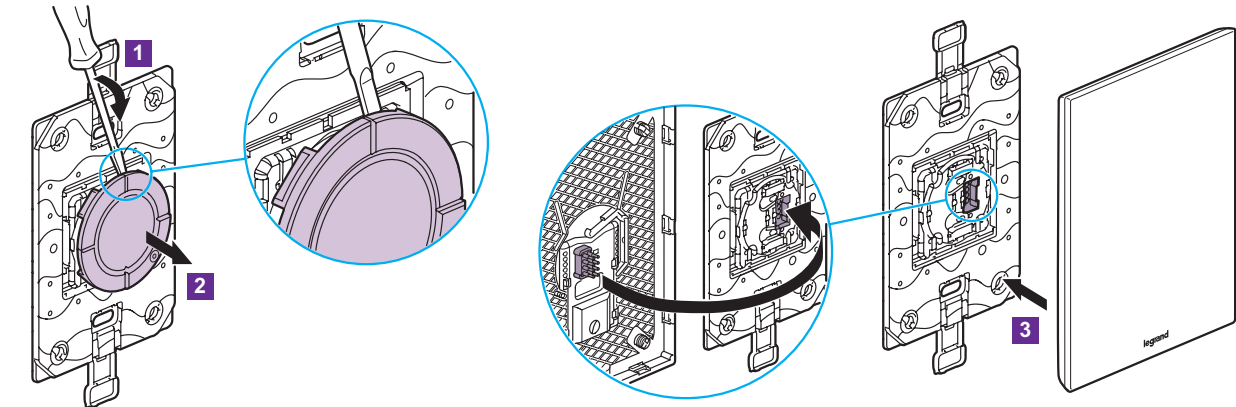

■ Selection chart for association of touch plates

| Function                                  | Touch plates |        |                   |                                 | Associate mechanism                      |                            |
|-------------------------------------------|--------------|--------|-------------------|---------------------------------|------------------------------------------|----------------------------|
|                                           |              | Colour | BS fixing centres | Italian/American fixing centres | Control mechanism (receiver)             | Remote control transmitter |
| Touch control switch 1 gang               |              | White  | 5737 50           | 5737 52                         | 5738 12<br>5738 13<br>5738 22<br>5738 23 | 5738 34<br>5738 35         |
|                                           |              | Black  | 5737 51           | 5737 53                         |                                          |                            |
| Touch control switch 2 gang               |              | White  | 5737 54           | 5737 56                         | 5738 24<br>5738 25                       | 5738 36<br>5738 37         |
|                                           |              | Black  | 5737 55           | 5737 57                         |                                          |                            |
| Touch control switch 3 gang               |              | White  | 5737 64           | 5737 66                         | 5738 26<br>5738 27                       |                            |
|                                           |              | Black  | 5737 65           | 5737 67                         |                                          |                            |
| Touch control dimmer 1 gang               |              | White  | 5737 58           | 5737 60                         | 5738 32<br>5738 33                       | 5738 38<br>5738 39         |
|                                           |              | Black  | 5737 59           | 5737 61                         |                                          |                            |
| Touch control roller blinds switch 1 gang |              | White  | 5737 68           | 5737 70                         | 5738 40<br>5738 41                       | 5738 42<br>5738 43         |
|                                           |              | Black  | 5737 69           | 5737 71                         |                                          |                            |
| 4 scenarios touch control                 |              | White  | 5737 90           | 5737 92                         | 5738 48<br>5738 49                       |                            |
|                                           |              | Black  | 5737 91           | 5737 93                         |                                          |                            |

ZigBee®: Certified product - Manufacturer Specific Profile

Arteor™ Wireless/ZigBee®  
Switches and dimmers max. loads selection charts

■ Switches and dimmers maximum loads at 230 V

| Universal    |                   |              |                                            |                                         |                  |                          |            |                                       |                           |
|--------------|-------------------|--------------|--------------------------------------------|-----------------------------------------|------------------|--------------------------|------------|---------------------------------------|---------------------------|
| Leading edge |                   |              |                                            |                                         | Trailing edge    |                          |            |                                       |                           |
|              |                   |              |                                            |                                         |                  |                          |            |                                       |                           |
| Cat. No.     | Incandescent lamp | Halogen lamp | ELV halogen with ferromagnetic transformer | ELV halogen with electronic transformer | Fluorescent tube | Compact fluorescent lamp | LED        | Fluorescent lamps with 0-10 V ballast | Reducer motor for shutter |
| SWITCHES     | 5738 12/13        | 300 W        | 300 W                                      | 300 VA                                  | 300 VA           |                          |            |                                       |                           |
|              | 5738 22/23        | 2500 W       | 2500 W                                     | 2500 VA                                 | 2500 VA          | 1250 VA                  | 1250 VA    |                                       | 250 VA                    |
|              | 5738 24/25        | 2 x 1000 W   | 2 x 1000 W                                 | 2 x 1000 VA                             | 2 x 1000 VA      | 2 x 500 VA               | 2 x 500 VA |                                       | 2 x 100 VA                |
|              | 5738 26/27        | 3 x 1000 W   | 3 x 1000 W                                 | 3 x 1000 VA                             | 3 x 1000 VA      | 3 x 500 VA               | 3 x 500 VA |                                       | 3 x 100 VA                |
|              | 5738 40/41        |              |                                            |                                         |                  |                          |            |                                       | 500 VA                    |
|              | 5738 62           | 2500 W       | 2500 W                                     | 2500 VA                                 | 2500 VA          | 1250 VA                  | 1250 VA    |                                       | 250 VA                    |
| DIMMER       | 5738 32/33        |              |                                            |                                         |                  |                          |            | 1000 VA                               |                           |