



EVO ORB BULKHEAD.



Evo Orb combines intelligent functionality with durable performance. Designed to adapt to any environment, it delivers flexibility, longevity, and energy efficiency in one compact unit.



Power Selectable

With Power Selectable technology, Evo Orb lets you choose between 10W, 13W, or 15W, giving you the flexibility to match light output to your space without changing the fitting.

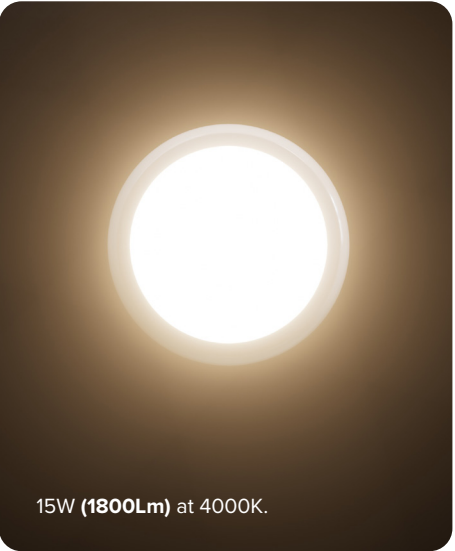

Colour Temperature Selectable

Evo Orb lets you choose between 3000K (warm white), 4000K (cool white), and 6000K (daylight), all from one fitting. Perfect for creating the ideal lighting mood in any space.

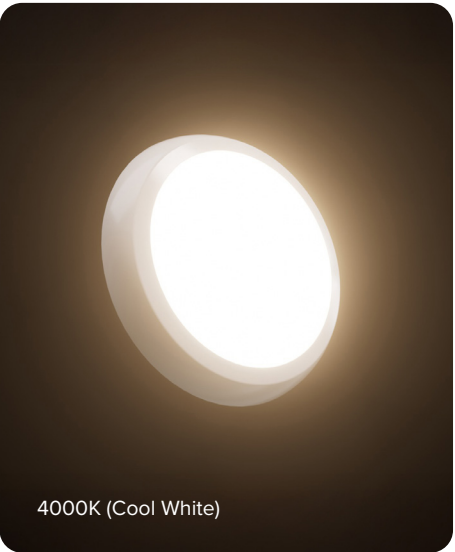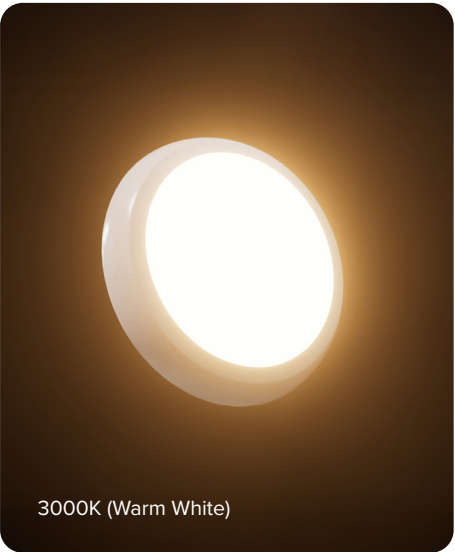

Quick and Easy Installation.

Save time on site with a design focused on installer first details. Evo Orb reduces downtime with clever features that make every install smoother.




BESA Mountable Base

Designed to align with standard BESA box spacing for quick and secure mounting, no need for additional brackets or adaptors.



M20 Gland Entry Points

Featuring four M20 gland entry points for flexible wiring options. The bezel also includes knockouts to accommodate glands.

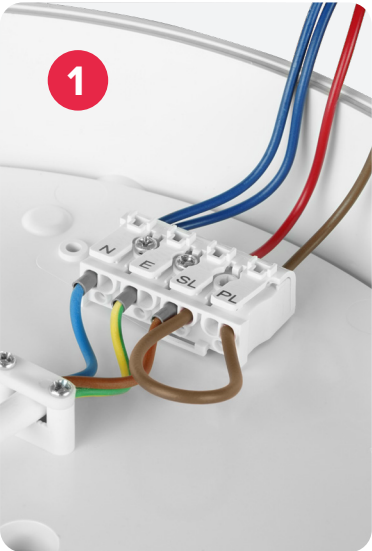


Quick Connections

The Fast Fit terminal block allows tool-free wiring for a quicker install, while the integrated Molex style connector ensures a secure, plug-and-play connection, saving time on every job.

1 Fast Fit Terminal Block


2 Quick install Molex Connector

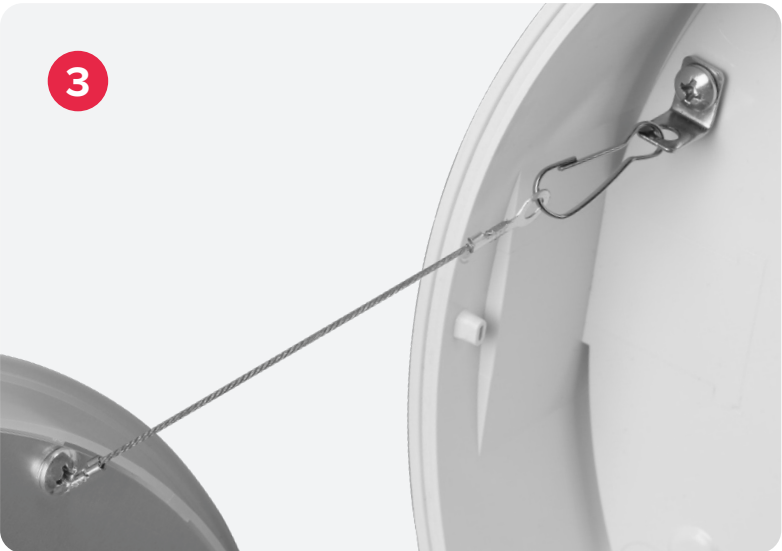

Quick Release Clip

The gear tray comes pre-attached to the diffuser, streamlining installation. When needed, it can be easily disconnected from the base using the quick release clip.

3 Quick Release Suspension Clip

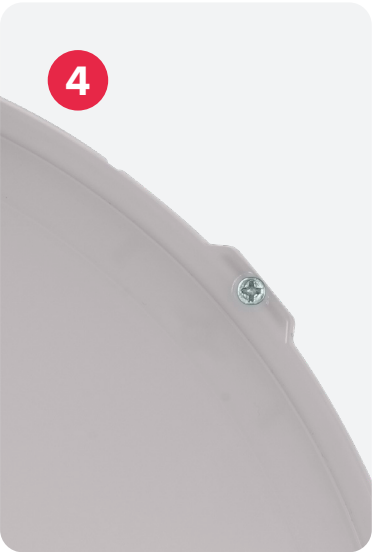

Secure & Quick Entry

The diffuser easily twists off the base for quick access during installation or maintenance. For added peace of mind, a retaining lid screw is included to firmly lock the diffuser in place once fitted.

4 Retaining Lid Screw

5 Quick Turn Diffuser

Step Dim Corridor Function.

The Microwave Sensor version activates on motion and steps down to 10% or 30% when no movement is detected, delivering energy savings without compromising safety. Ideal for corridors, stairwells, and low-traffic areas.



1

Standby Mode
Luminaire remains at a lower light level for a set time when no motion is detected.

2

Detection
Sensor picks up movement and instantly raises luminaire to full brightness.

3


Hold Time
Full brightness is maintained for the set time after the last detection.

4

Step to Dim
When the hold time elapses, the luminaire will step back down to the selected standby level.

Optional Self Testing

With Evo Orb Emergency versions, you can choose between Standard and Self-Test Emergency modes by selecting the position of the switch, giving you full control with a simple switch.

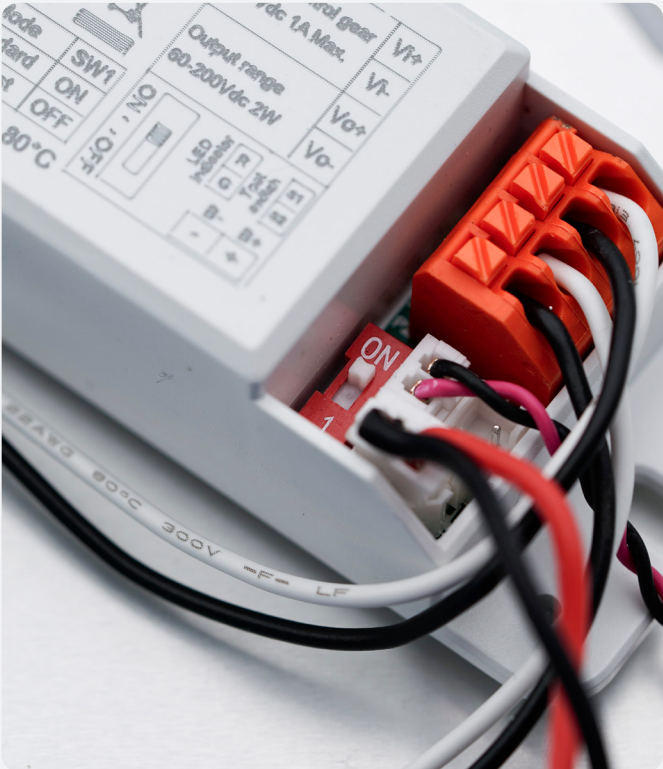

SKU	Wattage	Colour Temperature	Variant	Dimensions	
OEO15	10W / 13W / 15W	3000K / 4000K / 6000K	Standard	320mm Ø	78mm
OEO15-M	10W / 13W / 15W	3000K / 4000K / 6000K	Microwave		
OEO15-E	10W / 13W / 15W	3000K / 4000K / 6000K	Emergency		
OEO15-ME	10W / 13W / 15W	3000K / 4000K / 6000K	Microwave + Emergency		

Lighting Design Service

We offer a dedicated lighting & connection design service, allowing customers to access free lighting design schemes for their commercial projects.

- [oviauk.com](#)
- +44 (0) 1827 300 640
- lighting-design@oviauk.com



Lighting Design Calculator

Design your ideal setup with our Lighting Design Calculator, featuring energy and cost-saving insights.

- [oviauk.com](#)
- +44 (0) 1827 300 640
- lighting-design@oviauk.com



Errors and Omissions excluded. Specification is subject to change without notice.



United Kingdom

Scolmore House, Mariner
Lichfield Road Industrial
Estate Tamworth,
Staffordshire, B79 7UL

+44 (0)1827 300640
sales@oviaUK.com

www.oviaUK.com



Ireland

Ovia Lighting Ireland, 18
Corrig Road, Sandyford
Industrial Estate, Dublin,
D18 WV79

+353 1 9123462
sales@ovia.ie

www.ovia.ie



Dubai, UAE

Lake Central Tower,
Office 1803, Business Bay,
Dubai, UAE

+971 4589 6552
sales@scolmoreme.com

www.scolmoreme.com