

B2001 SERIES



DECORATIVE [CATEGORY P]

The B2001 Series is designed to provide an economical and efficient method of area lighting. The Sylvania B2001 Nostalgia Series presents the opportunity to create modern, energy efficient street lighting systems, whilst maintaining a nostalgic appearance. Apart from its decorative attraction, both models for the B2001 and Nostalgia provide a street lighting distribution to meet AS1158 Category P for Minor Road Lighting and AS1158.6.

Both models are designed as a completely integral unit with lamp and control gear easily accessible for maintenance. The body assembly is pressure die-cast aluminium with stainless steel fixings used exclusively in manufacture and the radial prismatic refractor is injection moulded acrylic.

Complementary to this series of luminaires is a range of Sylvania Estate Columns.

LUMINAIRE CONSTRUCTION

- B2001 - Pressure die-cast aluminium body and canopy
- B2001 Shade & B2001 Nostalgia - Pressure die-cast aluminium body and spun aluminium canopy
- IP54 optical & gear chamber with acrylic Type 3 refractor
- Post top mounting (Ø76 x 80) fits 76mm OD pipe.
- Black polyester powdercoat finish as standard

FEATURES

- 26W CF - 125W HID lamps
- Category P distribution
- Integral 250V HPF control gear
- Options:
 - D2 type photoelectric control switch
 - Symmetric distribution with Type 5 acrylic refractor
 - Polyester powdercoat finish in various colours




B2001




B2001 Shade



B2001 Nostalgia

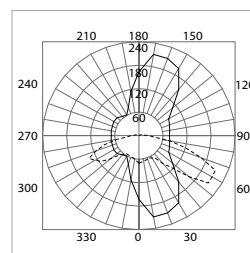

B2001 Nostalgia 70HPS
 Vertical Plane Through Horizontal Angles (10-190)
 — Horizontal Cone Through Vertical Angle (62.5)
 cd/km

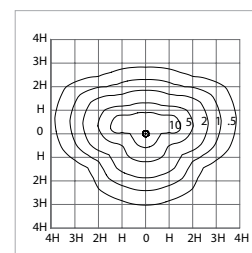


B2001 Nostalgia Series 70HPS
 H = 4.5m


H	Multiplier
4.0	1.27
4.5	1.00
5.0	0.81

B2001 SERIES

Description	Type	Base	Lamp	Weight	Order Code
B2001					
B2001 32W CF	Compact Fluorescent	GX24q-3	Lynx-CFTE32W	5.3kg	D9800L
B2001 42W CF	Compact Fluorescent	GX24q-4	Lynx-CFTE42W	5.3kg	D97100L
B2001 80W MV	Mercury Vapour	E27	HSLBW80	6.0kg	D1100L
B2001 125W MV	Mercury Vapour	E27	HSLBW125	6.6kg	D1300L
B2001 70W HPS	High Pressure Sodium	E27	SHF 70/CO/I	6.5kg	D4100L
B2001 100W MA	Metal Halide	E27	M100/CO/U	6.6kg	D1900L
B2001 Shade					
B2001 Shade 32W CF	Compact Fluorescent	GX24q-3	Lynx-CFTE32W	5.3kg	DC9800L
B2001 Shade 32W CF	Compact Fluorescent	GX24q-4	Lynx-CFTE42W	5.3kg	DC97100L
B2001 Shade 80W MV	Mercury Vapour	E27	HSLBW80	9.0kg	DC1100L
B2001 Shade 125W MV	Mercury Vapour	E27	HSLBW125	9.6kg	DC1300L
B2001 Shade 70W HPS	High Pressure Sodium	E27	SHF 70/CO/I	9.5kg	DC4100L
B2001 Shade 100W MA	Metal Halide	E27	M100/CO/U	9.6kg	DC1900L
B2001 Nostalgia					
B2001 Nost 32W CF	Compact Fluorescent	GX24q-3	Lynx-CFTE32W	5.3kg	DB9800L
B2001 Nost 32W CF	Compact Fluorescent	GX24q-4	Lynx-CFTE42W	5.3kg	DB97100L
B2001 Nost 80W MV	Mercury Vapour	E27	HSLBW80	9.0kg	DB1100L
B2001 Nost 125W MV	Mercury Vapour	E27	HSLBW125	9.6kg	DC1300L
B2001 Nost 70W HPS	High Pressure Sodium	E27	SHF 70/CO/I	9.5kg	DC4100L
B2001 Nost 100W MA	Metal Halide	E27	M100/CO/U	9.6kg	DC1900L

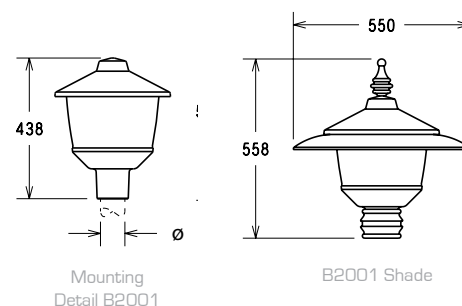

Mounting
Detail B2001



76 O.D. x 80 long

B2001 Nostalgia

Note: the above codes are for standard products only. Please refer to SLA Pricelist for options.

KENSINGTON LONGREACH SERIES



DECORATIVE [CATEGORY P]

The Kensington Longreach Series has been designed to complement the Kensington Series. The longer body assembly complements slender streetscapes available with either a traditional chimney or Corinthian finial available upon request.

The luminaire is constructed from cast aluminium and incorporates glass panels. The optical control is created by an injection moulded acrylic prismatic refractor providing road lighting to AS1158 Category P Minor Road Lighting standards and AS1158.6. The standard Kensington Longreach is supplied with decorative finial and Corinthian base. Colour finish is Black Powder Coat with special colours available to order. The control gear is integral and housed in the top section of the luminaire with hinges for ease of lamp replacement and maintenance. PE cell control is available. A range of heritage style columns and accessories, such as ladder rests and colonial windows are available to enhance the authenticity of the Kensington range. Metal halide light sources are available with ignitor reactor gear as an option.

LUMINAIRE CONSTRUCTION

- Die-cast aluminium body and fibreglass reinforced polyester resin canopy
- IP66 optical chamber with glass visor
- Remote control gear.
- Post Top mounting
- Grey polyester powdercoat finish as standard



FEATURES

- 26W CF-100W HID lamps
- Integral 250V HPF control gear
- Options:
 - Heritage Windows
 - Decorative base and spire
 - D2 type photoelectric control switch
 - Polyester powdercoat finish in various RAL colour




Standard

Heritage

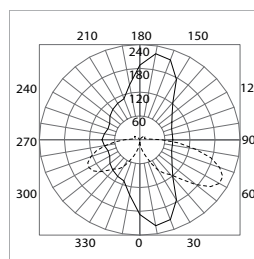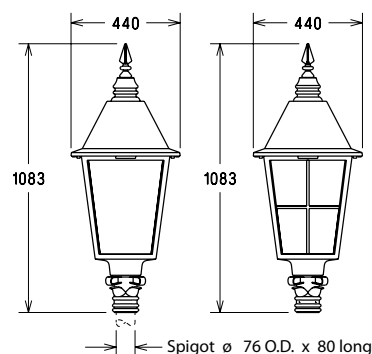

Kensington Longreach 70HPS
 --- Vertical Plane Through Horizontal Angles (10-190)
 --- Horizontal Cone Through Vertical Angle (62.5)
 cd/klm

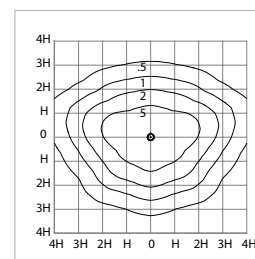

Kensington Longreach 70HPS
 H = 4.5m

H	Multiplier
4.0	1.27
4.5	1.00
5.0	0.81

KENSINGTON LONGREACH SERIES



Description	Type	Base	Lamp	Weight	Order Code
Kens Longreach 32W CF	Compact Fluorescent	GX24q-3	Lynx-CFTE32W	13.8kg	LN9800L
Kens Longreach 32W CF	Compact Fluorescent	FX24q-4	Lynx-CFTE42W	13.8kg	LN9700L
Kens Longreach 80W MV	Mercury Vapour	E27	HSLBW80	14.6kg	LN1100L
Kens Longreach 70W HPS	High Pressure Sodium	E27	SHP70/CO/I	14.8kg	LN4100L
Kens Longreach 100W HPS	High Pressure Sodium	E27	SHP100/CO/I	15.0kg	LN4700L
Kens Longreach 100W MA	Metal Halide	E27	M100/CO/U	15.0kg	LN1900L

Note: the above codes are for standard products only. Please refer to SLA Pricelist for options.

Options Available:



KENSINGTON SERIES



DECORATIVE (CATEGORY P)

The Kensington Series combines tradition with modern architecture, providing a classic gas lantern replica from early road lighting periods.

The luminaire is constructed from cast aluminium and incorporates glass panels. The optical control is created by an injection moulded acrylic prismatic refractor providing compliance to AS1158 Category P Minor Road Lighting standards and AS1158.6.

The standard colour finish is Black Powder Coat with special colours available to order. The control gear is integral HPF, 240V/250V and housed in the top section of the luminaire with hinges for ease of lamp replacement and maintenance.


PE cell control is available. A range of heritage style columns and accessories such as ladder rests and colonial windows are available to enhance the authenticity of the Kensington range. Metal Halide light sources are available with igniter reactor gear as an option. I.P. 54 To fit pole spigot 76.0 O.D.

LUMINAIRE CONSTRUCTION


- Die-cast aluminium body and canopy
- IP54 optical & gear chamber with refractor and glass windows
- Post top mounting fits 76mm OD pipe.
- Black polyester powdercoat finish as standard

FEATURES

- 26W CF-100W HID lamps
- Integral 250V HPF control gear
- Options:
 - Heritage Windows
 - D2 type photoelectric control switch
 - Polyester powdercoat finish in various RAL colours

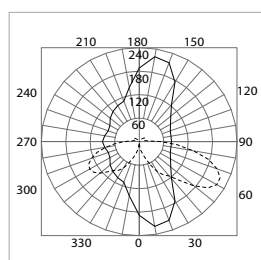


Kensington 70HPS
 Vertical Plane Through Horizontal Angles (10-190)
 ——— Horizontal Cone Through Vertical Angle (62.5)
 cd/klm

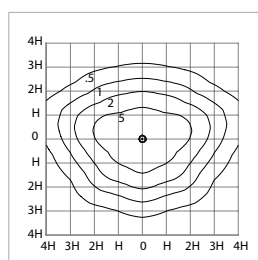

Kensington 70HPS
 H = 4.5m

H	Multiplier
4.0	1.27
4.5	1.00
5.0	0.81

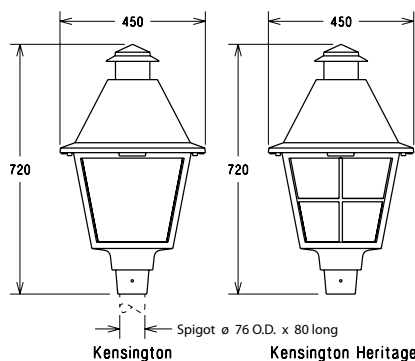

Kensington

Kensington Heritage



Kensington



Kensington Heritage



KENSINGTON SERIES



Description	Type	Base	Lamp	Weight	Order Code
Kensington 32W CF	Compact Fluorescent	GX24q-3	Lynx CFTE32W	13.8kg	LF9800L
Kensington 42W CF	Compact Fluorescent	GX24q-4	Lynx CFTE42W	13.8kg	LF9700L
Kensington 80W MV	Mercury Vapour	E27	HSLBW80	14.6kg	LF1100L
Kensington 70W HPS	High Pressure Sodium	E27	SHF70/CO/I	14.8kg	LF4100L
Kensington 100W HPS	High Pressure Sodium	E27	SHF100/CO/I	15.0kg	LF4700L
Kensington 100W MA	Metal Halide	E27	M100/CO/U	15.0kg	LF1900L

Note: the above codes are for standard products only. Please refer to SLA Pricelist for options.

AVENUE SERIES



DECORATIVE (CATEGORY P)

The Sylvania Avenue Series presents the opportunity to create modern, energy efficient street lighting systems, whilst maintaining a unique contemporary appearance.

A curved bracket arm is fastened to the support pole by a cast flange supporting the curved bracket arm, to which the fixture and an appropriately shaped canopy is attached. The unobtrusive optical system ensures an efficient light distribution. Metal Halide light sources are available with igniter reactor gear.

The Avenue Series fixture is a complete integral unit with lamp and control gear easily accessible for maintenance. For ease of transport the unit is supplied packaged as luminaire, canopy and curved bracket arm.



Complementary to this series of luminaires is a range of Sylvania Estate Columns.

LUMINAIRE CONSTRUCTION


- Pressure die-cast aluminium body with spun aluminium canopy
- IP54 optical & gear chamber with acrylic refractor
- Post top mounting bracket fits 76mm OD pipe.
- Black polyester powdercoat finish as standard

FEATURES

- 26W CF - 80W HID lamps
- Avenue mounting bracket
- Integral 250V HPF control gear
- Options:
 - D2 type photoelectric control switch
 - Glare shield
 - Polyester powdercoat finish in various colours

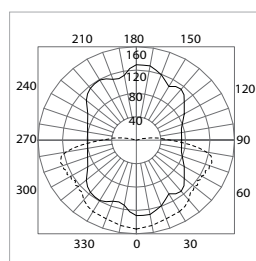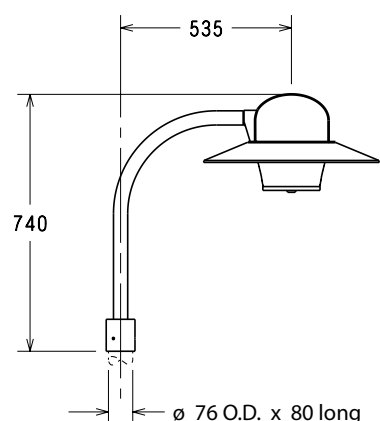

Avenue 42W CFL
 --- Vertical Plane Through Horizontal Angles (10-190)
 --- Horizontal Cone Through Vertical Angle (62.5)
 cd/klm

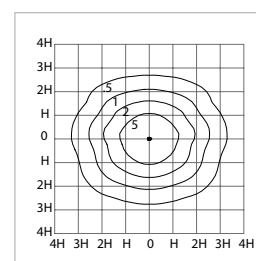

Avenue 42W
 H = 4.5m

H	Multiplier
4.0	1.27
4.5	1.00
5.0	0.81



AVENUE SERIES

Description	Type	Base	Lamp	Weight	Order Code
Avenue 32W CF	Compact Fluorescent	GX24q-3	Lynx-CFTE32W	5.8kg	LQ9800L
Avenue 50W MV	Mercury Vapour	E27	HSLBW50	6.6kg	LQ1000L
Avenue 80W MV	Mercury Vapour	E27	HSLBW80	6.6kg	LQ1100L
Avenue 70W HPS	High Pressure Sodium	E27	SHP 70/CO/I	6.7kg	LQ4100L
Avenue 70W MA	Metal Halide	E27	M70/CO/U	6.7kg	LQ27102L

Note: the above codes are for standard products only. Please refer to SLA Pricelist for options.



NOSTALGIA SERIES



DECORATIVE [CATEGORY P]

The Sylvania Nostalgia Series presents the opportunity to create modern, energy efficient street lighting systems, whilst maintaining a nostalgia period appearance.

A curved bracket arm is fastened to the support pole by a solid cast decorative flange supporting the simply curved bracket arm, to which the fixture and an appropriately shaped canopy is attached.

The unobtrusive optical system ensures an efficient light distribution.

Metal Halide light sources are available with ignitor reactor gear.

The Nostalgia fixture is a complete integral unit with lamp and control gear easily accessible for maintenance and is supplied packaged as luminaire, canopy and curved bracket arm. PE cell control is available. To fit pole spigot 76.0 O.D. I.P. 54



Complementary to this series of luminaires is a range of Sylvania Estate Columns.

LUMINAIRE CONSTRUCTION


- Pressure die-cast aluminium body with spun aluminium canopy
- IP54 optical & gear chamber with acrylic refractor
- Post top mounting bracket fits 76mm OD pipe.
- Black polyester powdercoat finish as standard

FEATURES

- 26W CF - 80W HID lamps
- Nostalgia mounting bracket
- Integral 250V HPF control gear
- Options:
 - D2 type photoelectric control switch
 - Glare shield
 - Polyester powdercoat finish in various colours

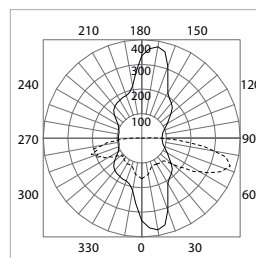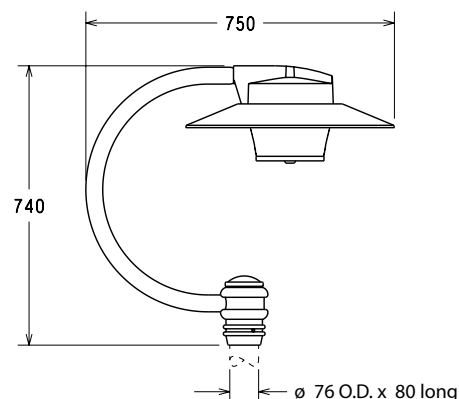

Nostalgia 70MH
 --- Vertical Plane Through Horizontal Angles (10-190)
 --- Horizontal Cone Through Vertical Angle (62.5)
 cd/klm

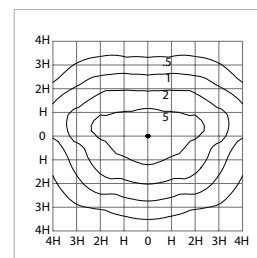

Nostalgia 70W MH
 H = 4.5m

H	Multiplier
4.0	1.27
4.5	1.00
5.0	0.81

NOSTALGIA SERIES



Description	Type	Base	Lamp	Weight	Order Code
Nostalgia 32W CF	Compact Fluorescent	GX24q-3	Lynx-CFTE32W	7.6kg	LB9800L
Nostalgia 50W MV	Mercury Vapour	E27	HSLBW50	7.6kg	LB1000L
Nostalgia 80W MV	Mercury Vapour	E27	HSLBW80	7.6kg	LB11100L
Nostalgia 70W HPS	High Pressure Sodium	E27	SHP70/CO/I	7.9kg	LB41100L
Nostalgia 70W MA	Metal Halide	E27	M70/CO/U	7.9kg	LB1900L

Note: the above codes are for standard products only. Please refer to SLA Pricelist for options.

Options Available:





BANCHIORY GREEN,
HILLSIDE,
VICTORIA

BOURKE HILL ECO SERIES



DECORATIVE [CATEGORY P]

The Bourke Hill Eco series is a Heritage style luminaire presenting the appearance of the past, yet featuring energy efficient compact fluorescent lamp, modern state-of-the-art light control and manufacturing precision. The body is cast aluminium and the decorative shade ring is spun aluminium. Control gear is integral and PE cell control is available.

The light distribution is provided by two systems, namely:

Bourke Hill Eco - S Series

Utilising the high performance optics of the Suburban Eco series with an acrylic visor for tubular and diffuse lamp sources, complying with AS1158 requirements.

Bourke Hill Eco - A series

Utilising high performance optics of the Urban Aero-Screen series with a flat glass visor for tubular and diffuse lamp sources, complying with AS1158 requirements.

Complementary to this series of luminaires is a range of Sylvania Estate Columns.

LUMINAIRE CONSTRUCTION

- Pressure die-cast aluminium body with spun aluminium canopy
- IP54 optical & gear chamber
- Top entry mounting
- Black polyester powdercoat finish as standard
- Classic skirt as standard.

FEATURES

- 26W CF - 42W CF lamps
- Integral 250V HPF control gear
- Options:
 - Side entry mounting fits 34mm O.D. pipe
 - D2 type photoelectric control switch
 - Dome and Flared canopies
 - Various bracket arms
 - Polyester powdercoat finish in various colours




Classic Skirt

S Series




Classic Skirt

A Series

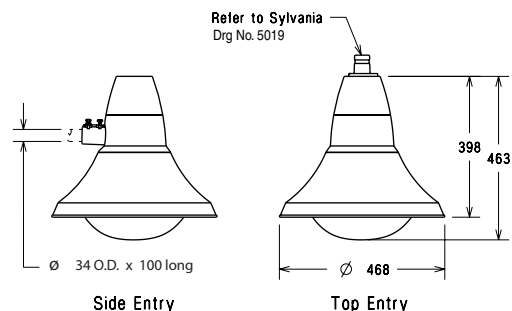


Side Entry

Top Entry

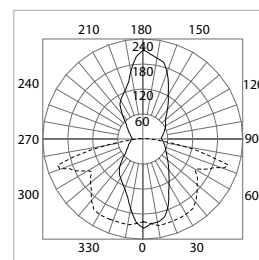

Bourke Hill Eco - A 42W CFL
 ... Vertical Plane Through Horizontal Angles (270-90)
 — Horizontal Cone Through Vertical Angle (72.5)
 cd/klm

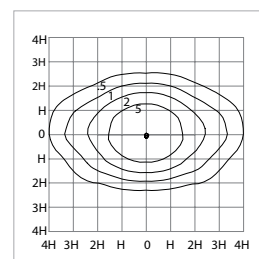

Bourke Hill Eco - A 42W CFL
 H = 4.5m

BOURKE HILL ECO SERIES



Description	Type	Base	Lamp	Weight	Order Codes
Bourke Hill Eco S 26W CF	Compact Fluorescent	GX24q-3	Lynx-CFTE26W	4.4kg	NB9610L
Bourke Hill Eco S 32W CF	Compact Fluorescent	GX24q-3	Lynx-CFTE32W	4.4kg	NB9800L
Bourke Hill Eco S 42W CF	Compact Fluorescent	GX24q-4	Lynx-CFTE32W	4.7kg	NB9700L
Bourke Hill Eco A 32W CF	Compact Fluorescent	GX24q-3	Lynx-CFTE32W	4.4kg	NB9600L
Bourke Hill Eco A 32W CF	Compact Fluorescent	GX24q-3	Lynx-CFTE32W	4.4kg	NB9810L
Bourke Hill Eco A 42W CF	Compact Fluorescent	GX24q-4	Lynx-CFTE32W	4.7kg	NB9710L

Note: The above codes are for standard products only. Please refer to SLA Pricelist for options.

Refer to Page 199 for Bourke Hill LED

BOURKE HILL HID SERIES



DECORATIVE (CATEGORY P)

The Bourke Hill series is a Heritage style luminaire presenting the appearance of the past, yet featuring modern state-of-the-art light control and manufacturing precision. The body is cast aluminium and the decorative shade ring is spun aluminium. Control gear is integral and PE cell control is available.

The light distribution is provided by three systems, namely:

Bourke Hill - R Series

Utilising a prismatic refractor in moulded acrylic for diffuse lamp sources, complying AS1158 requirements.

Bourke Hill - S Series

Utilising the high performance optics of the Urban series with an acrylic visor for tubular and diffuse lamp sources, complying with AS1158 requirements.

Bourke Hill - A Series

Utilising high performance optics of the Urban Aero-Screen series with a flat glass visor for tubular and diffuse lamp sources, complying with AS1158 requirements.

Complementary to this series of luminaires is a range of Sylvania Estate Columns.

LUMINAIRE CONSTRUCTION

- Pressure die-cast aluminium body with spun aluminium canopy
- IP54 optical & gear chamber
- Top entry mounting
- Black polyester powdercoat finish as standard
- Classic skirt as standard.

FEATURES

- 42W CF - 125W HID lamps
- Integral 250V HPF control gear
- Options:
 - Side entry mounting fits 34mm O.D. pipe
 - D2 type photoelectric control switch
 - Dome and Flared canopies (Brighton only available in Mod-R)
 - Various bracket arms
 - Polyester powdercoat finish in various colours




Brighton Skirt
R Series

Flared Skirt
R Series




Classic Skirt
A Series

Dome Skirt
S Series

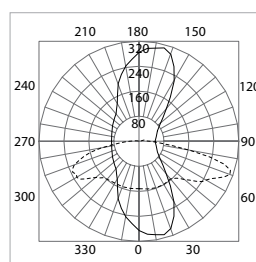

Bourke Hill - S 100W MH
--- Vertical Plane Through Horizontal Angles (255-75)
— Horizontal Cone Through Vertical Angle (70)
cd/klm

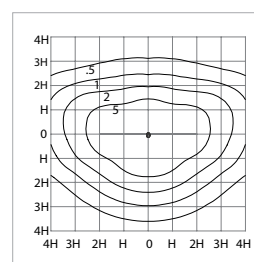

Bourke Hill - S 100W MH
H = 4.5m


H	Multiplier
4.0	1.27
4.5	1.00
5.0	0.81



BOURKE HILL SERIES

Description	Type	Base	Lamp	Weight	Order Code
Bourke Hill R 42W CF	Compact Fluorescent	GX24q-4	Lynx-CFTE42W	4.4kg	NB9700L
Bourke Hill R 80W MV	Mercury Vapour	E27	HSLBW80	5.2kg	NB11100L
Bourke Hill R 70W HPS	High Pressure Sodium	E27	SHP 70/CO/I	5.6kg	NB41100L
Bourke Hill R 70W MA	Metal Halide	E27	M70/CO/U	5.6kg	NB27100L
Bourke Hill S 42W CF	Compact Fluorescent	GX24q-4	Lynx-CFTE42W	4.7kg	NB9700L
Bourke Hill S 80W MV	Mercury Vapour	E27	HSLBW80	5.5kg	NB11109L
Bourke Hill S 125W MV	Mercury Vapour	E27	HSLBW125	6.0kg	NB13109L
Bourke Hill S 70W HPS	High Pressure Sodium	E27	SHP 70/CO/I	6.0kg	NB41109L
Bourke Hill S 100W HPS	High Pressure Sodium	E27	SHP100	6.5kg	NB47109L
Bourke Hill S 70W MA	Metal Halide	E27	M70/CO/U	6.0kg	NB27109L
Bourke Hill S 100W MA	Metal Halide	E27	M100/CO/U	6.5kg	NB19109L
Bourke Hill A 42W CF	Compact Fluorescent	GX24q-4	Lynx-CFTE42W	4.7kg	NB9701L
Bourke Hill A 80W MV	Mercury Vapour	E27	HSLBW80	5.5kg	NB1101L
Bourke Hill A 125W MV	Mercury Vapour	E27	HSLBW125	6.0kg	NB1301L
Bourke Hill A 70W HPS	High Pressure Sodium	E27	SHP70/CO/I	6.0kg	NB4101L
Bourke Hill A 100W HPS	High Pressure Sodium	E27	SHPT100	6.5kg	NB4701L
Bourke Hill A 70W MA	Metal Halide	E27	M70/CO/U	6.0kg	NB2701L
Bourke Hill A 100W MA	Metal Halide	E27	M100/CO/U	6.5kg	NB1901L

Note: the above codes are for standard products only. Please refer to SLA Pricelist for options.

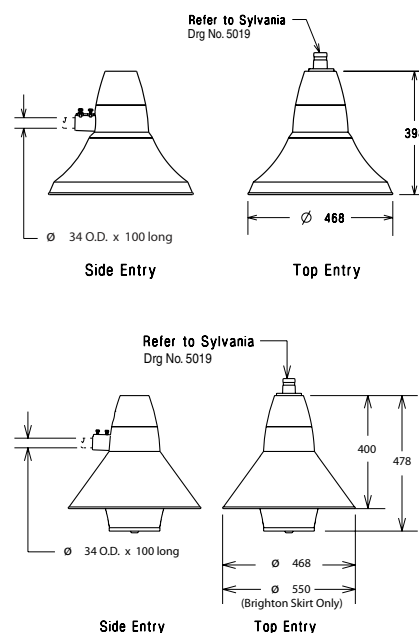

PARKVILLE SERIES



DECORATIVE [CATEGORY V]

The Parkville series is a Heritage style luminaire presenting the appearance of the past, yet featuring modern state-of-the-art light control and manufacturing precision. The body is cast aluminium and the decorative shade ring is spun aluminium. Control gear is integral and PE cell control is available.

A complementary luminaire to the Bourke Hill Series, this larger unit is modelled on an updated Heritage theme, extending the luminaire range into the larger wattages. Light distribution is provided by:

Parkville D Series

Utilising a decorative acrylic teardrop visor which is supported by the optics of the Roadster series for diffuse lamp sources.

Parkville S Series

Utilising the high performance optics of the Roadster for tubular lamp sources complying with AS1158.6

Parkville A Series

Utilising the high performance optics of the Roadster aero-screen series for tubular lamp sources complying with AS1158.6.

Complementary to this series of luminaires is a range of Sylvania Estate Columns.

LUMINAIRE CONSTRUCTION

- Pressure die-cast aluminium body with spun aluminium canopy
- IP54 optical & gear chamber
- Top entry mounting
- Black polyester powdercoat finish as standard
- Classic skirt as standard

FEATURES

- 150W - 250W HID lamps
- Integral 250V HPF control gear
- Options:
 - Side entry mounting fits 43mm O.D. pipe
 - NEMA type photoelectric control switch
 - Dome and Flared canopies
 - Various bracket arms
 - Polyester powdercoat finish in various colours



Classic Skirt

D Series




Flared Skirt

S Series



Dome Skirt

A Series

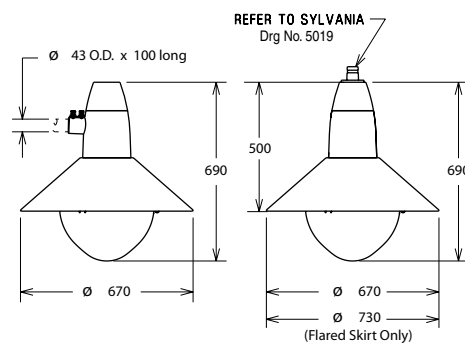

SIDE ENTRY

TOP ENTRY


D SERIES WITH CLASSIC SKIRT

PARKVILLE SERIES




Description	Type	Base	Lamp	Weight	Order Code
Parkville A 250W MV	Mercury Vapour	E39/40	HSLBW250	13.5kg	NX1501L
Parkville A 150W HPS	High Pressure Sodium	E39/40	SHPT150	13.5kg	NX4201L
Parkville A 250W HPS	High Pressure Sodium	E39/40	SHPT250	14.0kg	NX4301L
Parkville A 100W MA	Metal Halide	E27	M100/CO/U	13.0kg	NX1901L
Parkville A 150W MA	Metal Halide	E40	M150/CO/U	13.5kg	NX2601L
Parkville S 250W MV	Mercury Vapour	E39/40	HSLBW250	13.5kg	NX1502L
Parkville S 150W HPS	High Pressure Sodium	E39/40	SHPT150	13.5kg	NX4202L
Parkville S 250W HPS	High Pressure Sodium	E39/40	SHPT250	14.0kg	NX4302L
Parkville S 100W MA	Metal Halide	E39/40	M100/CO/U	13.0kg	NX1902L
Parkville S 150W MA	Metal Halide	E39/40	M150/CO/U	13.5kg	NX2602L
Parkville D 250W MV	Mercury Vapour	E39/40	HSLBW250	13.5kg	NX15100L
Parkville D 150W HPS	High Pressure Sodium	E39/40	SHPT150	13.5kg	NX42100L
Parkville D 250W HPS	High Pressure Sodium	E39/40	SHPT250	14.0kg	NX43100L
Parkville D 100W MA	Metal Halide	E27	M100/CO/U	13.0kg	NX1900L
Parkville D 150W MA	Metal Halide	E27	M150/CO/U	13.5kg	NX26100L

Note: the above codes are for standard products only. Please refer to SLA Pricelist for options.

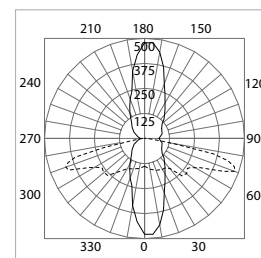

Parkville-S 250HPS
 --- Vertical Plane Through Horizontal Angles (10-190)
 --- Horizontal Cone Through Vertical Angle (62.5)
 cd/km

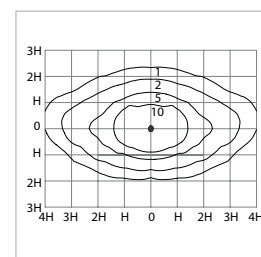

Parkville - S 250 HPS
 H = 12m Upcast 0

H	Multiplier
10.5	1.31
12.0	1.00
13.5	0.79

BRACKET FIXTURE OPTIONS

To complement our decorative feature series, a colourful range of bracket assemblies are available to suit the specific needs of your installation.

		Avenue Bracket	Nostalgia Bracket	Modular Single Small Bracket	Modular Single Large Bracket	Modular Double Small Bracket	Modular Single Wall Bracket
Bourke Hill	Classical						
	Flared						
	Domed						
Parkville	Classical						
	Flared						
	Domed						
B2223	Avenue						
	Nostalgia						

Colours


- Black
- Claret
- Federation Red
- Deep Brunswick
- Heritage Green
- Wizard Blue
- Dark Grey Blue
- *Wilderness
- Stromboli
- Apo Grey
- Stone Beige Satin
- Primrose

ROADWAY

SYLVANIA DECORATIVE STREETSCAPE SYSTEMS



SYLVANIA DECORATIVE STREETSCAPE SYSTEMS

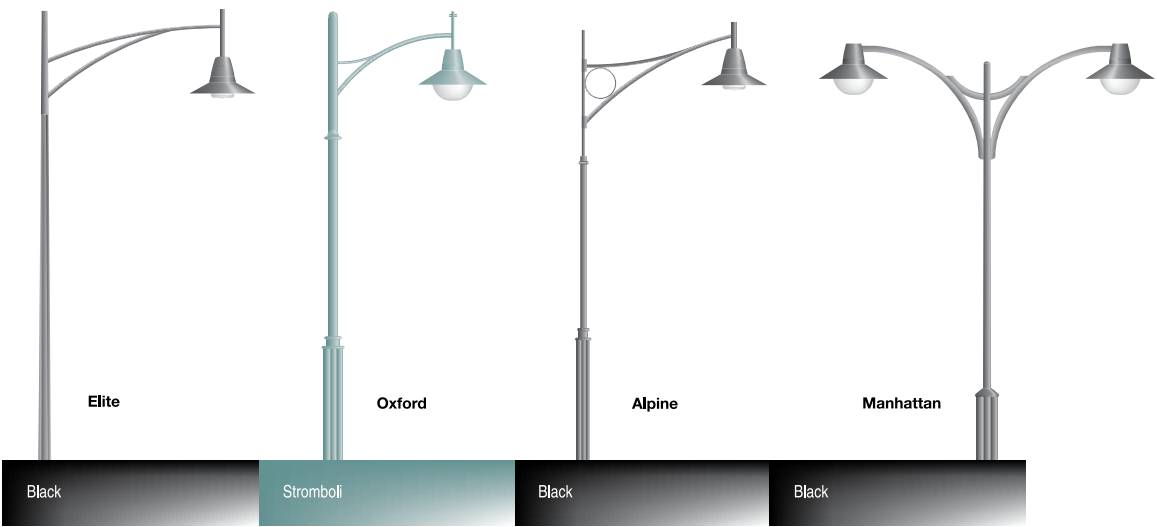

ROADWAY